INSTRUKCJA MONTAŻU
HLA3-MD
Czujnik Ruchu

ul. Bocznicowa 13
05-850 Jawczyce
www.bemko.eu

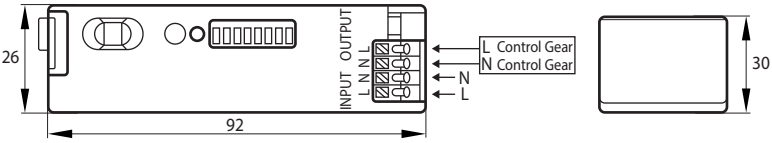

Ustaw przełącznik na „ON"
Toggle up the DIP Switch to „ON"



Zasięg detekcji
Detection Area

1	2		Detection Radius
ON	ON	100%	Around 5 meters
–	ON	75%	Around 4 meters
ON	–	50%	Around 2.5 meters
–	–	25%	Around 1.5 meters

Czas zatrzymania
Hold Time

3	4	5	
ON	ON	ON	5s
–	ON	ON	30s
ON	–	ON	90s
–	–	ON	5min
ON	ON	–	20min
–	–	–	30min

Czujnik zmierzchu
Daylight Sensor

6	7	8	
ON	ON	ON	2 Lux
ON	ON	–	10 Lux
–	ON	–	30 Lux
ON	–	–	50 Lux
–	–	–	Disable

①

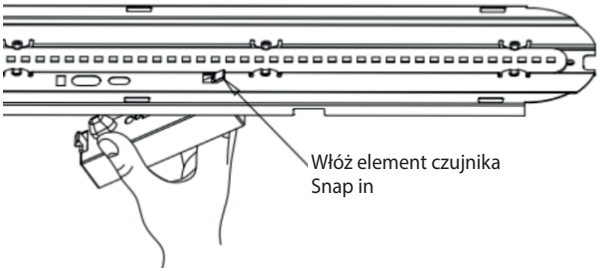
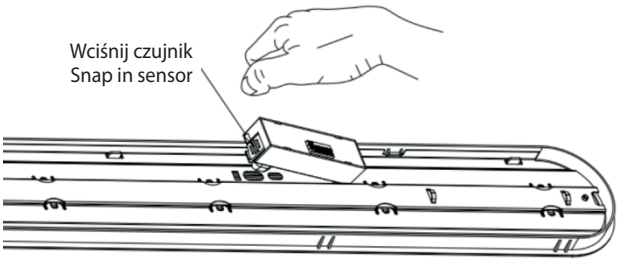
②