

BLS BACKLIGHT SUPERIOR

LED-LEUCHTENN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► Aluminiumlegierung, Kunststoff

230V
50Hz

DF
≥0.9

3000K
4000K
6500K

CRI
≥80

CRI
≥90

90°

IK03

100000h*
L80 B70

IP20 ↓
IP44 ↑


IP20 ↓
IP65 ↑

+45°C
-10°C

BLS-CCT




www.tuv.com
ID 1111249087

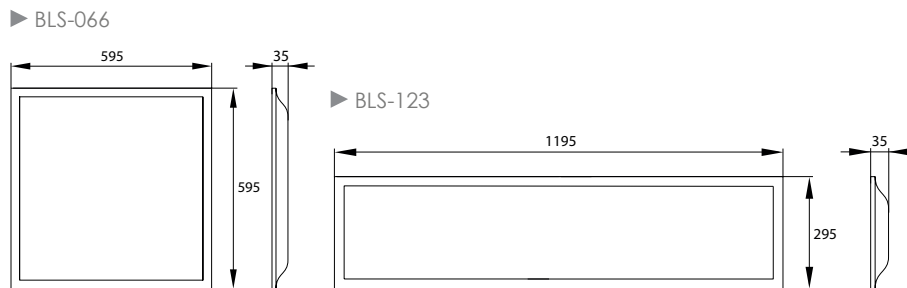

AGT power supply included



quick-connect power supply for easy installation



new versions and higher luminous efficacy – 150 lm/W



compatible with an emergency lighting module



certificate of the National Institute of Hygiene



code

C72-BLS-066-200-4K-WH-U19
C72-BLS-123-200-4K-WH-U19
C72-BLS-066-260-4K-WH-U19
C72-BLS-123-260-4K-WH-U19
C72-BLS-066-340-4K-WH-U19
C72-BLS-123-340-4K-WH-U19
C72-BLS-066-410-4K-WH-U19
C72-BLS-123-410-4K-WH-U19
C72-BLS-066-420-CCT-WH



EAN

5900280987341
5900280987358
5900280987365
5900280987372
5900280987389
5900280987396
5900280987402
5900280987419
5900280997210



package

1/6
1/6
1/6
1/6
1/6
1/6
1/6
1/6
1/6



colour temperature [K]

4000
4000
4000
4000
4000
4000
4000
4000
4000
3000 / 4000 / 6500



power [W]

20
20
20
26
26
34
34
41
41
30 / 36 / 42



luminous flux [lm]

3000
3000
4000
4000
5000
5000
6000
6000
4310/5100/5620

*Durability data updated based on the latest LM-80 reports.