



# OVERCURRENT CIRCUIT BREAKER 3P

Schelinger

LEITUNGSSCHUTZSCHALTER 3P  
 NADPROUDOVÝ JISTIČ 3P  
 ВЫКЛЮЧАТЕЛЬ МАКСИМАЛЬНОГО ТОКА 3Ф  
 INTERRUOTORE DI SOVRACORRENTE TRIFASE

G8-3P (MCB)


NEW

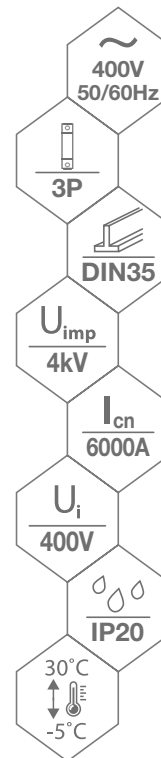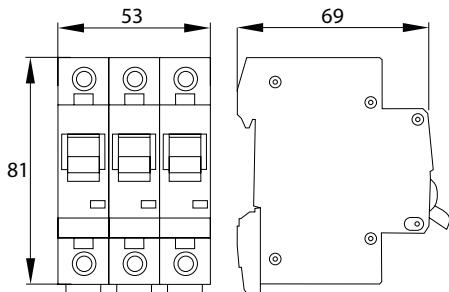

Certificate No. 40057107



terminal capacity:  
max. 25mm<sup>2</sup>



possibility  
of sealing




trip indicator light



possibility to connect  
with comb rails



DIN35 rail mounting



descriptive box

Schelinger

code

A02-G8-3P-B06  
 A02-G8-3P-B10  
 A02-G8-3P-B16  
 A02-G8-3P-B20  
 A02-G8-3P-B25  
 A02-G8-3P-B32  
 A02-G8-3P-B40  
 A02-G8-3P-B50  
 A02-G8-3P-B63  
 A02-G8-3P-C06  
 A02-G8-3P-C10  
 A02-G8-3P-C16  
 A02-G8-3P-C20  
 A02-G8-3P-C25  
 A02-G8-3P-C32  
 A02-G8-3P-C40  
 A02-G8-3P-C50  
 A02-G8-3P-C63



EAN

5900280970855  
 5900280970862  
 5900280970879  
 5900280970886  
 5900280970893  
 5900280970909  
 5900280970916  
 5900280970923  
 5900280970930  
 5900280970947  
 5900280970954  
 5900280970961  
 5900280970978  
 5900280970985  
 5900280970992  
 5900280971005  
 5900280971012  
 5900280971029



package

1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40  
 1/4/40



characteristics

B  
 B  
 B  
 B  
 B  
 B  
 B  
 B  
 B  
 C  
 C  
 C  
 C  
 C  
 C  
 C  
 C  
 C  
 C  
 C

$I_n$

rated current [A] /  
Nennstrom [A]

6  
 10  
 16  
 20  
 25  
 32  
 40  
 50  
 63  
 6  
 10  
 16  
 20  
 25  
 32  
 40  
 50  
 63