
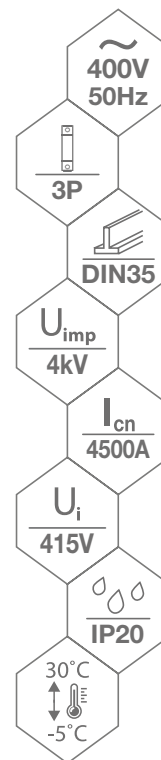


OVERCURRENT CIRCUIT BREAKER 3P

Schelinger

LEITUNGSSCHUTZSCHALTER 3P
 NADPROUDOVÝ JISTIČ 3P
 ВЫКЛЮЧАТЕЛЬ МАКСИМАЛЬНОГО ТОКА 3Ф
 INTERRUOTORE DI SOVRACORRENTE TRIFASE

G7-3P (MCB)

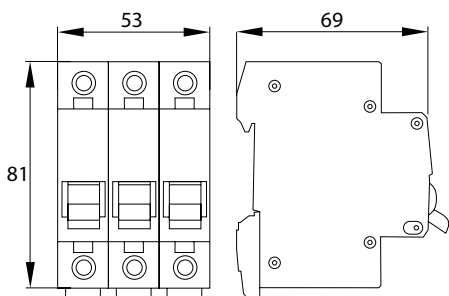


CERTIFICATE No.
 B 092999 0007 Rev. 00



terminal capacity:
 max. 25mm²



possibility of sealing



trip indicator light



galvanised steel
 terminal



possibility to connect
 with comb rails



descriptive box

Schelinger

code

A02-G7-3P-B06
 A02-G7-3P-B10
 A02-G7-3P-B16
 A02-G7-3P-B20
 A02-G7-3P-B25
 A02-G7-3P-B32
 A02-G7-3P-B40
 A02-G7-3P-B50
 A02-G7-3P-B63
 A02-G7-3P-C06
 A02-G7-3P-C10
 A02-G7-3P-C16
 A02-G7-3P-C20
 A02-G7-3P-C25
 A02-G7-3P-C32
 A02-G7-3P-C40
 A02-G7-3P-C50
 A02-G7-3P-C63



EAN

5900280954237
 5900280954244
 5900280954251
 5900280954268
 5900280954275
 5900280954282
 5900280954299
 5900280954305
 5900280954312
 5900280954329
 5900280954336
 5900280954343
 5900280954350
 5900280954367
 5900280954374
 5900280954381
 5900280954398
 5900280954404



package

1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40
 1/4/40



characteristics

B
 B
 B
 B
 B
 B
 B
 B
 B
 C
 C
 C
 C
 C
 C
 C
 C
 C
 C
 C
 C
 C

I_n

rated current [A]

6
 10
 16
 20
 25
 32
 40
 50
 63
 6
 10
 16
 20
 25
 32
 40
 50
 63