

BLD DENAR


LED-PANEL
PANNELLO LED
LED PANEL
ПАНЕЛЬ LED

MATERIAL ► aluminum alloy, lamp cover: PMMA
MATERIAL ► aluminiumlegierung, schirm: PMMA
materiale: alluminio, PMMA


- 230 V
50 Hz
- DF
≥0.9
- 4000K
- CRI
≥80
- 120°
- IK05
- L70B50
50000h
- +45°C
-20°C
- IP20
IP44
- CLASS II



BLD-044



**Standard enclosure colours: white, silver, graphite, black

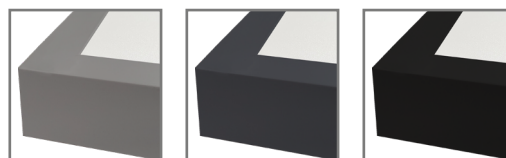

enclosure can be made in any RAL colour



AGT power supply included



versions with passive infrared sensor (PIR)



possibility of installing an emergency system



certificate of the National Institute of Hygiene (PZH)

LUXMENA	EAN	package	colour temperature [K]	P _{ON} power [W]	luminescence luminous flux [lm]	energy class
code	EAN					
C72-BLD-044-320-4K-WH	5900280951588	1/10	4000	32	3500	E
C72-BLD-044-320-4K-BL	5900280956972	1/10	4000	32	3500	E
C72-BLD-044-320-4K-GR	5900280956989	1/10	4000	32	3500	E
C72-BLD-044-320-4K-SL	5900280956996	1/10	4000	32	3500	E
C72-BLD-044-320-4K-WH-PIR	5900280957030	1/10	4000	32	3500	E
C72-BLD-044-320-4K-BL-PIR	5900280957009	1/10	4000	32	3500	E
C72-BLD-044-320-4K-GR-PIR	5900280957016	1/10	4000	32	3500	E
C72-BLD-044-320-4K-SL-PIR	5900280957023	1/10	4000	32	3500	E