



# OVERCURRENT CIRCUIT BREAKER 3P

Schelinger

LEITUNGSSCHUTZSCHALTER 3P  
 NADPROUDOVÝ JISTIČ 3P  
 ВЫКЛЮЧАТЕЛЬ МАКСИМАЛЬНОГО ТОКА 3Ф  
 INTERRUOTORE DI SOVRACORRENTE TRIFASE

G9-3P (MCB)

**NEW**

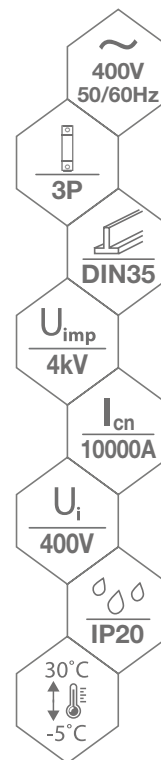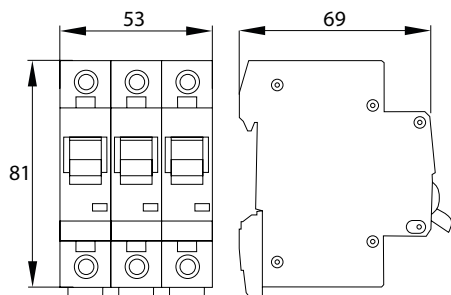


Certificate No. 40057107



terminal capacity:  
max. 25mm<sup>2</sup>



possibility of sealing




trip indicator light



possibility to connect  
with comb rails



DIN35 rail mounting



descriptive box

## Schelinger

### code

A02-G9-3P-B06  
 A02-G9-3P-B10  
 A02-G9-3P-B16  
 A02-G9-3P-B20  
 A02-G9-3P-B25  
 A02-G9-3P-B32  
 A02-G9-3P-B40  
 A02-G9-3P-B50  
 A02-G9-3P-B63  
 A02-G9-3P-C06  
 A02-G9-3P-C10  
 A02-G9-3P-C16  
 A02-G9-3P-C20  
 A02-G9-3P-C25  
 A02-G9-3P-C32  
 A02-G9-3P-C40  
 A02-G9-3P-C50  
 A02-G9-3P-C63



### EAN

5900280980403  
 5900280980410  
 5900280980427  
 5900280980434  
 5900280980441  
 5900280980458  
 5900280980465  
 5900280980472  
 5900280980489  
 5900280980496  
 5900280980502  
 5900280980519  
 5900280980526  
 5900280980533  
 5900280980540  
 5900280980557  
 5900280980564  
 5900280980571



### package

1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120  
 1/12/120



### characteristics

B  
 B  
 B  
 B  
 B  
 B  
 B  
 B  
 B  
 C  
 C  
 C  
 C  
 C  
 C  
 C  
 C

## I<sub>n</sub>

### rated current [A]

6  
 10  
 16  
 20  
 25  
 32  
 40  
 50  
 63  
 6  
 10  
 16  
 20  
 25  
 32  
 40  
 50  
 63