

AVN AVENUE

LED-STRABENLEUCHE
 ARMATURA LED STRADALE
 LED POULIČNÍ SVÍTIDLO
 УЛИЧНЫЙ СВЕТИЛЬНИК LED

MATERIAL ► aluminum alloy, tempered glass
 MATERIAL ► aluminiumlegierung, gehärtetes glas
 materiale: alluminio, vetro temperato

- 230V
50Hz
- DF
≥0.95
- CRI
≥70
- 150°x78°
- IK08
IK09
- 100000h
L90B10
- +50°C
-40°C
- IP66



**POLSKI
 PRODUKT** **GWARANCJA
 JAKOŚCI**

up to **185 lm/W**

NEW

**5 YEARS
 WARRANTY**


Lit by
LUMILEDS

SOSEN
 LED DRIVER

ENEC 18

PLUS
 18

	A [mm]	B [mm]	C [mm]
AVN-025:	493	174	108
AVN-030:	493	174	108
AVN-040:	493	174	108
AVN-050:	493	174	108
AVN-060:	562	200	108
AVN-080:	562	200	108
AVN-100:	607	240	108
AVN-120:	607	240	108
AVN-150:	680	260	108

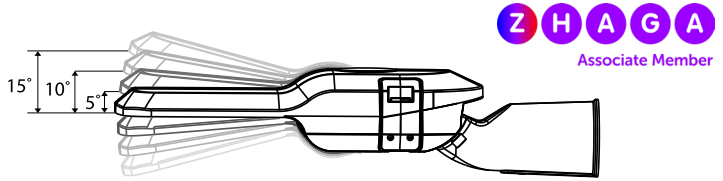

Z H A G A
 Associate Member



luminaire equipped with a pressure equalisation filter



safety scissor-type voltage disconnect



installation on Ø48-Ø60 poles



tilt angle adjustment



isolated power supply SOSEN

LLIXMENA

code
C82-AVN-030B0
C82-AVN-050B0
C82-AVN-075B0
C82-AVN-100B0
C82-AVN-150B0
C82-AVN-200B0
C82-AVN-250B0



supply system SOSEN
SS-30GA-E62Bx
SS-50GA-E62Bx
SS-75GA-E62Bx
SS-100GA-E62Bx
SS-1500GA-E62Bx
SS-200GA-E62Bx
SS-250GA-E62Bx



colour temperature [K]
2700 / 3000 / 4000 / 5000 / 5700 / 6500

P_{ON}

power [W]
5 - 30
6 - 50
10 - 75
15 - 100
18 - 150
25 - 200
30 - 250



enclosure dimension [mm]
493x174x108
493x174x108
562x200x108
607x240x108
680x260x108
680x260x108
776x300x108

*Warranty conditions can be extended.