

400V
50/60Hz

3P

DIN35



U_{imp}
4kV

I_{cn}
10000A

U_i
400V

IP20

+30°C
-5°C

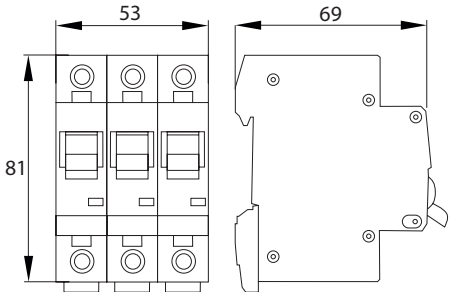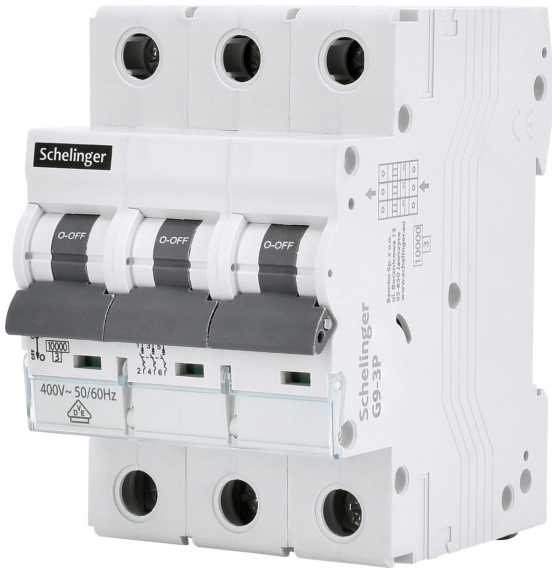

Certificate No. 40057107



terminal capacity:
max. 25 mm²



possibility
of sealing



capability to connect
using comb busbars



descriptive box

Schelinger

code

- A02-G9-3P-B02
- A02-G9-3P-B04
- A02-G9-3P-B06
- A02-G9-3P-B10
- A02-G9-3P-B13
- A02-G9-3P-B16
- A02-G9-3P-B20
- A02-G9-3P-B25
- A02-G9-3P-B32
- A02-G9-3P-B40
- A02-G9-3P-B50
- A02-G9-3P-B63
- A02-G9-3P-C02
- A02-G9-3P-C04
- A02-G9-3P-C06
- A02-G9-3P-C10
- A02-G9-3P-C13
- A02-G9-3P-C16
- A02-G9-3P-C20
- A02-G9-3P-C25
- A02-G9-3P-C32
- A02-G9-3P-C40
- A02-G9-3P-C50
- A02-G9-3P-C63



EAN

- 5900280999498
- 5900280999504
- 5900280980403
- 5900280980410
- 5902138401214
- 5900280980427
- 5900280980434
- 5900280980441
- 5900280980458
- 5900280980465
- 5900280980472
- 5900280980489
- 5900280999511
- 5900280999528
- 5900280980496
- 5900280980502
- 5902138401221
- 5900280980519
- 5900280980526
- 5900280980533
- 5900280980540
- 5900280980557
- 5900280980564
- 5900280980571



package

- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40



characteristics

- B
- B
- B
- B
- B
- B
- B
- B
- B
- B
- B
- C
- C
- C
- C
- C
- C
- C
- C
- C
- C
- C

I_n

rated
current [A]

- 2
- 4
- 6
- 10
- 13
- 16
- 20
- 25
- 32
- 40
- 50
- 63
- 2
- 4
- 6
- 10
- 13
- 16
- 20
- 25
- 32
- 40
- 50
- 63