

~
230/400V
50/60Hz

1P

DIN35


U_{imp}
4kV

I_{cn}
4500A

U_i
415V

IP20

+30°C
-5°C

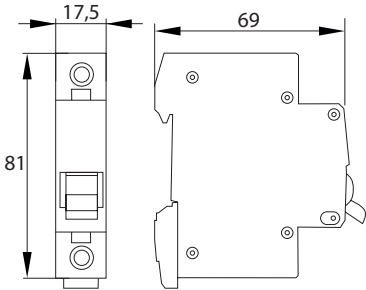

CERTIFICATE
No. B 092999 0007 Rev. 00



terminal capacity:
max. 25 mm²



possibility
of sealing



galvanised steel
terminals



capability to connect
using comb busbars



descriptive box

Schelinger



I_n

code	EAN	package	characteristics	rated current [A]
A02-G7-1P-B06	5900280954053	1/12/120	B	6
A02-G7-1P-B10	5900280954060	1/12/120	B	10
A02-G7-1P-B16	5900280954077	1/12/120	B	16
A02-G7-1P-B20	5900280954084	1/12/120	B	20
A02-G7-1P-B25	5900280954091	1/12/120	B	25
A02-G7-1P-B32	5900280954107	1/12/120	B	32
A02-G7-1P-B40	5900280954114	1/12/120	B	40
A02-G7-1P-B50	5900280954121	1/12/120	B	50
A02-G7-1P-B63	5900280954138	1/12/120	B	63
A02-G7-1P-C06	5900280954145	1/12/120	C	6
A02-G7-1P-C10	5900280954152	1/12/120	C	10
A02-G7-1P-C16	5900280954169	1/12/120	C	16
A02-G7-1P-C20	5900280954176	1/12/120	C	20
A02-G7-1P-C25	5900280954183	1/12/120	C	25
A02-G7-1P-C32	5900280954190	1/12/120	C	32
A02-G7-1P-C40	5900280954206	1/12/120	C	40
A02-G7-1P-C50	5900280954213	1/12/120	C	50
A02-G7-1P-C63	5900280954220	1/12/120	C	63