


3-POLE OVERCURRENT CIRCUIT BREAKER


LEITUNGSSCHUTZSCHALTER 3P

Schelinger


G7-3P (MCB)

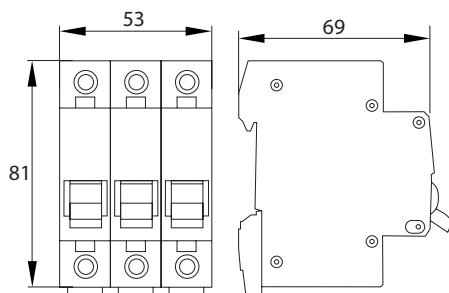


CERTIFICATE
No. B 092999 0007 Rev. 00

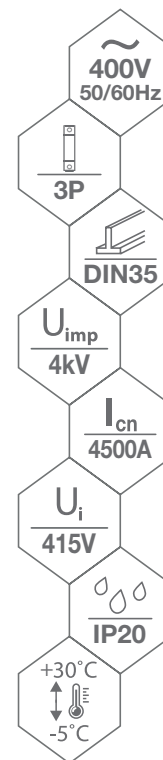

terminal capacity:
max. 25 mm²



possibility
of sealing



galvanised steel
terminals



capability to connect
using comb busbars



descriptive box

Schelinger



EAN

code

A02-G7-3P-B06
A02-G7-3P-B10
A02-G7-3P-B16
A02-G7-3P-B20
A02-G7-3P-B25
A02-G7-3P-B32
A02-G7-3P-B40
A02-G7-3P-B50
A02-G7-3P-B63
A02-G7-3P-C06
A02-G7-3P-C10
A02-G7-3P-C16
A02-G7-3P-C20
A02-G7-3P-C25
A02-G7-3P-C32
A02-G7-3P-C40
A02-G7-3P-C50
A02-G7-3P-C63

5900280954237
5900280954244
5900280954251
5900280954268
5900280954275
5900280954282
5900280954299
5900280954305
5900280954312
5900280954329
5900280954336
5900280954343
5900280954350
5900280954367
5900280954374
5900280954381
5900280954398
5900280954404



package

1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40
1/4/40



characteristics

B
B
B
B
B
B
B
B
B
C
C
C
C
C
C
C
C
C
C

I_n

rated
current [A]

6
10
16
20
25
32
40
50
63
6
10
16
20
25
32
40
50
63