

~  
400-415V  
50/60Hz

3P

DIN35

$I_{cn}$   
15000A


$U_i$   
500V

IP20

+40°C  
-25°C



NEW

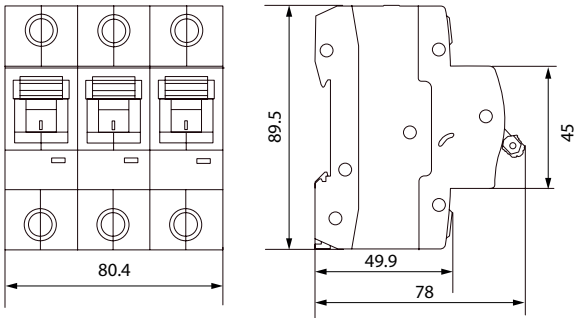

terminal capacity:  
max. 35 mm²



capability to mount  
using comb busbars

Schelinger

code

- A02-H15-3P-B080
- A02-H15-3P-B100
- A02-H15-3P-B125
- A02-H15-3P-C080
- A02-H15-3P-C100
- A02-H15-3P-C125



EAN

- 5902138400507
- 5902138400514
- 5902138400521
- 5902138400538
- 5902138400545
- 5902138400552



package

- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40
- 1/4/40



characteristics

- B
- B
- B
- C
- C
- C

$I_n$   
rated  
current [A]

- 80
- 100
- 125
- 80
- 100
- 125