

RESIDUAL CURRENT CIRCUIT BREAKER



LEITUNGSSCHUTZSCHALTER

Schelinger


V7, V8 4P (RCCB)





Certificate No. 40056931

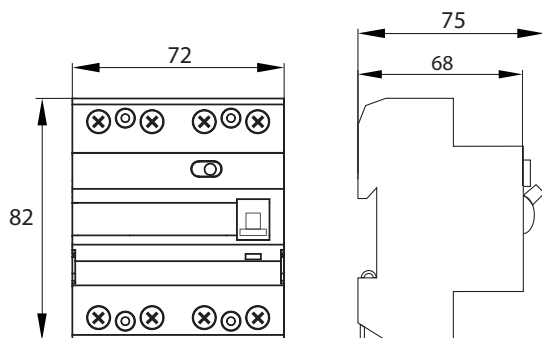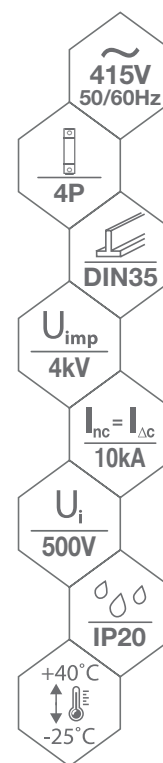


Characteristics:
V7: AC



V8: A



galvanised
steel terminal



TEST control button



capability to
connect using comb
busbars



terminal capacity max.
25 mm²



compatibility with G8
and G9 MCBs

Schelinger



code

EAN



package



type

I_n

rated current
[A]

$I_{\Delta n}$

differential current
[mA]

A03-V7-4-25-030
A03-V7-4-25-100
A03-V7-4-25-300
A03-V7-4-40-030
A03-V7-4-40-100
A03-V7-4-40-300
A03-V7-4-63-030
A03-V7-4-63-100
A03-V7-4-63-300
A03-V8-4-25-030
A03-V8-4-40-030
A03-V8-4-63-030

5900280985057
5900280981936
5900280981929
5900280985064
5900280981899
5900280981882
5900280985071
5900280981950
5900280981905
5900280973221
5900280961396
5900280973245

1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30
1/3/30

AC
AC
AC
AC
AC
AC
AC
AC
AC
A
A
A

25
25
25
40
40
40
63
63
63
25
40
63

30
100
300
30
100
300
30
100
300
30
30
30