
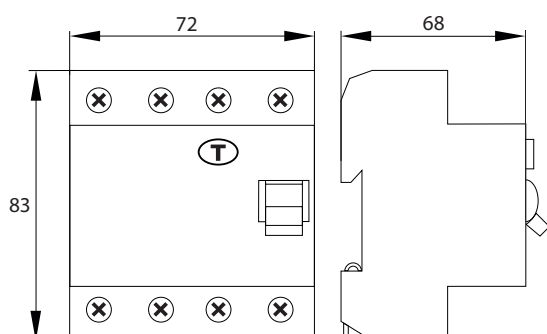


3-PHASE RESIDUAL CURRENT CIRCUIT BREAKER


Schelinger

FI-SCHUTZSCHALTER 3P


K7, K8 4P (RCCB)

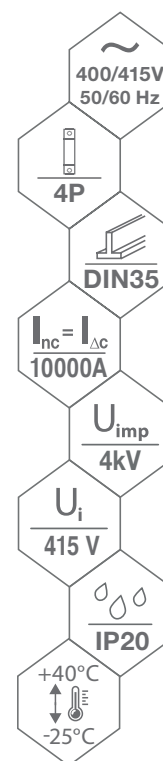

Characteristics:
K7: AC



K8: A



CERTIFICATE
No. B 092999 0006 Rev. 00



galvanised
steel terminal



TEST control button



capability to
connect using comb
busbars



terminal capacity max.
25 mm²



descriptive box

Schelinger				I_n	$I_{\Delta n}$
code	EAN	package	type	rated current [A]	differential current [mA]
A03-K7-4-25-030	5900280954442	1/50	AC	25	30
A03-K7-4-40-030	5900280954459	1/50	AC	40	30
A03-K7-4-63-030	5900280954466	1/50	AC	63	30
A03-K8-4-25-030	5900280959973	1/50	A	25	30
A03-K8-4-40-030	5900280959980	1/50	A	40	30
A03-K8-4-63-030	5900280959997	1/50	A	63	30