


RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

Schelinger




GKL (RCBO)

FI/LS-KOMBISCHALTER

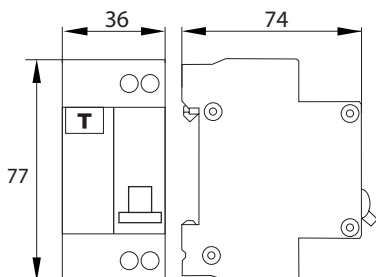

Characteristics:

AC

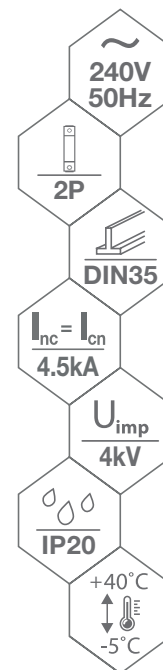

galvanised steel terminals



TEST control button



terminal capacity max.
6 mm²



possibility
of sealing

Schelinger



I_n

$I_{\Delta n}$

code

EAN

package

type

characteristics

rated
current [A]

rated
differential [mA]

A08-GKL-AC-B06

5900280962058

1/60

AC

B

6

30

A08-GKL-AC-B10

5900280962065

1/60

AC

B

10

30

A08-GKL-AC-B16

5900280962072

1/60

AC

B

16

30

A08-GKL-AC-B20

5900280962089

1/60

AC

B

20

30

A08-GKL-AC-B25

5900280962096

1/60

AC

B

25

30

A08-GKL-AC-C06

5900280962102

1/60

AC

C

6

30

A08-GKL-AC-C10

5900280962119

1/60

AC

C

10

30

A08-GKL-AC-C16

5900280962126

1/60

AC

C

16

30

A08-GKL-AC-C20

5900280962133

1/60

AC

C

20

30

A08-GKL-AC-C25

5900280962140

1/60

AC

C

25

30