


RESIDUAL CURRENT CIRCUIT BREAKER WITH OVERCURRENT PROTECTION

Schelinger



GVL 10kA (RCBO)

FI/LS-KOMBISCHALTER

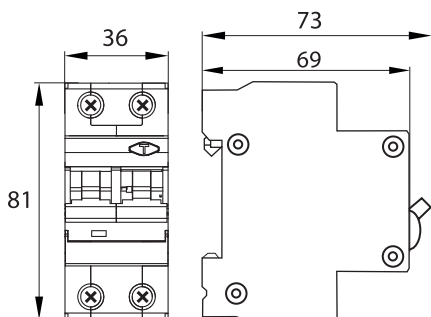

Characteristics:

A



galvanised steel terminals




TEST control button



possibility to connect with comb busbars



terminal capacity 25 mm²

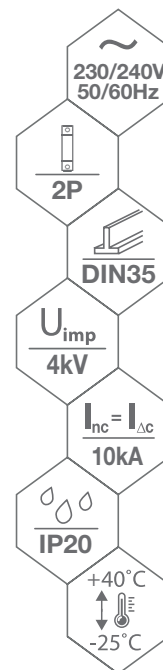

Schelinger					I_n	$I_{\Delta n}$
code	EAN	package	type	characteristics work	rated current [A]	differential current [mA]
A08-GVL-A-B06-10KA	5900280999825	1/6/60	A	B	6	30
A08-GVL-A-B10-10KA	5900280994240	1/6/60	A	B	10	30
A08-GVL-A-B13-10KA	5900280999832	1/6/60	A	B	13	30
A08-GVL-A-B16-10KA	5900280994257	1/6/60	A	B	16	30
A08-GVL-A-B20-10KA	5900280999849	1/6/60	A	B	20	30
A08-GVL-A-B25-10KA	5900280999856	1/6/60	A	B	25	30
A08-GVL-A-B32-10KA	5900280999863	1/6/60	A	B	32	30
A08-GVL-A-C06-10KA	5900280999870	1/6/60	A	C	6	30
A08-GVL-A-C10-10KA	5900280994264	1/6/60	A	C	10	30
A08-GVL-A-C13-10KA	5900280999887	1/6/60	A	C	13	30
A08-GVL-A-C16-10KA	5900280994271	1/6/60	A	C	16	30
A08-GVL-A-C20-10KA	5900280999894	1/6/60	A	C	20	30
A08-GVL-A-C25-10KA	5900280999900	1/6/60	A	C	25	30
A08-GVL-A-C32-10KA	5900280999917	1/6/60	A	C	32	30