




NEW

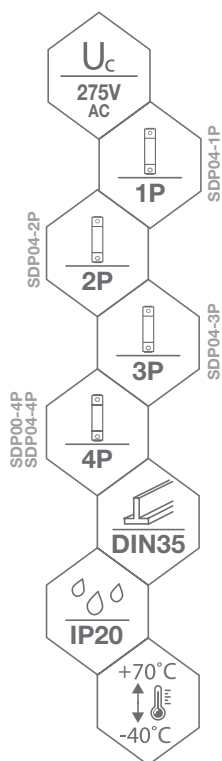


SPD04-4P

MOV
varistor

SPD00-2P

► SPD00-1P


► SPD00-2P

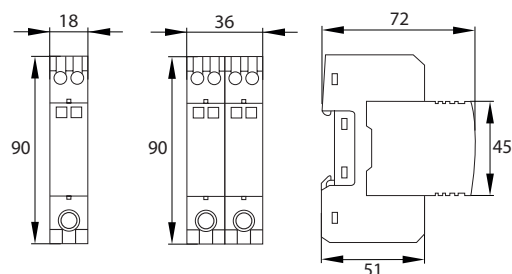

► SPD04-1P

► SPD04-3P

► SPD04-4P

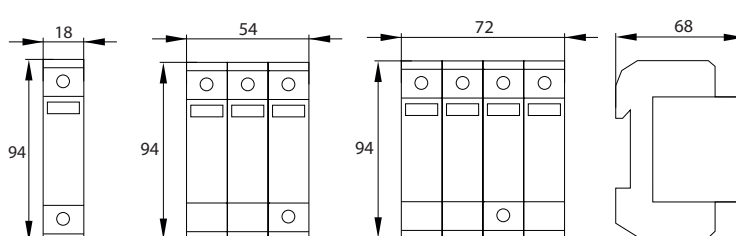galvanised
steel terminalterminal capacity: max.
35 mm²capability to
connect using comb
busbars

replaceable inserts *

green protector status
indicator light – insert in
working order
red – to be replaced

Schelinger				U_p	I_{imp} (10/350 μ s)	I_n (8/20 μ s)	I_{max} (8/20 μ s)
code	EAN	package	class/type	voltage protection level [kV]	inrush current [kA]	rated discharge current [kA]	limit discharge current [kA]
A51-SPD00-2P-C	5902138403287	1/100	C / T2	≤ 1.5	-	40	40
A51-SPD04-4P-C	5902138403294	1/100	C / T2	≤ 1.5	-	40	40
A51-SPD04-1P-B+C	5902138401313	1/100	B+C / T1+T2	≤ 1.5	12.5	30	60
A51-SPD04-3P-B+C	5902138402938	1/48	B+C / T1+T2	≤ 1.5	12.5	30	60
A51-SPD04-4P-B+C	5902138401320	1/36	B+C / T1+T2	≤ 1.5	12.5	30	60