







SPD01-4P




SPD01-1P

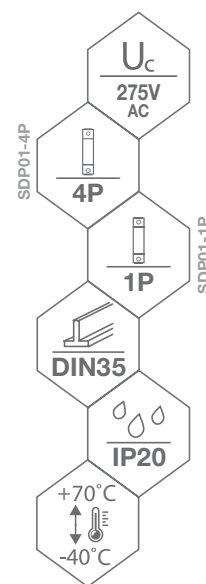

► SPD01-4P



► SPD01-1P



MOV
varistor



galvanised
steel terminal



terminal capacity: max.
35 mm²



capability to
connect using comb
busbars



replaceable inserts *



green protector status
indicator light – insert in
working order
red – to be replaced

Schelinger				U_p	I_{imp} (10/350 μ s)	I_n (8/20 μ s)	I_{max} (8/20 μ s)
code	EAN	package	class/type	voltage protection level [kV]	inrush current [kA]	rated discharge current [kA]	limit discharge current [kA]
A51-SPD01-1P-B+C	5900280916631	1/144	B+C / T1+T2	≤ 1.5	5	20	50
A51-SPD01-4P-B+C	5900280916648	1/36	B+C / T1+T2	≤ 1.5	5	20	50
A51-SPD01-1P-C	5900280964533	1/144	C / T2	≤ 1.5	-	20	40
A51-SPD01-4P-C	5900280964540	1/36	C / T2	≤ 1.5	-	20	40