





SPD-GDT-DC-3P-T2





SPD-GDT-DC-3P-T1T2

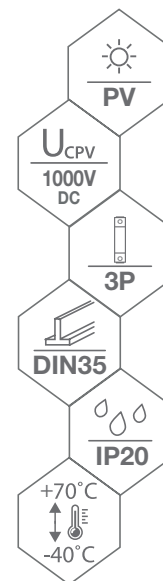

► SPD-GDT-T2

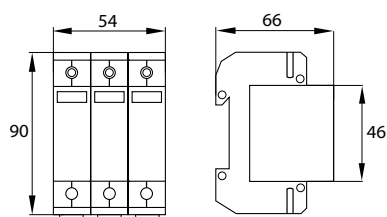

► SPD-GDT-T1T2

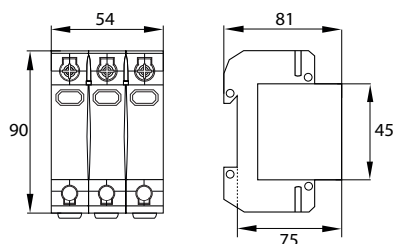

MOV+GDT+MOV
Varistor-spark
gap surge arrester



galvanised steel
terminals



terminal capacity: max.
35 mm²



capability to
connect using comb
busbars



replaceable inserts



green protector status
indicator light – insert in
working order
red – to be replaced

Schelinger				U_p	I_n (8/20 μ s)	I_{max} (8/20 μ s)
code	EAN	package	class/type	voltage protection level [kV]	rated discharge current [kA]	limit discharge current [kA]
A52-SPD-GDT-DC-3P-T2	5900280953520	1/48	C / T2	≤ 4.0	20	40
A52-SPD-GDT-DC-3P-T1T2	5900280953537	1/36	B+C / T1+T2	≤ 4.75	25	50