



NEW



SL03B-MID-MBUS




M-Bus communication protocol (V1.01)



SL03B-MID-RMB




ModBus communication protocol (V1.01)

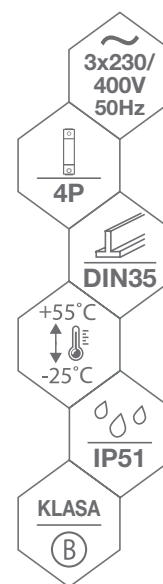


SL03B-MID

SL03B-MID-MBUS / SL03B-MID-RMB

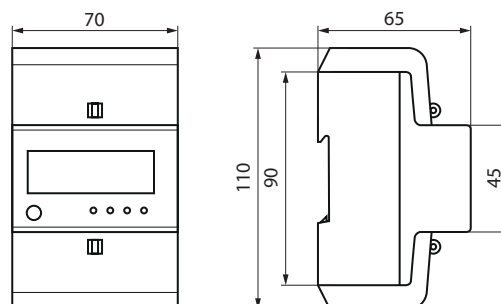


possibility
of sealing



accuracy class (IEC/
MID)



MID certificate T10754



Bidirectional meter
SL03B-MID-MBUS /
SL03B-MID-RMB



clear
LCD display

Schelingner			I_b	I_{max}	I_{min}		
code	EAN	package	base current [A]	maximum current [A]	minimum current [A]	number of digits indications	max. capacity of terminals [mm ²]
A31-SL03B-MID	5900280974624	1/60	5	100	0.25	6 + 2	50
A31-SL03B-MID-RMB	5900280993519	1/60	5	100	0.25	6 + 2	50
A31-SL03B-MID-MBUS	5900280993526	1/60	5	100	0.25	6 + 2	50