




  
230/400V  
50/60Hz


  
1P


  
DIN35


  
U<sub>imp</sub>  
4kV

  
I<sub>cn</sub>  
6000A

  
U<sub>i</sub>  
400V

  
IP20

  
+30°C  
-5°C

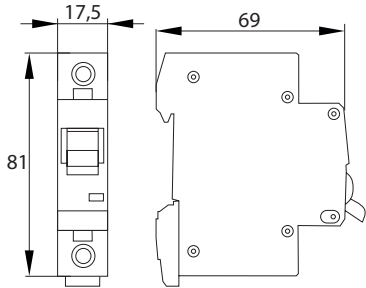

Certificate No. 40057107



terminal capacity:  
max. 25 mm<sup>2</sup>



possibility  
of sealing



capability to connect  
using comb busbars



descriptive box

Schelinger

code

- A02-G8-1P-B02
- A02-G8-1P-B04
- A02-G8-1P-B06
- A02-G8-1P-B10
- A02-G8-1P-B13
- A02-G8-1P-B16
- A02-G8-1P-B20
- A02-G8-1P-B25
- A02-G8-1P-B32
- A02-G8-1P-B40
- A02-G8-1P-B50
- A02-G8-1P-B63
- A02-G8-1P-C02
- A02-G8-1P-C04
- A02-G8-1P-C06
- A02-G8-1P-C10
- A02-G8-1P-C13
- A02-G8-1P-C16
- A02-G8-1P-C20
- A02-G8-1P-C25
- A02-G8-1P-C32
- A02-G8-1P-C40
- A02-G8-1P-C50
- A02-G8-1P-C63



EAN

- 5900280970657
- 5900280970664
- 5900280970671
- 5900280968869
- 5900280995247
- 5900280968852
- 5900280970688
- 5900280970695
- 5900280970701
- 5900280970718
- 5900280970725
- 5900280970732
- 5900280970749
- 5900280970756
- 5900280970763
- 5900280970770
- 5900280995261
- 5900280970787
- 5900280970794
- 5900280970800
- 5900280970817
- 5900280970824
- 5900280970831
- 5900280970848



package

- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120
- 1/12/120



characteristics

- B
- B
- B
- B
- B
- B
- B
- B
- B
- B
- B
- C
- C
- C
- C
- C
- C
- C
- C
- C
- C
- C

I<sub>n</sub>

rated  
current [A]

- 2
- 4
- 6
- 10
- 13
- 16
- 20
- 25
- 32
- 40
- 50
- 63
- 2
- 4
- 6
- 10
- 13
- 16
- 20
- 25
- 32
- 40
- 50
- 63