

~

400V

50/60Hz

3P

DIN35

U_{imp}

4kV

I_{cn}

6000A


U_i

400V

IP20

+30°C

-5°C

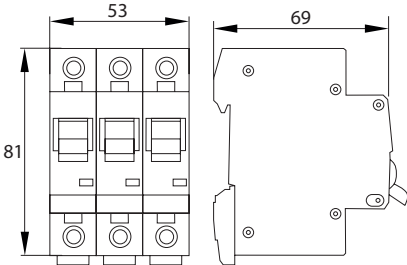

Certificate No. 40057107



terminal capacity:
max. 25 mm²



possibility
of sealing



capability to connect
using comb busbars



descriptive box

Schelinger



I_n

code	EAN	package	characteristics	rated current [A]
A02-G8-3P-B06	5900280970855	1/4/40	B	6
A02-G8-3P-B10	5900280970862	1/4/40	B	10
A02-G8-3P-B13	5900280995254	1/4/40	B	13
A02-G8-3P-B16	5900280970879	1/4/40	B	16
A02-G8-3P-B20	5900280970886	1/4/40	B	20
A02-G8-3P-B25	5900280970893	1/4/40	B	25
A02-G8-3P-B32	5900280970909	1/4/40	B	32
A02-G8-3P-B40	5900280970916	1/4/40	B	40
A02-G8-3P-B50	5900280970923	1/4/40	B	50
A02-G8-3P-B63	5900280970930	1/4/40	B	63
A02-G8-3P-C06	5900280970947	1/4/40	C	6
A02-G8-3P-C10	5900280970954	1/4/40	C	10
A02-G8-3P-C13	5900280995278	1/4/40	C	13
A02-G8-3P-C16	5900280970961	1/4/40	C	16
A02-G8-3P-C20	5900280970978	1/4/40	C	20
A02-G8-3P-C25	5900280970985	1/4/40	C	25
A02-G8-3P-C32	5900280970992	1/4/40	C	32
A02-G8-3P-C40	5900280971005	1/4/40	C	40
A02-G8-3P-C50	5900280971012	1/4/40	C	50
A02-G8-3P-C63	5900280971029	1/4/40	C	63