BEMKO



PRODUCT CATALOG

BEMKO

GET TO KNOW US BETTER



BEMKO Sp. z o.o. is an electrotechnical company with an established position on the market, steadily expanding its presence in the lighting and electrotechnical market in Poland and abroad. Established in **2007**, the company currently distributes its products in Poland and the European Union through an extensive network of wholesalers supported by regional Sales Managers. The company's head office is located in Jawczyce near Warsaw close to the Konotopa motorway junction.

BEMKO's main goal is to provide customers with innovative products that respond to current trends in the lighting market, taking into account technological progress in the industry, while ensuring a balance between quality and energy efficacy.

We enjoy our work and care about the comfort and satisfaction of our customers by offering professional and tailored solutions while providing continuous commercial, technical, marketing, design, and logistic support.





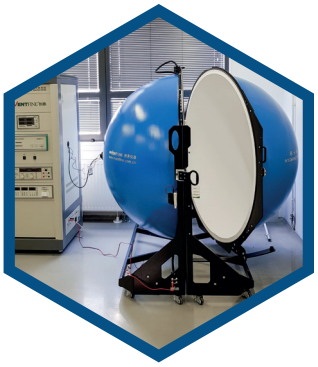



PROFESSIONAL LED LUMINAIRES FOR 24/7 OPERATION!

We focus on the quality and reliability of our products. We are inspired by changes in the lighting market and are actively working in our Research and Development Centre to make a real difference for the better.

To meet your expectations, Bemko implemented new quality standards for its luminaires in 2022. We have made improvements in terms of luminous efficacy and extended daily operating times. Currently, **for all our luminaires** under the Bemko and Luxmena brands, **12 h/day** operation is standard.

Our range was extended with luminaires for which 3-year warranty for continuous **24-hour operation!**
Luminaires of this type include the new **LED-24h Panels, HBP3, HBU3** Highbay, **HLB, HLA3, HLS** hermetic luminaires, and **LFC** floodlights.

The top quality of the components used guarantees reliable operation for many years!

Feel free to take a look at the offer.



Bemko Sp. z o.o. 05-850 Jawczyce, ul. Bocznicowa 13 tel. (022) 732 11 85

RESEARCH AND DEVELOPMENT CENTRE

Research & Development Centre

The high product quality and modern design are the result of an extensive research programme carried out at our **Research and Development Centre.**

The laboratory was established in **2019** and is equipped with high-end measuring instruments (including GPM goniophotometer and Ulbricht spheres) to improve technical solutions and optimise performance of all our luminaires.

Ensuring the highest quality of our products is our priority. The products on offer are characterised by a modern design and high-quality workmanship confirmed by specialised independent testing bodies.

The capabilities of the Research and Development Centre allow us to control the quality of our products in terms of compliance with:

- safety of use requirements,
- Electromagnetic Compatibility (EMC) requirements,
- declared photometric parameters,
- IK impact resistance,
- electrical parameters of power supplies.

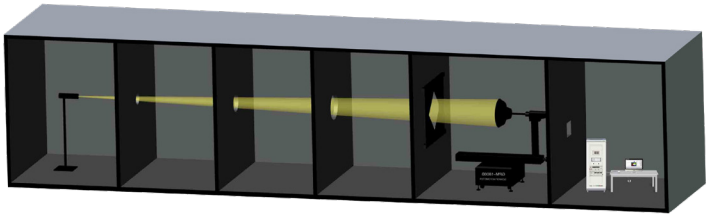

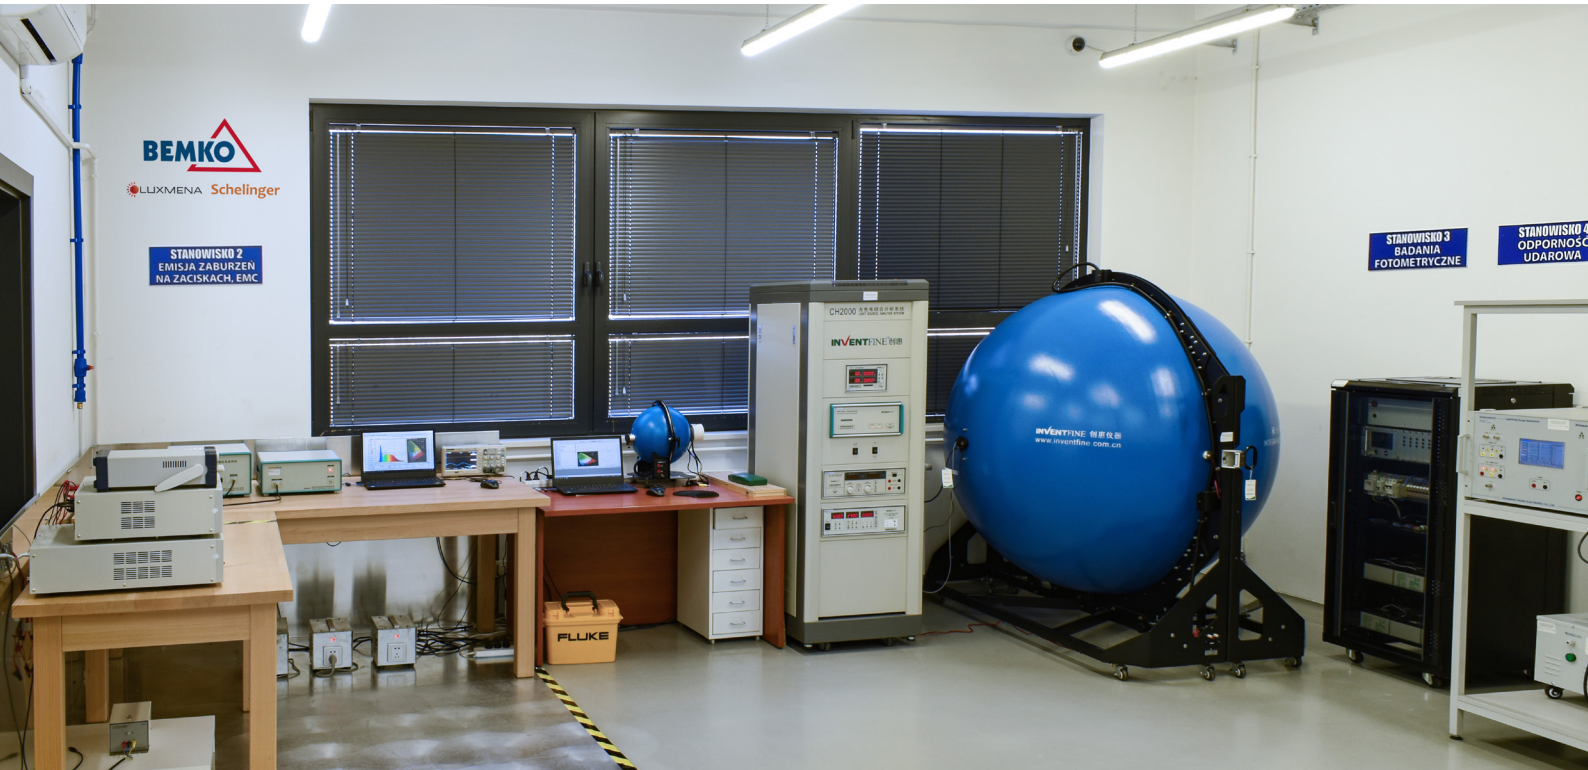

5 LUMINAIRES

6 LED PANEL
16 RASTER LUMINAIRE
17 LED PANEL – ACCESSORIES
18 LED HERMETIC LUMINAIRE
21 LUMINAIRE WITH COVER
22 T8-LED HERMETIC LUMINAIRE
23 T8 LUMINAIRE WITH COVER
24 HERMETIC LUMINAIRE
25 LUMINAIRE WITH COVER
28 LED / E27 CEILING LAMP
44 LED DOWNLIGHT LUMINAIRE
45 LED CEILING LAMP
46 LED DOWNLIGHT LUMINAIRE
51 LED WALL LIGHT
52 LED PENDANT LUMINAIRE
53 LINEAR LUMINAIRE
58 LED SPOTLIGHT LUMINAIRE
64 LED STAIR LUMINAIRE
65 GU10 OVERRUN LUMINAIRE
66 LED FAÇADE LUMINAIRE
68 LED STADIUM LUMINAIRE
69 LED SOLAR FLOODLIGHT
69 LED FLOODLIGHT
77 TRIPOD
78 LED STREET LUMINAIRE
82 LED PARKING LOT LUMINAIRE
83 LED PARK LUMINAIRE
84 FOLDING LIGHT POLE
86 SOLAR LED STREET LUMINAIRE
88 SOLAR LED PARK LUMINAIRE
89 SOLAR LED FLOODLIGHT
92 HIGH-BAY LED LUMINAIRE
98 MULTIFUNCTION LED FLASHLIGHT

101 EMERGENCY LUMINAIRES

102 SURFACE-MOUNTED EMERGENCY LUMINAIRE
104 FLUSH-MOUNTED EMERGENCY LUMINAIRE
106 ESCAPE LUMINAIRE

107 LIGHT SOURCES

108 LED TUBE
110 LIGHT SOURCE – FILAMENT LED INSIDE
114 LIGHT SOURCE – SAMSUNG LED INSIDE
117 LIGHT SOURCE WITH MOTION SENSOR
118 LED STRIP
120 CONNECTOR, DRIVERS, DISTRIBUTOR

121 ACCESSORIES AND COMPONENTS

122 PRESENCE SENSOR
123 MOTION SENSOR
128 PROXIMITY SENSOR
129 TWILIGHT SENSOR
130 PROGRAMMER
132 EXTENSION CABLE
137 POWER STRIP, SOCKET, PLUG
138 REEL EXTENDER
139 POWER SUPPLY
144 QUICK CONNECTOR
146 CABLE GLAND
148 HERMETIC CABLE CONNECTOR
149 JUNCTION BOX
150 THROUGH CONNECTOR
151 SWITCHBOARDS
154 SELF-AMALGAMATING TAPE AND INSULATION TAPE
155 CABLE TIE
156 STARTER, ELECTRONIC BALLAST
156 SOCKET, CERAMIC SOCKET



LUMINAIRES

LEUCHTEN

LED PANEL

BLS BACKLIGHT SUPERIOR

LED-LEUCHTENN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► Aluminiumlegierung, Kunststoff

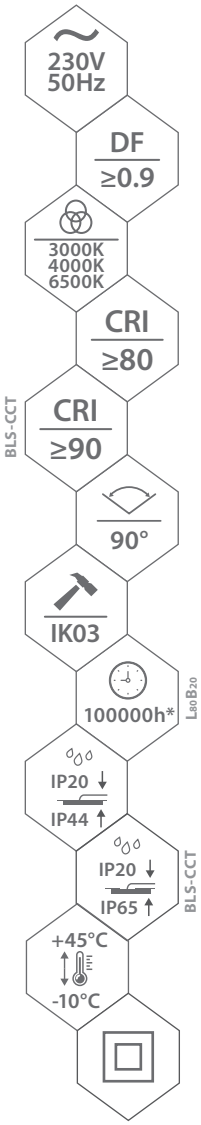



BLS-066

BLS-123

TÜVRheinland CERTIFIED
www.tuv.com
ID 1111248097

GS geprüfte Sicherheit

L80B10
100000h*

UGR < 19

150lm/W

WARRANTY 5 YEARS
12h

CCT- possibility to select the colour temperature

▶ BLS-066



▶ BLS-123

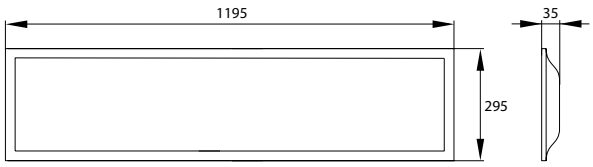



AGT power supply included



quick-connect power supply for easy installation



new versions and higher luminous efficacy – 150 lm/W



compatible with an emergency lighting module



certificate of the National Institute of Hygiene

LUXMENA code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C72-BLS-066-200-4K-WH-U19	5900280987341	1/6	4000	20	3000
C72-BLS-123-200-4K-WH-U19	5900280987358	1/6	4000	20	3000
C72-BLS-066-260-4K-WH-U19	5900280987365	1/6	4000	26	4000
C72-BLS-123-260-4K-WH-U19	5900280987372	1/6	4000	26	4000
C72-BLS-066-340-4K-WH-U19	5900280987389	1/6	4000	34	5000
C72-BLS-123-340-4K-WH-U19	5900280987396	1/6	4000	34	5000
C72-BLS-066-410-4K-WH-U19	5900280987402	1/6	4000	41	6000
C72-BLS-123-410-4K-WH-U19	5900280987419	1/6	4000	41	6000
C72-BLS-066-420-CCT-WH	5900280997210	1/6	3000 / 4000 / 6500	30 / 36 / 42	4310/5100/5620

*Durability data updated based on the latest LM-80 reports.

LED PANEL

LED-LEUCHTENN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► Aluminiumlegierung, Kunststoff

BLM BACKLIGHT MINTAL

NEW

www.tuv.com
ID 1111248097

L80B10
100000h*

UGR < 19

120lm/W

5 YEARS WARRANTY
12h

CCT- possibility to select the colour temperature



BLM-066



BLM-123

~ 230V 50Hz
DF ≥0.9
3000K 4000K 6500K
CRI ≥80
120°
90°
U19
100000h*
L70B50
IK03
+45°C -10°C
IP40
IP65

► BLM-066

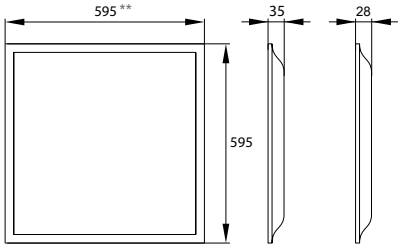

**620 mm for C72-BLM-062 model

► BLM-123

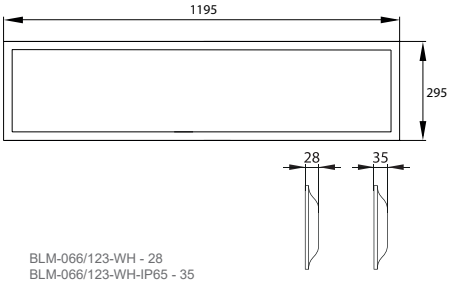

BLM-066/123-WH - 28
BLM-066/123-WH-IP65 - 35
BLM-CCT - 35



AGT power supply included



BOKE power supply in IP65 versions



new versions and higher luminous efficacy – 120 lm/W



quick-connect power supply for easy installation

CNBOP-PIB

compatible with an emergency lighting module

INSTYTUT ZDROWIA PUBLICZNEGO · NARODOWY · PIB · PZH · PRODUKT Z ATESTEM

certificate of the National Institute of Hygiene



optional SKY cover

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C72-BLM-123-340-3K-WH	5900280987556	1/10	3000	34	4000
C72-BLM-123-340-4K-WH	5900280987518	1/10	4000	34	4000
C72-BLM-123-340-6K-WH	5900280987570	1/10	6500	34	4000
C72-BLM-123-340-4K-WH-U19	5900280987532	1/10	4000	34	4000
C72-BLM-123-340-4K-WH-IP65	5900280987594	1/6	4000	34	4000
C72-BLM-066-340-3K-WH	5900280987549	1/10	3000	34	4000
C72-BLM-066-340-4K-WH	5900280987501	1/10	4000	34	4000
C72-BLM-066-340-6K-WH	5900280987563	1/10	6500	34	4000
C72-BLM-066-340-4K-WH-U19-IP65	5900280987587	1/6	4000	34	4000
C72-BLM-066-340-3K-WH-U19	5900280994141	1/10	3000	34	4000
C72-BLM-066-340-4K-WH-U19	5900280987525	1/10	4000	34	4000
C72-BLM-066-420-CCT-WH	5900280993342	1/6	3000 / 4000 / 6500	30 / 36 / 42	3800 / 4320 / 5000
C72-BLM-062-420-CCT-WH	5900280997197	1/6	3000 / 4000 / 6500	30 / 36 / 42	3800 / 4320 / 5000

*Durability data updated based on the latest LM-80 reports.

LED PANEL

BLG GRANDER

LED-LEUCHTENN

MATERIAL ► plastic, steel
MATERIAL ► Kunststoff, tahl

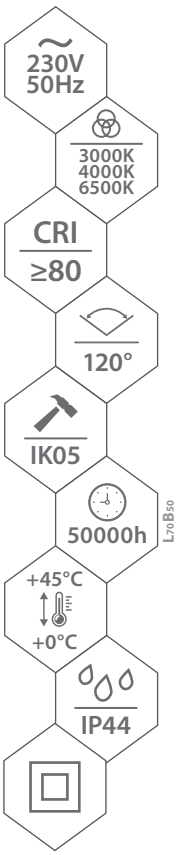

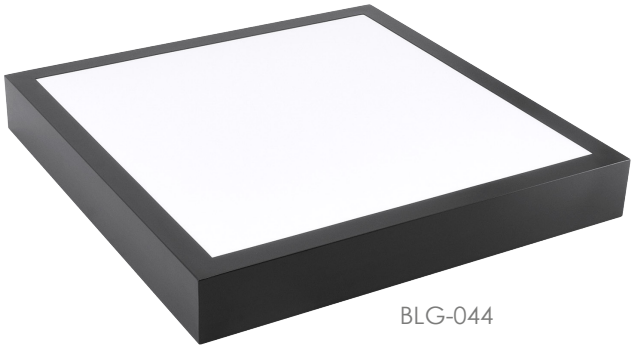

BLG-044

L70B50
50000h

5 YEARS WARRANTY

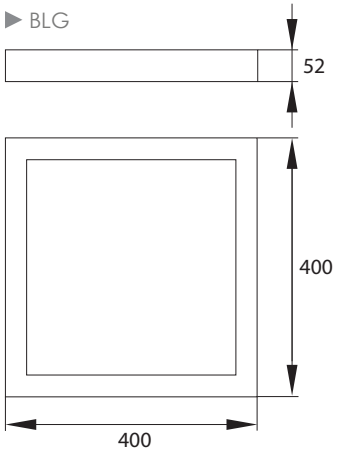



BLG-044



CCT- possibility to select the colour temperature



easy luminaire installation



enclosure can be made in any RAL colour



safety cord included



switch to change the colour tempera-ture or power

LUXMENA code	P_{ON} power [W]	colour temperature [K]	luminous flux [lm]	dimensions [mm]
C72-BLG - 044-30B-CCT-90xxA	26	3000	2990	400x400x52
		4000	2990	
		6000	2990	
	30	3000	3750	400x400x52
		4000	3750	
		6000	3750	
	34	3000	4250	400x400x52
		4000	4250	
		6000	4250	

LED PANEL

LED-LEUCHTENN

MATERIAL ► aluminium alloy, PMMA
MATERIAL ► aluminiumlegierung, schirm: PMMA

BLD DENAR

L70B50 50000h

WARRANTY 5 YEARS 12h



BLD-044

230V 50Hz
DF ≥0.9
4000K
CRI ≥80
120°
IK05
L70B50 50000h
+45°C -20°C
IP20 IP44

▶ BLD



Standard enclosure colours: white, silver, graphite grey, black





enclosure can be made in any RAL colour



AGT power supply included



versions with passive infrared sensor (PIR)

CNBOP-PIB

compatible with an emergency lighting module

NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO · PZH · PIB · PRODUKT Z ATESTEM

certificate of the National Institute of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C72-BLD-044-320-4K-WH	5900280951588	1/10	4000	32	3500	E
C72-BLD-044-320-4K-BL	5900280956972	1/10	4000	32	3500	E
C72-BLD-044-320-4K-GR	5900280956989	1/10	4000	32	3500	E
C72-BLD-044-320-4K-SL	5900280956996	1/10	4000	32	3500	E
C72-BLD-044-320-4K-WH-PIR	5900280957030	1/10	4000	32	3500	E
C72-BLD-044-320-4K-BL-PIR	5900280957009	1/10	4000	32	3500	E
C72-BLD-044-320-4K-GR-PIR	5900280957016	1/10	4000	32	3500	E
C72-BLD-044-320-4K-SL-PIR	5900280957023	1/10	4000	32	3500	E

BLA BACKLIGHT

LED-LEUCHTENN

MATERIAL ▶ plastic, steel
MATERIAL ▶ Kunststoff, tahl

NEW

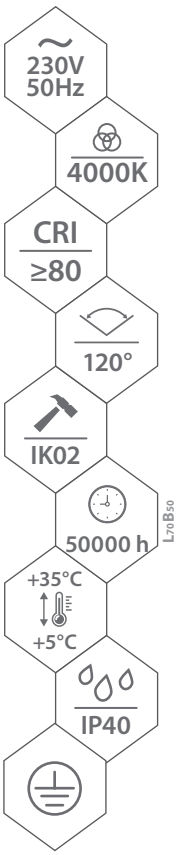

L70B50
50000h

2 YEARS WARRANTY



BLA-066

▶ BLA-066

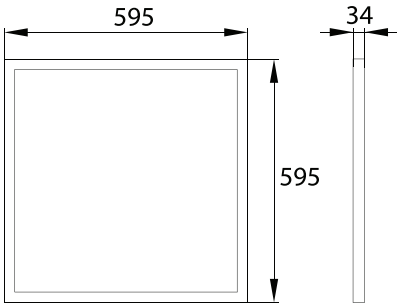



easy installation



power supply units integrated in the enclosure



surface mounting or for Armstrong modular ceiling

CNBOP-PIB

compatible with an emergency lighting module

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C72-BLA-066-340-4K-WH	5900280989314	10	4000	34	4000	E

LED PANEL

LED-LEUCHTENN

MATERIAL ► steel, cover: plastic
MATERIAL ► stahl, schirm: kunststoff

BLK BACKLIGHT

L70B50 50000h

2 YEARS WARRANTY



BLK-066



BLK-123

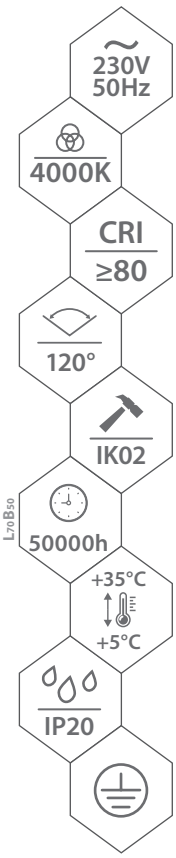

► BLK-066



► BLK-123

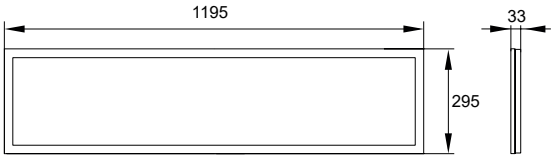

RAL
Full range
of enclosure colours
Full colour palette



white enclosure
with opal diffuser



LED light source



mounting brackets

CNBOP-PIB

compatible with
an emergency
lighting module

NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO · PIB · PRODUKT Z ATESTEM

certificate of the
National Institute
of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C72-BLK-066-400-4K-WH	5900280931726	1/6	4000	40	4000
C72-BLK-123-400-4K-WH	5900280931740	1/6	4000	40	4000

BLF BACKLIGHT

LED-LEUCHTENN

MATERIAL ▶ steel, cover: plastic
MATERIAL ▶ stahl, schirm: kunststoff

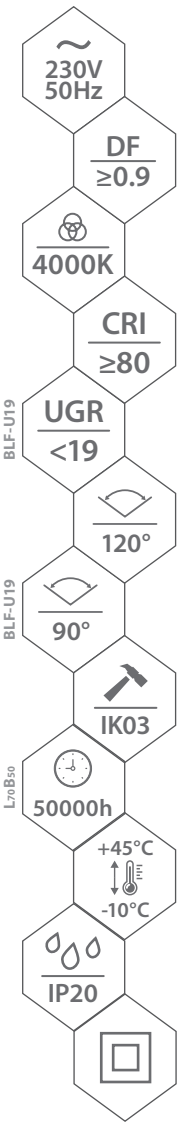



BLF-066



BLF-123

L70B50 50000h

5 YEARS WARRANTY

▶ BLF-066



▶ BLF-123

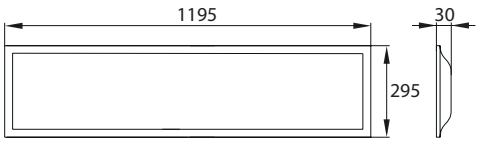

RAL
Full range
of enclosure colours
Full colour palette



optional SKY cover



white enclosure
with opal diffuser



Lifud isolated
power supply



surface-mount-
ed option

CNBOP-PIB

compatible with
an emergency
lighting module



dedicated mounting frames
for surface mounting of C71-
RNT066/123-WH-EC02 series

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	EEI energy class
C72-BLF-066-360-4K-WH	5900280978042	1/10	4000	36	4320	E
C72-BLF-123-360-4K-WH	5900280978059	1/	4000	36	4320	E
C72-BLF-123-400-4K-WH	5900280989925	1/10	4000	40	4400	E
C72-BLF-066-360-4K-WH-U19	5900280999016	1/10	4000	36	4320	E
C72-BLF-123-360-4K-WH-U19	5900280999023	1/10	4000	36	4320	E

LED FRAME

LED-LEUCHTENN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► aluminiumlegierung, kunststof

BEMKO

FLP PLAZA

L70B50 50000h

WARRANTY 5 YEARS* 12h



FLP-066

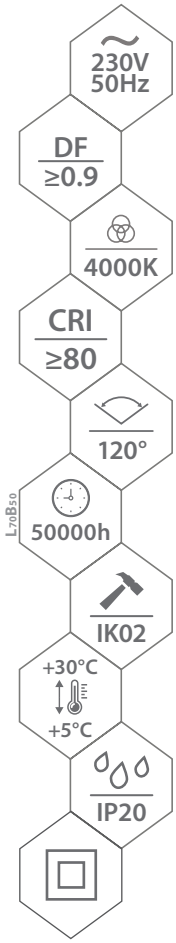

► FLP-066

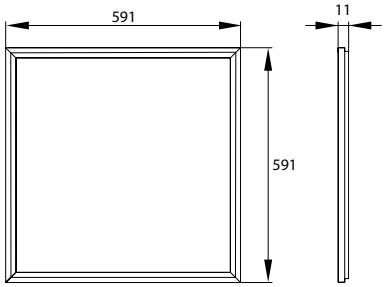



power supply included



quick-connect power supply for easy installation



white frame



flicker-free operation

BEMKO	EAN			P_{ON}		EEI
code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C73-FLP-066-400-4K-WH	5900280926845	1/10	4000	40	4000	E

* Subject to specific warranty conditions

LED PANEL

PLN NEMO

LED-LEUCHTENN

MATERIAL ► aluminium alloy, PMMA
MATERIAL ► aluminiumlegierung, schirm: PMMA

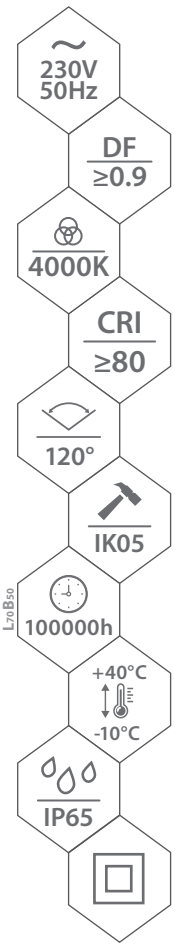



PLN-123



PLN-066









► PLN-066

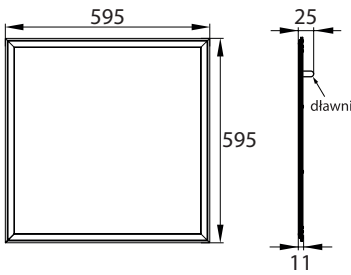

► PLN-123

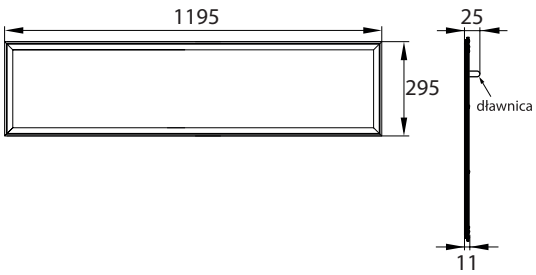



high watertightness



white enclosure
with glossy diffuser



reliable BOKE power
supply for long and
trouble-free operation



IP65 hermetic connector

compatible with
an emergency
lighting module

certificate of the
National Institute
of Hygiene

LUXMENA code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C71-PLN-066-400-4K-IP65	5900280953599	1/5	4000	40	4400	E
C71-PLN-123-400-4K-IP65	5900280953803	1/5	4000	40	4400	E

LED PANEL

LED-LEUCHTENN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► aluminiumlegierung, kunststof

PLM MIDAL



PLM-066



PLM-123



► PLM-066



► PLM-123

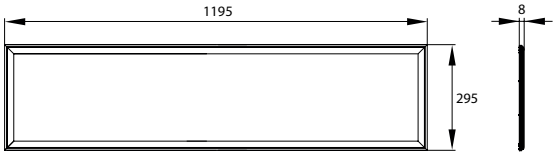

RAL
Full range
of enclosure colours
Full colour palette



opal diffuser



panel in RAL9016 colour



power supply included



quick-connect
power supply for
easy installation

compatible with
an emergency
lighting module

certificate of the
National Institute
of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C71-PLM-066-400-4K-WH	5900280923448	1/5	4000	40	4100	E
C71-PLM-123-400-4K-WH	5900280926524	1/5	4000	40	4100	E

* Subject to specific warranty conditions

T8-LED RASTER LUMINAIRE

E-RES KAFLER

SURFACE-MOUNTED LOUVRE LUMINAIRE
RASTERLEUCHTEN T8 ELEKTRONIK

MATERIAL ► aluminium, steel
MATERIAL ► aluminium, stahl

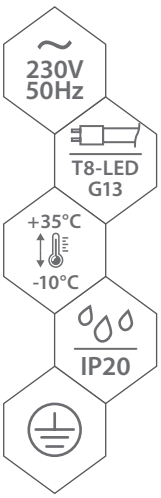



E-RES236N



E-RES418N

▶ E-RES418N



▶ E-RES236N

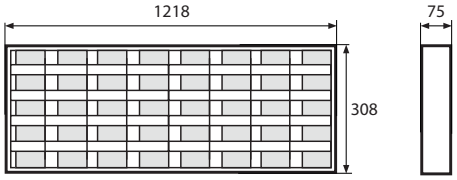



single-sided power supply



connection terminal



T8 G13 socket



reflector catch



compatible with an emergency lighting module



embossing on the enclosure

KAFLER	EAN		P
code	EAN	package	maximum power of the source [W] *
C05-E-RES418N	5900280911698	1/2/36	4x18 W
C05-E-RES236N	5900280933287	1/2/40	2x36 W

*No light source included

LED PANEL – ACCESSORIES

LED-PANEL - ZUBEHÖR

Screwless frame – fast installation
RNT066-ECO / RNT123-ECO

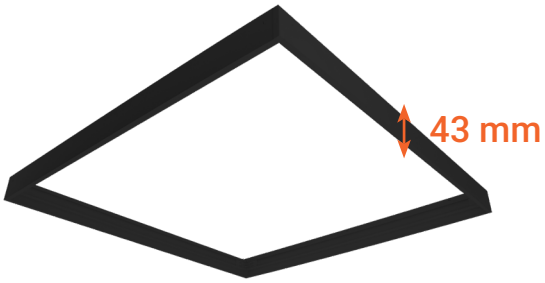

Screwless frame – fast installation
RNT066-ECO2 / RNT123-ECO2



Cords for installation in suspended systems
U-NTL

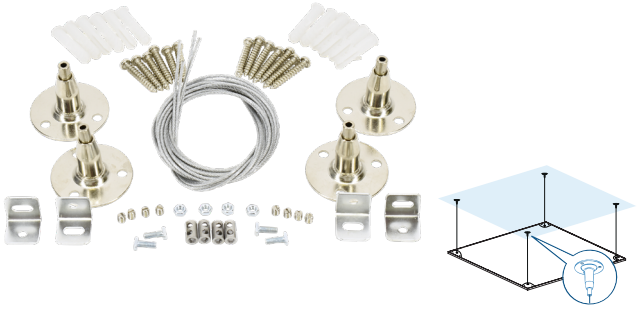

Cords dedicated to PLY panels
PLY-NTL

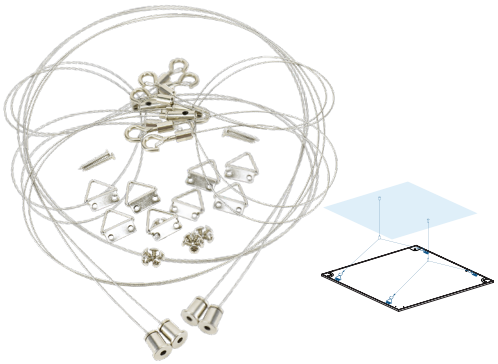

Brackets for drywall installation
PLZ-PTGK

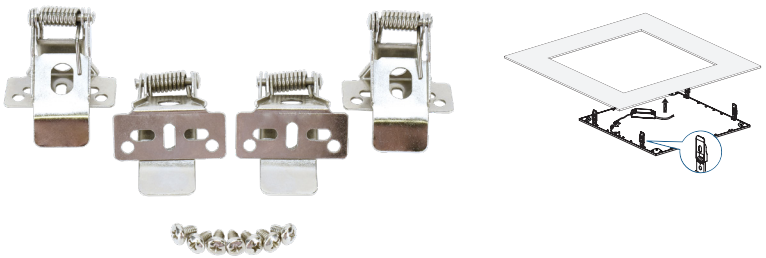

Brackets dedicated to PLY panels
PLY-PTGK



BEMKO code	EAN	description	dimensions [mm]	compatible luminaires
C79-RNT066-WH-ECO	5900280923967	SURFACE-MOUNTED MOUNTING FRAME FOR PANELS WHITE ECO	600x600x43	BLS / BLM / BLF / PLN / PLM
C79-RNT123-WH-ECO	5900280931023	SURFACE-MOUNTED MOUNTING FRAME FOR PANELS WHITE ECO	300x1200x43	BLS / BLM / BLF / PLN / PLM
C79-RNT066-BL-ECO	5900280955852	SURFACE-MOUNTED MOUNTING FRAME FOR PANELS BLACK ECO	600x600x43	BLS / BLM / BLF / PLN / PLM
C79-RNT123-BL-ECO	5900280987754	SURFACE-MOUNTED MOUNTING FRAME FOR PANELS BLACK ECO	300x1200x43	BLS / BLM / BLF / PLN / PLM
C79-RNT066-WH-ECO2	5900280973481	MOUNTING FRAME FOR LED PANEL 60x60 WHITE ECO HEIGHT 68MM	600x600x68	BLS / BLM / BLF / PLN / PLM
C79-RNT123-WH-ECO2	5900280973498	MOUNTING FRAME FOR LED PANEL 120x30 WHITE ECO HEIGHT 68MM	300x1200x68	BLS / BLM / BLF / PLN / PLM

code	EAN	description	dimensions	compatible luminaires
C79-U-NTL-100	5900280923462	SURFACE-MOUNTED MOUNTING KIT FOR LED PANELS – 2x CORD	2x cable 100 cm	BLM / BLS / BLK / PLM / PLN
S-C79-PLZ-PTGK	5900280913050	FLUSH-MOUNTED KIT FOR LED PANELS FOR PLASTERBOARD – 4x BRACKET	-	BLS / BLM / BLF / PLN / PLM

HERMETIC LED LUMINAIRE

HLC3 ARKOS

LED FEUCHTRAUMWANNENLEUCHTEN

MATERIAL ► enclosure: PC, cover: PC or PMMA
MATERIAL ► gehäuse: PC, schirm: PC oder PMMA

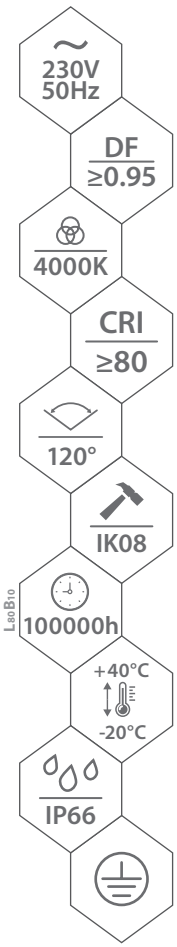



HLC3-120A





180lm/W



	a [mm]	b [mm]
120A	1185	700±78





hermetic cable gland



high-quality LED modules



possibility of installing a microwave motion sensor



C17-HLC-ZZT hooks for installation in suspended systems



certificate of the National Institute of Hygiene (PZH)

LUXMENA code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	material of the cover
C17-HLC3-120A-35B-840B-1B	5900280973528	1	4000	35	5,850	PC
C17-HLC3-120A-40B-840B-1B	5900280974204	1	4000	40	6,600	PC
C17-HLC3-120A-50B-840B-1B	5900280973542	1	4000	50	8,250	PC
C17-HLC3-120A-60B-840B-1B	5900280974211	1	4000	60	9,900	PC
C17-HLC3-120A-70B-840B-1B	5900280974228	1	4000	70	11,250	PC
C17-HLC3-120A-80B-840B-1B	5900280974235	1	4000	80	12,600	PC
C17-HLC3-120A-35B-840B-2B	5900280974242	1	4000	35	6,300	PMMA
C17-HLC3-120A-40B-840B-2B	5900280974259	1	4000	40	7,200	PMMA
C17-HLC3-120A-50B-840B-2B	5900280974266	1	4000	50	9,000	PMMA
C17-HLC3-120A-60B-840B-2B	5900280974273	1	4000	60	10,500	PMMA
C17-HLC3-120A-70B-840B-2B	5900280974280	1	4000	70	11,900	PMMA
C17-HLC3-120A-80B-840B-2B	5900280974297	1	4000	80	13,250	PMMA

The warranty depends on operating conditions | up to 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

HERMETIC LED LUMINAIRE

LED FEUCHTRAUMWANNENLEUCHTEN

HLA3 ALWIR

MATERIAL ► enclosure: PC, cover: PC
MATERIAL ► gehäuse: PC, schirm: PC



HLA3-120



HLA3-150



HLA3-060

170lm/W

230V 50Hz
DF ≥0.95
4000K
CRI ≥80
120°
IK08
L80B10 70000h
+40°C -20°C
IP66

HLA3-060



HLA3-120



HLA3-150



HLA3-060-160-4K power regulation from **16W to 9W,** luminous flux from **2700lm to 1535lm**
HLA3-120-350-4K power regulation from **35W to 19W,** luminous flux from **6000lm to 3252lm**
HLA3-150-460-4K power regulation from **46W to 38W,** luminous flux from **7800lm to 6579lm**
HLA3-150-700-4K power regulation from **70W to 60W,** luminous flux from **11550lm to 10203lm**

The fixture will be controlled within a range of +/- 10%.
We do not recommend using the above default power supply values.



milky cover and gland IP66



high-quality LED modules



possibility of installing a microwave motion and twilight sensor



isolated power supply



DIP Switch

CNBOP-PIB

compatible with an emergency lighting module

PRODUKT Z ATESTEM

certificate of the National Institute of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	stainless steel mounting clips
C17-HLA3-060-160-4K	5900280982599	1/8	4000	16	2700	8pcs
C17-HLA3-120-350-4K	5900280982605	1/8	4000	35	6000	12 pcs
C17-HLA3-150-460-4K	5900280982612	1/8	4000	46	7800	14pcs
C17-HLA3-150-700-4K	5900280992376	1/8	4000	70	11550	14pcs
C17-HLA3-MD	5900280982650	1/125	MICROWAVE MOTION AND TWILIGHT SENSOR			

The warranty depends on operating conditions | up to 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

HLB BALWIR

LED FEUCHTRAUMWANNENLEUCHTEN

MATERIAL ► enclosure: PC, cover: PC
MATERIAL ► gehäuse: PC, schirm: PC

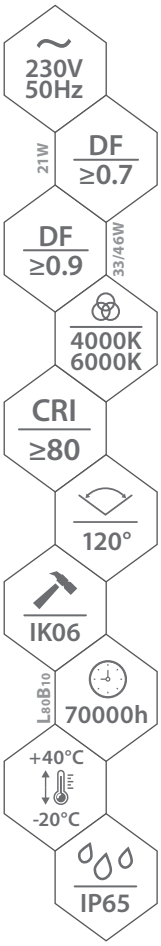



HLB-060



HLB-120

150lm/W

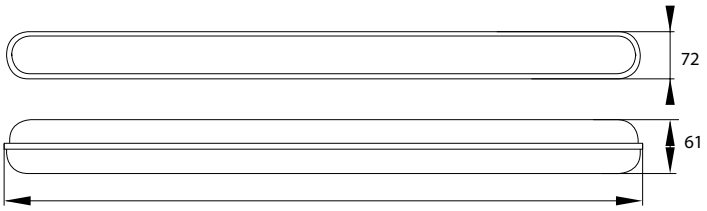

HLB-060: 590
HLB-120: 1180
HLB-150: 1480



IP65 gland



efficient LED light sources



frosted cover



isolated power supply

compatible with an emergency lighting module

certificate of the National Institute of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C17-HLB-060-210-4K	5900280939760	1/20	4000	21	3150
C17-HLB-060-210-6K	5900280939791	1/20	6000	21	3150
C17-HLB-120-330-4K	5900280987853	1/12	4000	33	4950
C17-HLB-120-330-6K	5900280987860	1/12	6000	33	4950
C17-HLB-150-460-4K	5900280987877	1/12	4000	46	6900
C17-HLB-150-460-6K	5900280987884	1/12	6000	46	6900

The warranty depends on operating conditions | up to 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

HERMETIC LED LUMINAIRE

LED FEUCHTRAUMWANNENLEUCHTEN

MATERIAL ► enclosure: PC, cover: PC
MATERIAL ► gehäuse: PC, schirm: PC

HLS SOLIS

5 YEARS WARRANTY *

140lm/W



HLS-060



HLS-120

~ 230V 50Hz
DF ≥0.9
4000K
CRI ≥80
120°
IK08
L70B50 50000h
+40°C -20°C
IP65



HLS-060: 600
HLS-120: 1200
HLS-150: 1500



HLS-060: 70
HLS-120: 70
HLS-150: 80



IP65 gland



isolated power supply



mounting bracket



hermetic connection chamber



connection chamber, possibility of through-feed

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C17-HLS-060-180-4K	5900280942821	1/16	4000	18	2520
C17-HLS-120-360-4K	5900280942838	1/16	4000	36	5040
C17-HLS-150-480-4K	5900280942845	1/12	4000	48	6720

* Subject to specific warranty conditions

T8-LED HERMETIC LUMINAIRE

OHT

T8-LED FEUCHTRAUMWANNENLEUCHTEN

MATERIAL ▶ enclosure: ABS, cover: PS, PC – polycarbonate
MATERIAL ▶ gehäuse: ABS, schirm: PS, PC - Polycarbonat

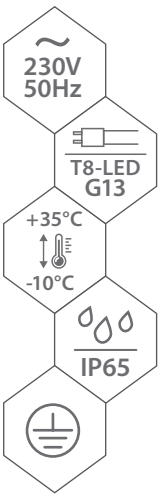







▶ 1KP 1xT8 LED

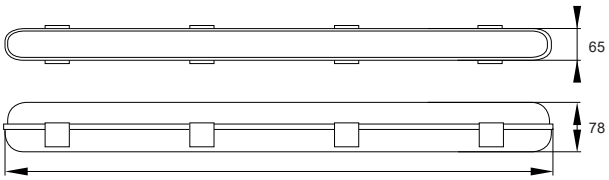

OHT-060-1KP: 660
OHT-120-1KP: 1260
OHT-150-1KP: 1560

▶ 2KP 2xT8 LED



OHT-060-2KP: 660
OHT-120-2KP: 1260
OHT-150-2KP: 1560


IP65 gland


PC clips as standard


quick connector as standard


easy installation of G13 socket for T8 sources*


cable with a catch for the reflector


mounting catch


C19-U-SSCLIP-STAL4
optional metal clips

BEMKO code	EAN	package	dedicated light source	installation clips
C11-OHT-060-1KP	5900280972064	1/15	1x T8-LED 60 cm	6 pcs
C11-OHT-060-2KP	5900280972071	1/10	2x T8-LED 60 cm	6 pcs
C11-OHT-120-1KP	5900280972088	1/15	1x T8-LED 120 cm	10 pcs
C11-OHT-120-2KP	5900280972095	1/10	2x T8-LED 120 cm	10 pcs
C11-OHT-150-1KP	5900280972101	1/15	1x T8-LED 150 cm	12 pcs
C11-OHT-150-2KP	5900280972118	1/10	2x T8-LED 150 cm	12 pcs

* No light source included

T8-LED LUMINAIRE WITH COVER

BEMKO

E-XP7

T8-LED LEUCHTEN

MATERIAL ► steel, cover: PC
MATERIAL ► stahl, schirm: PC

5 YEARS WARRANTY *

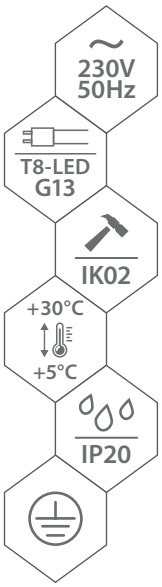



E-XP7218KM



E-XP7218KP

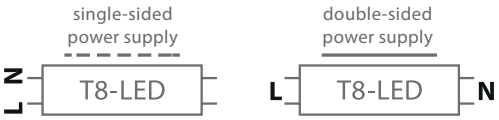

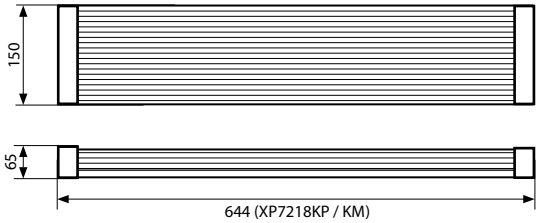



two types of cover:
milky, prismatic



G13 sockets for T8 sources*

CNBOP-PIB

compatible with
an emergency
lighting module

BEMKO code	EAN	package	dedicated light source
C184-E-XP7 218KM-PC	5900280912251	1/8	2x T8-LED 60 cm
C184-E-XP7 218KP-PC	5900280912312	1/8	2x T8-LED 60 cm
C184-E-XP7 236KM-PC	5900280912268	1/4	2x T8-LED 120 cm
C184-E-XP7 236KP-PC	5900280913890	1/4	2x T8-LED 120 cm

* No light source included

HERMETIC LUMINAIRE

HLR

HERMETISCHE LED-LEUCHTE

MATERIAL ► enclosure: ABS, cover: PC – polycarbonate
MATERIAL ► gehäuse: ABS, schirm: PC – Polycarbonat



NEW







HLR-060



HLR-120



HLR-150

HLR-LCW



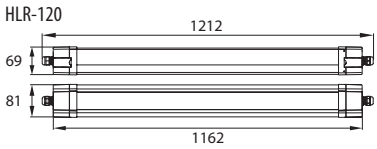

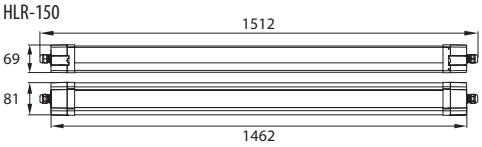



isolated power supply



feed-through system



efficient LED light source



possibility of combining the luminaires into a line with a HLR-LCW connector



quick installation with a quick connector

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C16-HLR-060-180-4K	5902138400422	1/30	4000	18	2790
C16-HLR-120-360-4K	5902138400439	1/30	4000	36	5580
C16-HLR-150-700-4K	5902138400446	1/30	4000	70	10150
C16-HLR-LCW	5902138400453	CONNECTOR FOR HLR HERMETIC LUMINAIRE WHITE			

LED DIFFUSER FIXTURE

LED LEUCHTEN

MATERIAL ► aluminium, end caps and cover: PC

MATERIAL ► Aluminium, Endkappen und Abdeckung: PC

OXN OXAN



OXN

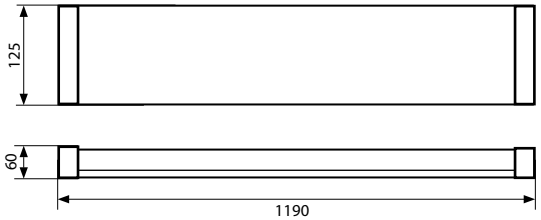



milky cover to diffuse light



polycarbonate end caps and cover

compatible with an emergency lighting module



power supply connection with a quick connector included in the set

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C18-OXN-120A-23B-843B	5900280951250	1/10	4000	23	3250
C18-OXN-120A-32B-843B	5900280948991	1/10	4000	32	4550
C18-OXN-120A-37B-843B	5900280950666	1/10	4000	37	5200
C18-OXN-120A-46B-843B	5900280951205	1/10	4000	46	6400

LED DIFFUSER FIXTURE

OXB

LED LEUCHTEN OXB

MATERIAL ► plastic
MATERIAL ► kunststof

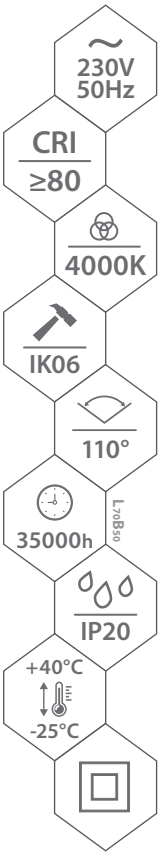

5 YEARS WARRANTY



OXB-060



OXB-120

OXB-060



OXB-120





milky cover to diffuse light



mounting brackets



power supply connection with a quick connector included in the set



isolated power supply

CNBOP-PIB

compatible with an emergency lighting module

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	enclosure dimension [mm]
C18-OXB-060-180-4K	5900280989437	1/40	4000	18	2160	1195x114x40.5
C18-OXB-120-360-4K	5900280989451	1/20	4000	36	4320	595x114x40.5

LED DIFFUSER FIXTURE

KAFLER BEMKO

LED LEUCHTEN

OXA

MATERIAL ► PC

MATERIAL ► PC

NEW

2 YEARS WARRANTY

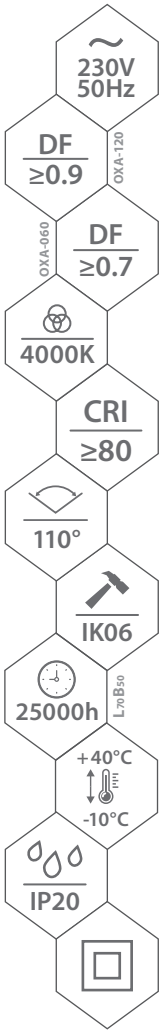



OXA-060



OXA-120

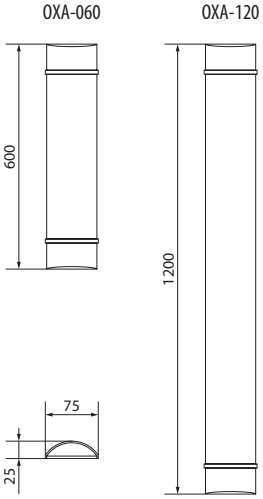



end cap



power supply connection with a quick connector included in the set



mounting brackets

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	enclosure length [mm]
C18-OXA-060-180-4K	5902138400736	1/40	4000	18	1,800	600
C18-OXA-120-360-4K	5902138400743	1/40	4000	36	3,600	1200

LED CCT CEILING LAMP

PLC CELIA

LED DECKENLEUCHTEN

MATERIAL ► PC, frame: powder-coated steel
MATERIAL ► PC, rahmen: Pulverbeschichteter Stahl





PLC-290-200-CCT + PLC-290-HBL

NEW

5 YEARS WARRANTY

DALI *



PLC-290-200-CCT

PLC-360-300-CCT

► PLC-290



► PLC-360

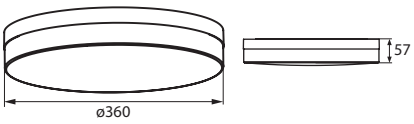

CCT- possibility to select the colour temperature



optional microwave motion and twilight sensor with a dimming function



option to change power and colour temperature

optional version with DALI power supply



isolated power supply system



enclosure can be made in any RAL colour

LUXMENA code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C35-PLC-290-200-CCT	5900280990136	1/8	3000 / 4000	10-20	2300	no
C35-PLC-290-200-CCT-MD	5900280990150	1/8	3000 / 4000	10-20	2300	microwave sensor with dimming function
C35-PLC-360-300-CCT	5900280990143	1/8	3000 / 4000	15-30	3300	no
C35-PLC-360-300-CCT-MD	5900280990167	1/8	3000 / 4000	15-30	3300	microwave sensor with dimming function

P52 ZAS. ER FLS-30-700 DALI-2 LD PRO

EAGLERISE DALI 30 W 150-700 mA COMPACT POWER SUPPLY

LED CCT CEILING LAMP – ACCESSORIES

LED CCT DECKENLEUCHTEN – ZUBEHÖR

PLC frames

low
37 mm

high
72 mm





Available enclosure colours: white, black.

Dedicated suspended-mounting accessories



Microwave motion and twilight sensor with a dimming function



Rod with a base of 4 cm and a length of 60 cm



*Available accessory colours: white, black.

code	EAN	description	dimen-sions [mm]	compatible luminaires
C35-PLC-290-LWH	5900280990198	PLC FRAME 290 MM LOW WHITE	ø292x37	C35-PLC-290-200-CCT / C35-PLC-290-200-CCT-MD
C35-PLC-290-LBL	5900280990174	PLC FRAME 290 MM LOW BLACK	ø292x37	C35-PLC-290-200-CCT / C35-PLC-290-200-CCT-MD
C35-PLC-290-HWH	5900280990235	PLC FRAME 290 MM HIGH WHITE	ø292x72	C35-PLC-290-200-CCT / C35-PLC-290-200-CCT-MD
C35-PLC-290-HBL	5900280990211	PLC FRAME 290 MM HIGH BLACK	ø292x72	C35-PLC-290-200-CCT / C35-PLC-290-200-CCT-MD
C35-PLC-360-LWH	5900280990204	PLC FRAME 360 MM LOW WHITE	ø364x37	C35-PLC-360-300-CCT / C35-PLC-360-300-CCT-MD
C35-PLC-360-LBL	5900280990181	PLC FRAME 360 MM LOW BLACK	ø364x37	C35-PLC-360-300-CCT / C35-PLC-360-300-CCT-MD
C35-PLC-360-HWH	5900280990242	PLC FRAME 360 MM HIGH WHITE	ø364x72	C35-PLC-360-300-CCT / C35-PLC-360-300-CCT-MD
C35-PLC-360-HBL	5900280990228	PLC FRAME 360 MM HIGH BLACK	ø364x72	C35-PLC-360-300-CCT / C35-PLC-360-300-CCT-MD
C35-PLC-ZDWH	5900280990280	ACCESSORY FOR MOUNTING PLC LUMINAIRES ON A ROD WHITE		
C35-PLC-ZDBL	5900280990273	ACCESSORY FOR MOUNTING PLC LUMINAIRES ON A ROD BLACK		
C35-PLC-ZLWH	5900280990266	ACCESSORY FOR PENDANT-MOUNTING OF PLC LUMINAIRES WHITE		
C35-PLC-ZLBL	5900280990259	ACCESSORY FOR PENDANT MOUNTING OF PLC LUMINAIRES BLACK		
C35-PLC-MD	5900280990297	MICROWAVE MOTION AND TWILIGHT SENSOR WITH A DIMMING FUNCTION FOR PLC LUMINAIRES		

PSF711, PSF712 GABI

LED DECKENLEUCHTEN

MATERIAL ▶ PC
MATERIAL ▶ PC



PSF711



PSF712





▶ PSF711-124



▶ PSF711-304



▶ PSF712-304



LiFUD merryfek

RAL
Full range
of enclosure colours
Full colour palette



built-in LED light sources



PSF712 in RAL9016 colour



mounting brackets



hermetic gland



sensor adjustment



LIFUD power supply

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C36-PSF711-304	5900280950451	1/6	4000	30	3500	no
C36-PSF712-304	5900280950475	1/6	4000	30	3500	no
C36-PSF711-124-MD	5900280959652	1/5	4000	12	1200	microwave
C36-PSF711-304-MD	5900280950468	1/6	4000	30	3500	microwave sensor with dimming function
C36-PSF712-304-MD	5900280950482	1/6	4000	30	3500	microwave sensor with dimming function

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ▶ PC

MATERIAL ▶ PC

PSF707 DIANA





PSF707



PSF707-BL



▶ PSF707-164

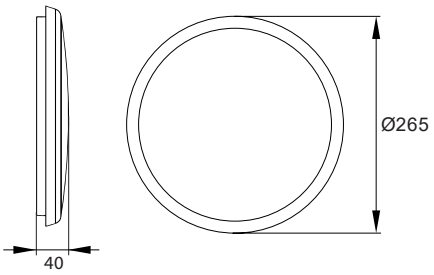

▶ PSF707-224

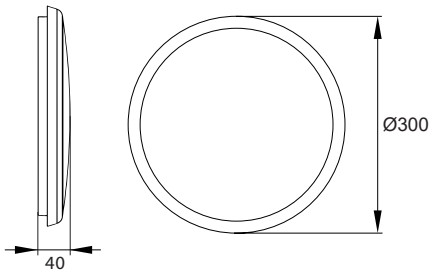





low profile of the luminaire



voltage hold function



closed connection terminal



sensor adjustment LUX / SENS / TIME / STBY



mounting bracket



certificate of the National Institute of Hygiene

code	EAN	package	colour	colour temperature [K]	power [W]	luminous flux [lm]	built-in motion sensor
C36-PSF707-164	5900280939739	1/10	white	4000	16	1600	no
C36-PSF707-224	5900280926715	1/10	white	4000	22	2200	no
C36-PSF707-164-MD	5900280939746	1/10	white	4000	16	1600	microwave sensor with dimming function
C36-PSF707-224-MD	5900280924018	1/10	white	4000	22	2200	microwave sensor with dimming function
C36-PSF707-164-BL	5900280991768	1/10	black	4000	16	1600	no
C36-PSF707-224-BL	5900280991782	1/10	black	4000	22	2200	no
C36-PSF707-164-BL-MD	5900280991775	1/10	black	4000	16	1600	microwave sensor with dimming function
C36-PSF707-224-BL-MD	5900280991799	1/10	black	4000	22	2200	microwave sensor with dimming function

PSF706 KATIA

LED DECKENLEUCHTEN

MATERIAL ▶ PC

MATERIAL ▶ PC

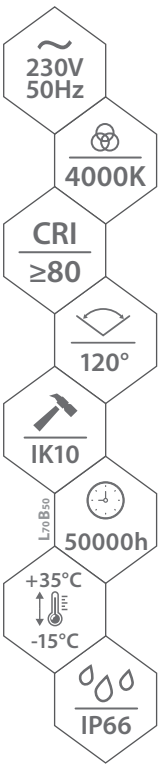



PSF706











PSF706-BL





milky cover



enclosure in RAL9016 colour



luminaire hinge



gland ensuring IP66



mounting bracket



power connection

BEMKO code	EAN	package	colour	colour temperature [K]	P_{ON} power in on-mode / dimming mode [W]	luminous flux [lm] 100% / 20% (dimming)	built-in motion sensor
C36-PSF706-164	5900280923509	1/5	white	4000	16	1600	no
C36-PSF706-224	5900280939722	1/5	white	4000	22	2000	no
C36-PSF706-164-MD	5900280918475	1/5	white	4000	16 / 3.5	1600 / 320	microwave sensor with a dimming function
C36-PSF706-224-MD	5900280921086	1/5	white	4000	22 / 4.4	2000 / 400	microwave with a dimming function
C36-PSF706-164-EM	5900280918499	1/5	white	4000	16	1600	microwave sensor + voltage hold function
C36-PSF706-164-BL	5900280991720	1/5	black	4000	16	1600	no
C36-PSF706-224-BL	5900280991744	1/5	black	4000	22	2000	no
C36-PSF706-164-BL-MD	5900280991737	1/5	black	4000	16 / 3.5	1600 / 320	microwave sensor with a dimming function
C36-PSF706-224-BL-MD	5900280991751	1/5	black	4000	22 / 4.4	2000 / 400	microwave sensor with a dimming function

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ► steel, cover: PMMA
MATERIAL ► stahl, schirm: PMMA

PSF704 PAULA

PSF704

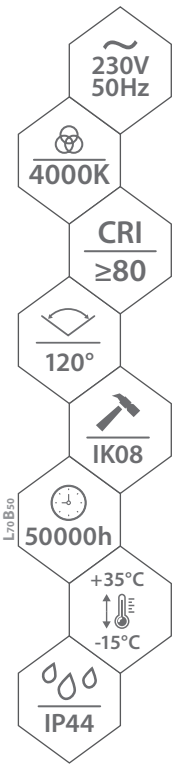

► PSF704-104/124



► PSF704-184/224





built-in LED light sources



MD models – power supply with a dimming function – 20% power



connection terminal



opal diffuser



luminaire sealing

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	built-in motion sensor
C36-PSF704-124	5900280939661	1/6	4000	12	1200	no
C36-PSF704-184	5900280939685	1/6	4000	18	1550	no
C36-PSF704-244	5900280939708	1/6	4000	24	1900	no
C36-PSF704-124-MD	5900280939678	1/6	4000	12	1200	microwave sensor with dimming function
C36-PSF704-184-MD	5900280939692	1/6	4000	18	1550	microwave sensor with dimming function
C36-PSF704-244-MD	5900280939715	1/6	4000	24	1900	microwave sensor with dimming function

LED CEILING LAMP

PLA PLATO

LED DECKENLEUCHTEN

MATERIAL ► steel, cover: plastic
MATERIAL ► stahl, schirm: kunststof

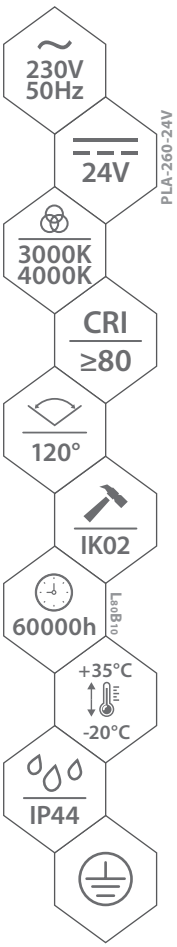



PLA

NEW

5 YEARS WARRANTY



	a [mm]	b [mm]
PLA-260:	Ø254	90
PLA-285:	Ø285	91
PLA-350:	Ø325	102
PLA-450:	Ø435	115


built-in LED light sources


new isolated power supply


connection terminal


opal diffuser


built-in motion sensor in MS and MD versions

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C37-PLA-260-120-3K	5900280975102	1/10	3000	12	1130	no
C37-PLA-260-120-4K	5900280975126	1/10	4000	12	1130	no
C37-PLA-285-180-3K	5900280975157	1/10	3000	18	1620	no
C37-PLA-285-180-4K	5900280975171	1/10	4000	18	1620	no
C37-PLA-350-240-3K	5900280975195	1/5	3000	24	2160	no
C37-PLA-350-240-4K	5900280975218	1/5	4000	24	2160	no
C37-PLA-450-360-3K	5900280975232	1/5	3000	36	3250	no
C37-PLA-450-360-4K	5900280975256	1/5	4000	36	3250	no
C37-PLA-260-120-3K-MS	5900280975119	1/10	3000	12	1130	microwave
C37-PLA-260-120-4K-MS	5900280975140	1/10	4000	12	1130	microwave
C37-PLA-285-180-3K-MS	5900280975164	1/10	3000	18	1620	microwave
C37-PLA-285-180-4K-MS	5900280975188	1/10	4000	18	1620	microwave
C37-PLA-350-240-3K-MS	5900280975201	1/5	3000	24	2160	microwave
C37-PLA-350-240-4K-MS	5900280975225	1/5	4000	24	2160	microwave
C37-PLA-450-360-3K-MS	5900280975249	1/5	3000	36	3250	microwave
C37-PLA-450-360-4K-MS	5900280975263	1/5	4000	36	3250	microwave
C37-PLA-260-120-4K-24V	5900280975133	1/10	4000	12	1130	no
C37-PLA-260-120-4K-MD	5900280982339	1/10	4000	12	1130	microwave sensor with dimming function

E27 CEILING LIGHT FIXTURE

E27 DECKENLEUCHTEN

MATERIAL ► steel, cover: plastic
MATERIAL ► stahl, schirm: kunststof

PLA PLATO E27

NEW

5 YEARS WARRANTY



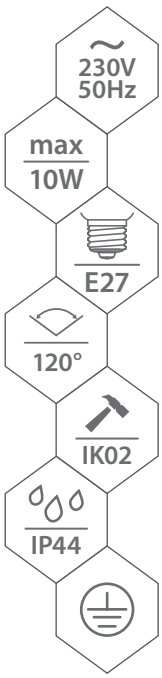

PLA-E27





light source holder with an E27* socket



opal diffuser



built-in motion sensor in MS versions

BEMKO code	EAN	package	P maximum power of the source [W] *	built-in motion sensor
C37-PLA-260-1E27	5900280975447	1/10	1x 10 W LED, A60	no
C37-PLA-260-1E27-MS	5900280981400	1/10	1x 20 W LED, A60	microwave
C37-PLA-285-2E27	5900280975454	1/10	2x 10 W LED, A60	no
C37-PLA-285-2E27-MS	5900280981417	1/10	2x 20 W LED, A60	microwave

* No light source included

LHR, LHS TOFIR

LED DECKENLEUCHTEN

MATERIAL ► steel, cover: plastic
MATERIAL ► stahl, schirm: kunststof

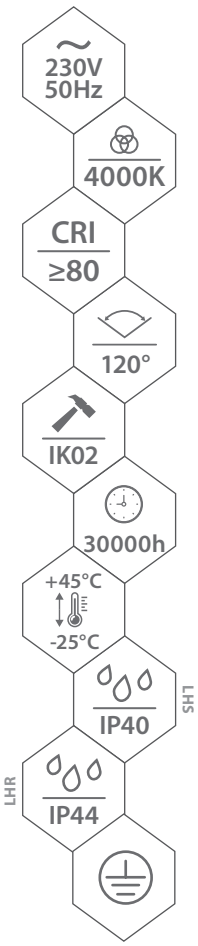



LHS

5 YEARS WARRANTY



LHR

► LHR



a	b
[mm]	[mm]
LHR-330: Ø330	100

► LHS



a	b
[mm]	[mm]
LHS-310: 300	100

RAL
Full range
of enclosure colours
Full colour palette



opal diffuser with silver aluminium frame



connection terminal



LHS
interior of the luminaire



possibility of installing microwave motion sensor



LHS
cover catch

BEMKO code	EAN	package	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C31-LHR-330-160-4K	5900280914767	1/10	16	1250	no
C31-LHR-330-160-4K-MS	5900280921475	1/10	16	1250	microwave
C31-LHS-310-160-4K	5900280914743	1/10	16	1250	no
C31-LHS-310-160-4K-MS	5900280921468	1/10	16	1250	microwave

E27 CEILING LIGHT FIXTURE

DECKENLEUCHTEN

MATERIAL ► steel, cover: plastic
MATERIAL ► stahl, schirm: kunststof

PHR, PHS TOFIR

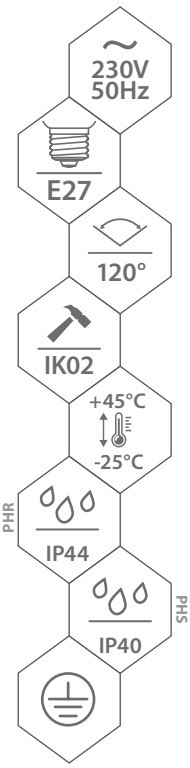



PHR



PHS

►PHR



[mm]	a	b
PHR220:	Ø330	100

►PHS



[mm]	a	b
PHS220:	320	100

RAL
Full range
of enclosure colours
Full colour palette



opal diffuser with silver aluminium frame



light source holder with an E27* socket



possibility of installing microwave motion sensor



PHS cover catch

BEMKO code	EAN	package	P maximum power of the source [W]	built-in motion sensor
C30-PHR220	5900280901934	1/6	2x 20 W LED, A60	no
C30-PHR220-MS	5900280926371	1/6	2x 20 W LED, A60	microwave
C30-PHS220	5900280901965	1/6	2x 20 W LED, A60	no
C30-PHS220-MS	5900280926388	1/6	2x 20 W LED, A60	microwave

* No light source included

E27 CEILING LIGHT

ST35 LINE

LED DECKENLEUCHTEN

MATERIAL ▶ PC

MATERIAL ▶PC



NEW

5 YEARS WARRANTY

ST35





model with twilight sensor ST35-104-DS



set of stickers as a separate accessory for the luminaire



possibility to change luminaire power 5-7-10 W



perfect light diffusion



sensitivity adjustable with a potentiometer 3-50lx

BEMKO code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	built-in twilight sensor
C38-ST35-104	5900280997272	1/10	4000	5 / 7 / 10	500 / 700 / 1000	no
C38-ST35-104-DS	5900280997289	1/10	4000	5 / 7 / 10	500 / 700 / 1000	yes
C38-ST35-NR	5900280997296	1/10	ST35 STICKER SET FOR CEILING LAMPS			

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ► PC

MATERIAL ► PC

ST41 TAWAN, ST79 BIANKA

NEW

5 YEARS WARRANTY

ST79



ST41

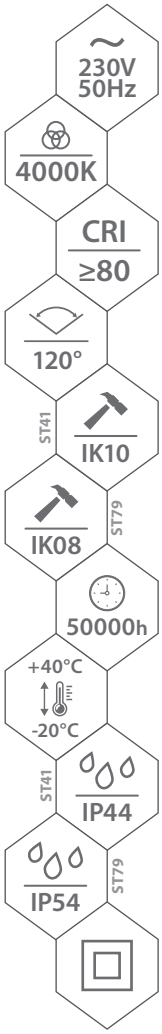

► ST41



► ST79

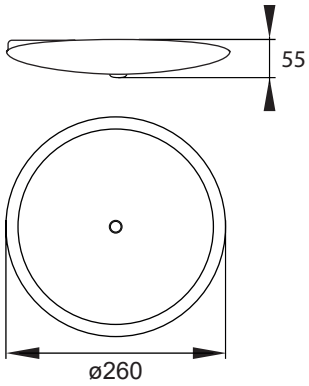



ST41 – screw terminal connector



possibility to adjust the sensor after installation



ST79 – simple installation with a quick connector



built-in PIR motion sensor with a detection range of 6 m



time & lux adjustable light intensity and light time duration

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	built-in motion sensor
C38-ST41-104-PIR	5900280922731	1/10	4000	10	940	yes (infrared sensor)
C38-ST41-154-PIR	5900280922755	1/10	4000	15	1300	yes (infrared sensor)
C38-ST79-154-PIR	5900280997265	1/10	4000	15	1500	yes (infrared sensor)

ST72, ST75 TAZAN

E27 DECKENLEUCHTEN

	ST72-140G	ST72-125P	ST75
MATERIAL ►	PC, cover: glass	PC, cover: PMMA	steel, cover: glass
MATERIAL ►	PC, schirm: glas	PC, schirm: PMMA glas	stahl, schirm: glas

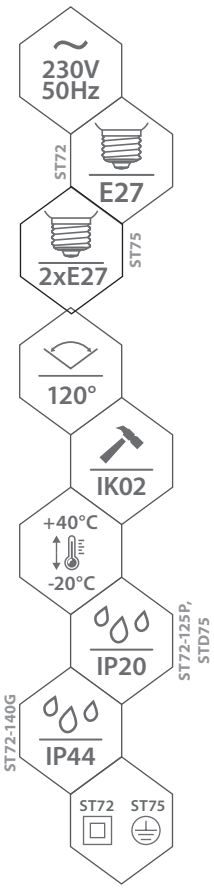

ST72



ST75

5 YEARS WARRANTY

▶ ST72-G



▶ ST72-P



▶ ST75





ST72 – connection terminal



ST72 – LUX / SENS / TIME sensor adjustment



ST72 – steel reflector



ST75-PIR infrared motion sensor



ST75-PIR interior of the luminaire

BEMKO code	EAN	package	P maximum power of the source [W] *	built-in motion sensor
C38-ST72-140G-MS	5900280904744	1/5	max. 1x 60 W LED, A60	yes – microwave sensor
C38-ST72-125P-MS	5900280904737	1/5	max. 1x 25 W LED, A60	yes – microwave sensor
C38-ST75-240G-PIR	5908311363461	1/5	max. 2x40 W LED, A60	yes – infrared sensor

* No light source included

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ► steel, cover: PC
MATERIAL ► stahl, schirm: PC

ST57, ST58 DORIA





ST57-PIR

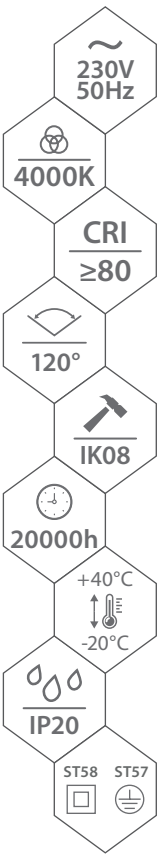



ST58-PIR

ST58

► ST57-PIR



► ST58



► ST58-PIR







built-in LED
light sources



sensor adjustment
TIME / LUX



infrared motion sensor



connection terminal

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C38-ST57-124-PIR	5900280915801	1/10	4000	12	1000	yes – infrared sensor
C38-ST57-204-PIR	5900280921062	1/10	4000	20	1500	yes – infrared sensor
C38-ST58-124	5900280929419	1/10	4000	12	1000	no
C38-ST58-124-PIR	5900280926883	1/10	4000	12	1000	yes – infrared sensor

KAN, KAN2 KANLO

LED DECKENLEUCHTEN

MATERIAL ▶ PC

MATERIAL ▶ PC





KAN-BL



KAN2-BLR



KAN2-BLO





KAN-WH

KAN2-WHR



KAN2-WHO

▶ KAN



▶ KAN2-R

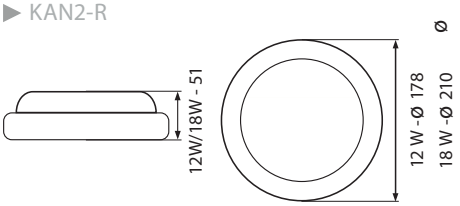

▶ KAN2-O





opal diffuser



LED light sources with integrated power supply



hermetic gland



connection terminal



MS – built-in microwave sensor
detection range: 120° max.7m
time: 20 s illuminance < 20 lux

BEMKO code	EAN	package	colour	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	built-in motion sensor
C45-KAN-08-BL-4K	5900280919298	1/10	black	4000	8	720	no
C45-KAN-08-WH-4K	5900280919311	1/10	white	4000	8	720	no
C45-KAN2-08-BLO-4K	5900280968432	1/40	black	4000	8	760	no
C45-KAN2-08-WHO-4K	5900280968371	1/40	white	4000	8	760	no
C45-KAN2-12-BLR-4K	5900280968449	1/40	black	4000	12	1150	no
C45-KAN2-12-WHR-4K	5900280968388	1/40	white	4000	12	1150	no
C45-KAN2-18-BLR-4K	5900280968456	1/40	black	4000	18	1750	no
C45-KAN2-18-WHR-4K	5900280968395	1/40	white	4000	18	1750	no
C45-KAN2-08-BLO-4K-MS	5900280968463	1/40	black	4000	8	760	microwave sensor
C45-KAN2-08-WHO-4K-MS	5900280968401	1/40	white	4000	8	760	microwave sensor
C45-KAN2-12-BLR-4K-MS	5900280968470	1/40	black	4000	12	1150	microwave sensor
C45-KAN2-12-WHR-4K-MS	5900280968418	1/40	white	4000	12	1150	microwave sensor
C45-KAN2-18-BLR-4K-MS	5900280968487	1/40	black	4000	18	1750	microwave sensor
C45-KAN2-18-WHR-4K-MS	5900280968425	1/40	white	4000	18	1750	microwave sensor

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ► steel, cover: PMMA
MATERIAL ► Stahl, Lampenschirm: PMMA

PLF FIONA

NEW

2 YEARS WARRANTY



PLF-230



PLF-320

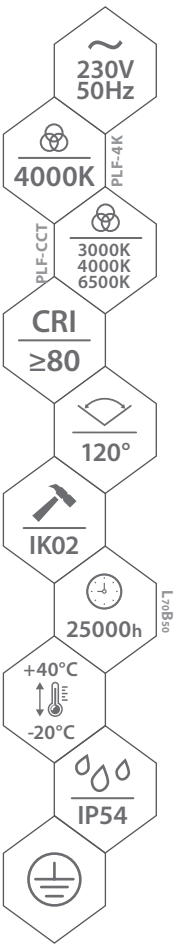



CCT- possibility to select the colour temperature

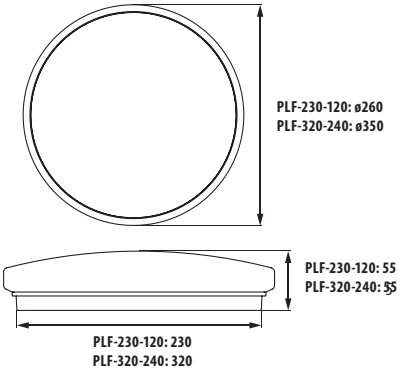



opal diffuser



perfect light diffusion with the cover



connection terminal



possibility to change colour temperature

KAFLER code	EAN	package	colour	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C37-PLF-230-120-4K	5902138400347	1/10	white	4000	12	1200
C37-PLF-230-120-CCT	5902138400361	1/10	white	3000 / 4000 / 6500	12	1200
C37-PLF-320-240-4K	5902138400354	1/10	white	4000	24	2400
C37-PLF-320-240-CCT	5902138400378	1/10	white	3000 / 4000 / 6500	24	2400

LED DOWNLIGHT LUMINAIRE

DLB BOLED

DOWNLIGHT-LED-LEUCHTEN

MATERIAL ► aluminium alloy, cover: PMMA
MATERIAL ► aluminiumlegierung, schirm: PMMA

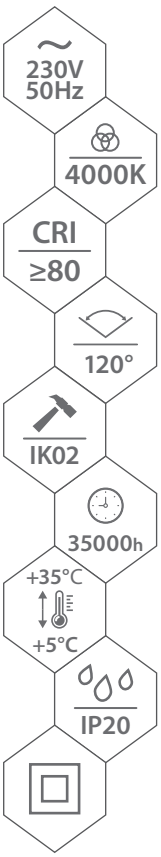



DLB-R



DLB-S

5 YEARS WARRANTY

► DLB-R



DLB-R-090: Ø145
DLB-R-120: Ø170
DLB-R-180: Ø220
DLB-R-240: Ø295

► DLB-S



DLB-S-090: 145
DLB-S-120: 170
DLB-S-180: 220
DLB-S-240: 295



compatible with an emergency lighting module



flush-mounted fitting with brackets



external power supply included



quick-connect power supply for easy installation



mounting hole diameters

DLB-R-090: Ø135 mm
DLB-R-120: Ø155mm
DLB-R-180: Ø205mm
DLB-R-240: Ø285mm
DLB-S-090: 135x135mm
DLB-S-120: 155x155mm
DLB-S-180: 205x205mm
DLB-S-240: 285x285mm

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C70-DLB-R-090-4K	5900280908117	1/30	4000	9	720
C70-DLB-R-120-4K	5900280908124	1/30	4000	12	960
C70-DLB-R-180-4K	5900280908131	1/20	4000	18	1450
C70-DLB-R-240-4K	5900280908148	1/10	4000	24	1700
C70-DLB-S-090-4K	5900280911377	1/30	4000	9	720
C70-DLB-S-120-4K	5900280911384	1/30	4000	12	960
C70-DLB-S-180-4K	5900280911391	1/20	4000	18	1450
C70-DLB-S-240-4K	5900280911407	1/10	4000	24	1700

LED CEILING LAMP

LED DECKENLEUCHTEN

MATERIAL ► aluminium alloy, cover: PMMA
MATERIAL ► aluminiumlegierung, schirm: PMMA

SLS, SLR TALAR



SLS



SLR



► SLR



a [mm]	
SLR-120:	Ø 115
SLR-180:	Ø 168
SLR-240:	Ø 217
SLR-300:	Ø 295

► SLR



b [mm]	
SLS-120:	115x115
SLS-180:	168x168
SLS-240:	217x217
SLS-300:	295x295

SAMSUNG LED inside

RAL
Full range
of enclosure colours
Full colour palette



SLS enclosure in RAL9005 colour



robust design



holes to aid cooling of the luminaire



external power supply included



quick-connect power supply for easy installation

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C39-SLS-120-060-4K	5900280909862	1/20	4000	6	570
C39-SLS-180-120-4K	5900280909886	1/20	4000	12	1140
C39-SLS-240-180-4K	5900280909909	1/10	4000	18	1710
C39-SLS-300-240-4K	5900280914699	1/10	4000	24	2150
C39-SLR-120-060-4K	5900280909800	1/20	4000	6	570
C39-SLR-180-120-4K	5900280909824	1/10	4000	12	1140
C39-SLR-240-180-4K	5900280909848	1/10	4000	18	1710
C39-SLR-300-240-4K	5900280914651	1/20	4000	24	2150

DLF2 FALED 2

DOWNLIGHT-LED-LEUCHTEN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► aluminiumlegierung, kunststof

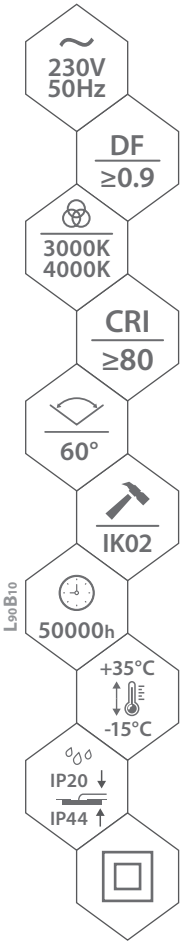



DLF2



DLF2-N

5 YEARS WARRANTY

► DLF2

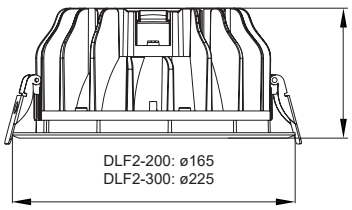

DLF2-200: 85
DLF2-300: 95

► DLF2-N





opal diffuser



connection terminal



flush-mounted fitting with brackets



high heat dissipation efficacy



isolated power supply



mounting hole diameters

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C70-DLF2-100-4K	5900280969248	1	4000	10	1040
C70-DLF2-200-3K	5900280967886	1/20	3000	20	2150
C70-DLF2-200-4K	5900280951052	1/20	4000	20	2200
C70-DLF2-300-3K	5900280967879	1/10	3000	30	3800
C70-DLF2-300-4K	5900280951069	1/10	4000	30	3900
C70-DLF2-200-3K-N	5900280988973	1	3000	20	2150
C70-DLF2-200-4K-N	5900280988980	1	4000	20	2200

LED DOWNLIGHT LUMINAIRE

DOWNLIGHT-LED-LEUCHTEN

MATERIAL ▶ plastic
MATERIAL ▶ kunststof

DLW WALED



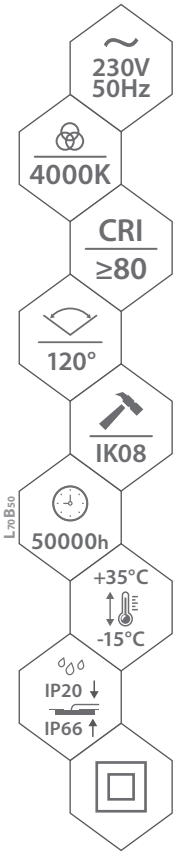



DLW-R050



DLW-S185

▶ DLW-S185

	a [mm]	b [mm]
DLW-S075:	75	20
DLW-S125:	125	20
DLW-S185:	185	20
DLW-S215:	215	20



▶ DLW-R050

	a [mm]	b [mm]
DLW-R075:	Ø 75	20
DLW-R125:	Ø 125	20
DLW-R185:	Ø 185	20
DLW-R215:	Ø 215	20





external power supply included



flush-mounted fitting with brackets



heat sink at the back of the case



degree of tightness



certificate of the National Institute of Hygiene



mounting hole diameters

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C70-DLW-R075-050-4K-WH	5900280932143	1/40	4000	5	420
C70-DLW-R125-100-4K-WH	5900280932150	1/40	4000	10	860
C70-DLW-R185-180-4K-WH	5900280932167	1/20	4000	18	1550
C70-DLW-R215-260-4K-WH	5900280932174	1/20	4000	26	2220
C70-DLW-S075-050-4K-WH	5900280932181	1/40	4000	5	420
C70-DLW-S125-100-4K-WH	5900280932198	1/40	4000	10	860
C70-DLW-S185-180-4K-WH	5900280932204	1/20	4000	18	1550
C70-DLW-S215-260-4K-WH	5900280932211	1/20	4000	26	2220

DLO ORTAL

DOWNLIGHT-LEUCHTEN

MATERIAL ▶ aluminium alloy
MATERIAL ▶ aluminiumlegierung





DLO-AR-GU10-150-WH



DLO-AR-GU10-150-BL



DLO-AS-GU10-150-WH





DLO-AS-GU10-150-BL



DLO-AS-GU10-250-WH



DLO-AS-GU10-250-BL

▶ DLO-AR-GU10-150



▶ DLO-AS-GU10-150



▶ DLO-AS-GU10-250





Dedicated light source
Dedicated light source
SLB-GU10



DLO-AS-GU10-150
GU10 socket



DLO-AS-GU10-250
GU10 sockets



DLO-AR-GU10-150
connection terminal



DLO-AS-GU10-150
connection terminal



adjustable lighting
direction

BEMKO code	EAN	package	colour	P maximum power of the source [W]*
C23-DLO-AR-GU10-150-BL	5900280944283	1/20	black	1x 50 W
C23-DLO-AR-GU10-150-WH	5900280944290	1/20	white	1x 50 W
C23-DLO-AS-GU10-150-BL	5900280944306	1/20	black	1x 50 W
C23-DLO-AS-GU10-150-WH	5900280944313	1/20	white	1x 50 W
C23-DLO-AS-GU10-250-BL	5900280944320	1/10	black	2x 50 W
C23-DLO-AS-GU10-250-WH	5900280944337	1/10	white	2x 50 W

* No light source included

DOWNLIGHT LUMINAIRE

DOWNLIGHT-LEUCHTEN

MATERIAL ► aluminium alloy
MATERIAL ► aluminiumlegierung

DLU ULTER







DLU-R-GU10-150-WH



DLU-R-GU10-150-BL



DLU-AR-GU10-150-WH



DLU-AR-GU10-150-BL

► DLU-R-GU10





► DLU-AR-GU10







Dedicated light source
Dedicated light source
SLB-GU10



modern design



simple surface mounting



GU10 socket



connection terminal



DLU-AR adjustable lighting direction

BEMKO code	EAN	package	colour	P maximum power of the source [W]*
C23-DLU-R-GU10-150-BL	5900280944344	1/50	black	1x 50 W
C23-DLU-R-GU10-150-WH	5900280944351	1/50	white	1x 50 W
C23-DLU-AR-GU10-150-BL	5900280944368	1/40	black	1x 50 W
C23-DLU-AR-GU10-150-WH	5900280944375	1/40	white	1x 50 W

* No light source included

LED DOWNLIGHT LUMINAIRE

DLM MAFED

DOWNLIGHT-LED-LEUCHTEN

MATERIAL ► aluminium alloy, plastic
MATERIAL ► Aluminiumlegierung, Kunststoff





DLM-BL



DLM-WH

5 YEARS WARRANTY

► DLM-300 ► DLM-200





COB diode with silver reflector



modern design, robust design



simple surface mounting

RAL
Full range of enclosure colours
Full colour palette

code	EAN	package	colour	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C70-DLM-200-3K-WH	5900280967923	1/20	white	3000	20	1800	F
C70-DLM-200-3K-BL	5900280967916	1/20	black	3000	20	1800	F
C70-DLM-200-4K-WH	5900280950574	1/20	white	4000	20	1800	F
C70-DLM-200-4K-BL	5900280966803	1/20	black	4000	20	1800	F
C70-DLM-300-3K-WH	5900280967893	1/10	white	3000	30	2800	F
C70-DLM-300-3K-BL	5900280967909	1/10	black	3000	30	2800	F
C70-DLM-300-4K-WH	5900280950581	1/10	white	4000	30	2820	E
C70-DLM-300-4K-BL	5900280966797	1/10	black	4000	30	2820	E

LED WALL LAMP

LED SPIEGELLEUCHTE

MATERIAL ► aluminium profile, plastic
MATERIAL ► Aluminiumprofil, Kunststoff

MLK KEIRA

UGR < 19

5 YEARS WARRANTY



MLK-800-4K-CR



MLK-600-4K-WH

~ 230V 50Hz
DF ≥0.5
4000K
CRI ≥80
120°
50000h
+45°C -20°C
IP44

MLK-400: 400
MLK-600: 600
MLK-800: 800

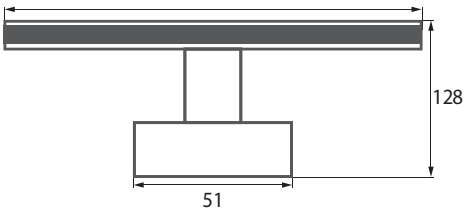



MLK-400-4K-BL



3 enclosure colours to choose from



IP44 junction box included



wall-mounted



above a mirror



to a cabinet

code	EAN	package	enclosure colour	colour temperature [K]	power [W]	luminous flux [lm]
C22-MLK-400-4K-BL	5900280978127	1/20	black	4000	8	600
C22-MLK-400-4K-CR	5900280978097	1/20	chrome	4000	8	600
C22-MLK-400-4K-WH	5900280978158	1/20	white	4000	8	600
C22-MLK-600-4K-BL	5900280978134	1/20	black	4000	12	900
C22-MLK-600-4K-CR	5900280978103	1/20	chrome	4000	12	900
C22-MLK-600-4K-WH	5900280978165	1/20	white	4000	12	900
C22-MLK-800-4K-BL	5900280978141	1/20	black	4000	15	1125
C22-MLK-800-4K-CR	5900280978110	1/20	chrome	4000	15	1125
C22-MLK-800-4K-WH	5900280978172	1/20	white	4000	15	1125

LED PENDANT LUMINAIRE

RING

LED-PENDELLEUCHTE

MATERIAL ► aluminium alloy, plastic
MATERIAL ► aluminiumlegierung, kunststof

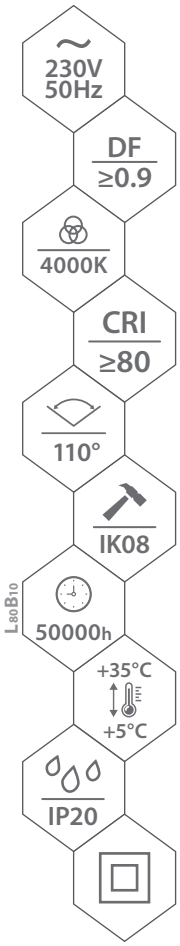



RING-90105A



RING-9016A

5 YEARS WARRANTY

DALI

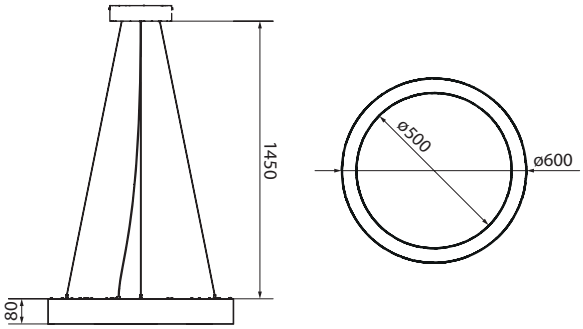

► Standard luminaire dimensions

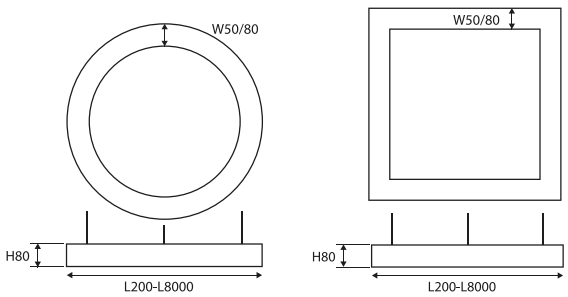

► Luminaire dimensions available on request



two enclosure colours: white, black



elegant, minimalist design



BOKE isolated power supply with an option to modify power



standard quick connector

LUXMENA code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C24-RING-060A-40B-840B-9005A-1B	5900280998712	1/10	4000	21-40	4000
C24-RING-060A-40B-840B-9016A-1B	5900280998729	1/10	4000	21-40	4000

LINEAR LUMINAIRE

LINEARE LEUCHTE

LOR LORIEN

MATERIAL ► aluminium profile
MATERIAL ► Aluminiumprofil

NEW

5 YEARS WARRANTY





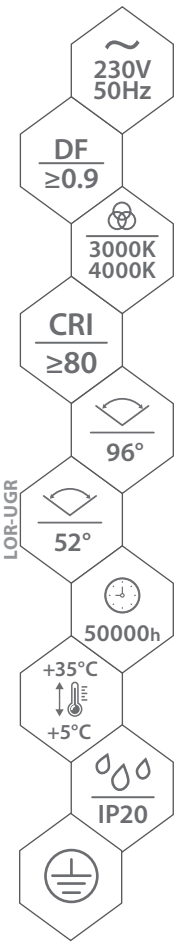









pendant and surface-mounting accessories included



100 cm power cable in enclosure colour



isolated power supply for increased luminaire life



models with UGR<19 providing eye comfort during work



additional accessory – round ceiling rosettes

BEMKO code	EAN	package	enclosure colour	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C26-LOR-30BL-3K	5900280984432	1/10	black	3000	30	3150
C26-LOR-30BL-4K	5900280984418	1/10	black	4000	30	3450
C26-LOR-30WH-3K	5900280984425	1/10	white	3000	30	3600
C26-LOR-30WH-4K	5900280984401	1/10	white	4000	30	3900
C26-LOR-30BL-4K-UGR	5900280994400	1/10	black	4000	30	3300
C26-LOR-30WH-4K-UGR	5900280994394	1/10	white	4000	30	3600
C26-LOR-40BL-3K	5900280984470	1/10	black	3000	40	4200
C26-LOR-40BL-4K	5900280984456	1/10	black	4000	40	4400
C26-LOR-40WH-3K	5900280984463	1/10	white	3000	40	4600
C26-LOR-40WH-4K	5900280984449	1/10	white	4000	40	5000
C26-LOR-RO-BL	5900280984494	1/50	black	ROUND BLACK CEILING ROSETTE WITH 100 CM CABLE		
C26-LOR-RO-WH	5900280984487	1/50	white	ROUND WHITE CEILING ROSETTE WITH 100 CM CABLE		

SURFACE-MOUNTED LINEAR LUMINAIRE

QLS “QUALIS”

LINEARE LEUCHTE
MATERIAL ► Aluminum, PC
MATERIAL ► Aluminium, PC

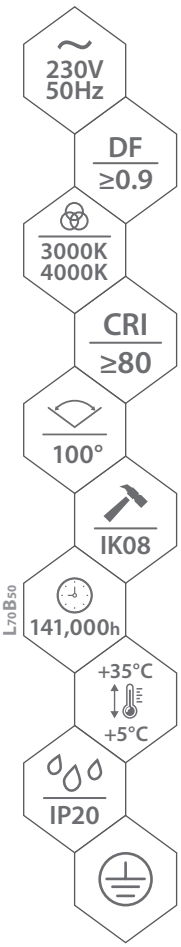



POLISH PRODUCT QUALITY GUARANTEE

5 YEARS WARRANTY

Intended use:

- representative rooms
- office and commercial facilities
- car dealers
- galleries, museums

powered by TRIDONIC

RAL
Full range
of enclosure colours
Full colour palette

NARODOWY INSTYTUT ZDROWIA PUBLICZNEGO · PIB · PRODUKT Z ATESTEM
certificate of the National Institute of Hygiene


standard enclo-sure colours

DALI SYSTEM
option to install DALI system


4 models of cover available


possibility of through-feed


simple luminaire connection


option to install motion sensors PIR / microwave sensor*

code	type	colour temperature [K]	power [W]	luminous flux [lm]	dimensions [mm]
C27-QLS-056	linear	3000 / 4000	15	2100	560x55x50
C27-QLS-084	linear	3000 / 4000	22	3100	840x55x50
C27-QLS-112	linear	3000 / 4000	30	4200	1120x55x50
C27-QLS-140	linear	3000 / 4000	38	5320	1400x55x50
C27-QLS-168	linear	3000 / 4000	46	6440	1680x55x50
C27-QLS-196	linear	3000 / 4000	54	7560	1960x55x50
C27-QLS-224	linear	3000 / 4000	60	8,400	2240x55x50

*Only applies to linear luminaires.

SURFACE-MOUNTED LINEAR LUMINAIRE

AUFSITZMONTIERTE LINEARLEUCHTE

MATERIAL ► Aluminum, PC

MATERIAL ► Aluminium, PC

QLS “QUALIS”



QLS-30L



QLS-30T



QLS-30X



QLS-3LH



QLS-30Y



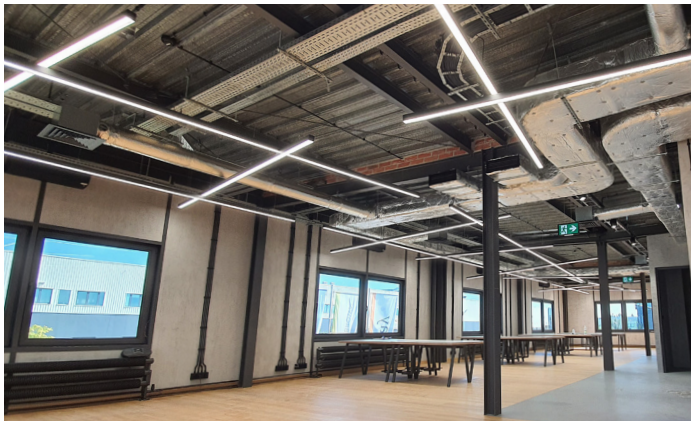

code	type	colour temperature [K]	power [W]	luminous flux [lm]	dimensions [mm]
C27-QLS-30L	connector	3000 / 4000	15	2100	310x310
C27-QLS-30T	connector	3000 / 4000	22	3080	570x310
C27-QLS-30Y	connector	3000 / 4000	22	3080	520x450
C27-QLS-30X	connector	3000 / 4000	30	4200	570x570
C27-QLS-3LH	connector	3000 / 4000	15	2100	300x300

SURFACE-MOUNTED LINEAR LUMINAIRE

QLS K,S,X,H

AUFSITZMONTIERTE LINEARLEUCHTE

MATERIAL ► Aluminum, PC
MATERIAL ► Aluminium, PC

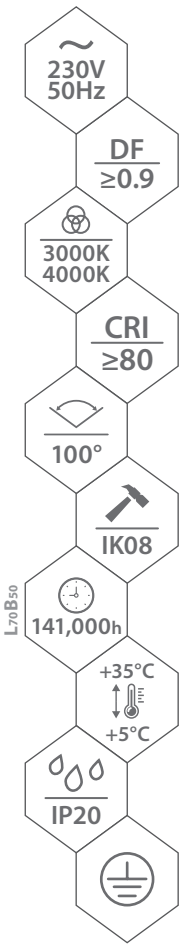



QLS-S



QLS-K



QLS-H



QLS-X

RAL
Full range
of enclosure colours
Full colour palette

powered by
TRIDONIC



standard enclo-
sure colours

DALI SYSTEM

option to install
DALI system



4 models available
of cover available



possibility of
through-feed



simple luminaire
connection



option to install
motion sensors
PIR / microwave sensor

LUXMENA code	type	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	dimensions [mm]
C27-QLS-056	linear	3000 / 4000	15	2100	560x55x50
C27-QLS-084	linear	3000 / 4000	22	3100	840x55x50
C27-QLS-112	linear	3000 / 4000	30	4200	1120x55x50
C27-QLS-140	linear	3000 / 4000	38	5320	1400x55x50
C27-QLS-168	linear	3000 / 4000	46	6440	1680x55x50
C27-QLS-196	linear	3000 / 4000	54	7560	1960x55x50
C27-QLS-K56A	wall light	3000 / 4000	15	2100	560x100x55
C27-QLS-K84A	wall light	3000 / 4000	22	3100	840x100x55
C27-S34A-30A	square	3000 / 4000	30	4200	340x340x55
C27-S62A-30A	square	3000 / 4000	60	8400	620x620x55

FLUSH-MOUNTED LINEAR LUMINAIRE

LINEARE FLUSH-LEUCHTE

QLR "QUALER"







QLR-112

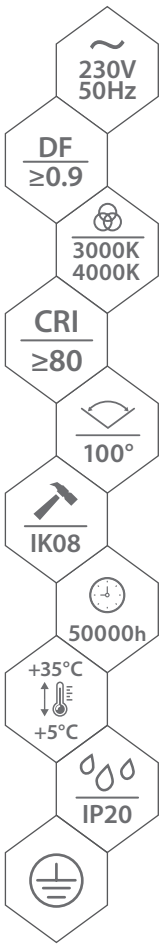



QLR-60L

Intended use:

- representative rooms
- office and commercial facilities
- car dealers
- galleries, museums



mounting bracket



installation clips



4 models available of cover available



possibility of through-feed



simple luminaire connection



option to install motion sensors PIR / microwave sensor

LUXMENA code	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	dimensions of mounting holes [mm]	+EM possibility of installing an emergency module
C27-QLR-056	3000 / 4000	15	1850	566x56	✗
C27-QLR-084	3000 / 4000	22	2750	846x56	✗
C27-QLR-112	3000 / 4000	30	3750	1126x56	✓
C27-QLR-140	3000 / 4000	38	4750	1406x56	✓
C27-QLR-168	3000 / 4000	46	6750	1686x56	✓
C27-QLR-196	3000 / 4000	54	8100	1966x56	✓
C27-QLR-224	3000 / 4000	60	7500	2246x56	✓
C27-QLR-60L	3000 / 4000	30	3750	606x606x56	✗

VRK VERKO 1F GU10

STRAHLER 1P

MATERIAL ▶ aluminium alloy
MATERIAL ▶ aluminiumlegierung



NEW

5 YEARS WARRANTY



VRK-NT-GU10WH

▶ VRK-1F-GU10





VRK-1F-020WH



VRK-1F-GU10BL

▶ VRK-NT-GU10



▶ VRK-1F-020





Dedicated light source
Dedicated light source
SLB-GU10



focusing lens



mounting on 2-wire busbars



adjustment option vertically and horizontally



VRK-NT surface-mounted version



code	EAN	package	colour	colour temperature [K]	power [W]	max luminous flux [lm]
C41-VRK-1F-GU10WH	5900280977946	1/40	white		1x GU10 35 W*	
C41-VRK-1F-GU10BL	5900280977953	1/40	black		1x GU10 35 W*	
C41-VRK-NT-GU10BL	5900280977939	1/40	black		1x GU10 35 W*	
C41-VRK-NT-GU10WH	5900280977922	1/40	white		1x GU10 35 W*	
C40-VRK-1F-020WH-3K	5902138402242	1/40	white	3000	20	1500
C40-VRK-1F-020WH-4K	5902138402259	1/40	white	4000	20	1500
C40-VRK-1F-020BL-3K	5902138402228	1/40	black	3000	20	1500
C40-VRK-1F-020BL-4K	5902138402556	1/40	black	4000	20	1500

* No light source included

SPOTLIGHT 1F – ACCESSORIES

STRAHLER 1P - ZUBEHÖR

AS2



AS2-S10



AS2-I



AS2-L



AS2-T

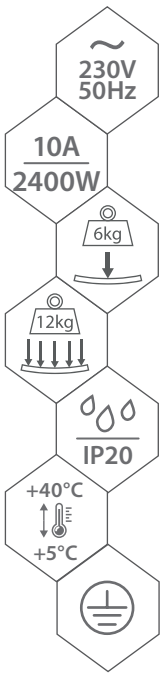



AS2-F



AS2-Z



AS2-C



AS2-ZML



BEMKO code	EAN	package	colour	description
C40-AS2-S20-BL	5902138401641	1/10	black	1-PHASE 2-WIRE BUSBAR 2.0 M BLACK WITH POWER SUPPLY AND END CAP
C40-AS2-S20-WH	5902138401658	1/10	white	1-PHASE 2-WIRE BUSBAR 2.0 M WHITE WITH POWER SUPPLY AND END CAP
C40-AS2-C-BL	5902138401696	1/50	black	BUSBAR END CAP 1-PHASE 2-WIRE BLACK
C40-AS2-C-WH	5902138401702	1/50	white	BUSBAR END CAP 1-PHASE 2-WIRE WHITE
C40-AS2-I-BL	5902138401672	1/50	black	CONNECTOR I FOR 1-PHASE 2-WIRE BUSBAR BLACK
C40-AS2-I-WH	5902138401665	1/50	white	CONNECTOR I FOR 1-PHASE 2-WIRE BUSBAR WHITE
C40-AS2-ZML-15-BL	5902138401689	1/50	black	MOUNTING KIT 1.5 M STANDARD CABLE FOR BUSBAR 1-PHASE BLACK
C40-AS2-ZML-15-WH	5902138402013	1/50	white	MOUNTING KIT 1.5 M STANDARD CABLE FOR BUSBAR 1-PHASE WHITE
C40-AS2-Z-BL	5902138401719	1/50	black	BUSBAR POWER SUPPLY 1-PHASE 2-WIRE WHITE
C40-AS2-Z-WH	5902138401726	1/50	white	BUSBAR POWER SUPPLY 1-PHASE 2-WIRE WHITE
C40-AS2-S10-BL	5902138401733	1/20	black	1-PHASE 2-WIRE BUSBAR 1.0 M BLACK WITH POWER SUPPLY AND END CAP
C40-AS2-S10-WH	5902138401740	1/20	white	1-PHASE 2-WIRE BUSBAR 1.0 M WHITE WITH POWER SUPPLY AND END CAP
C40-AS2-L-BL	5902138401764	1/50	black	L-CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR BLACK
C40-AS2-L-WH	5902138401757	1/50	white	L-CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR WHITE
C40-AS2-T-BL	5902138401979	1/50	black	T-CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR BLACK
C40-AS2-T-WH	5902138401986	1/50	white	T-CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR WHITE
C40-AS2-F-BL	5902138401993	1/50	black	FLEX CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR BLACK
C40-AS2-F-WH	5902138402006	1/50	white	FLEX CONNECTOR FOR 1-PHASE 2-WIRE BUSBAR WHITE

VSK VASKO

LED-STRAHLER

MATERIAL ► aluminium, PC
MATERIAL ► aluminium, polycarbonat

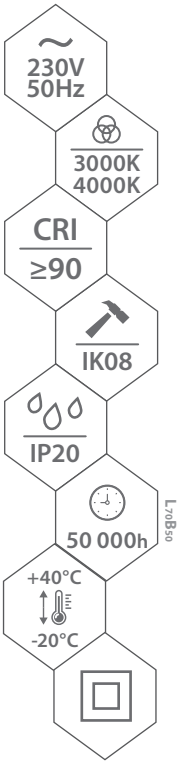



VSK-3F-040BL*

NEW

5 YEARS WARRANTY



VSK-3F-040WH

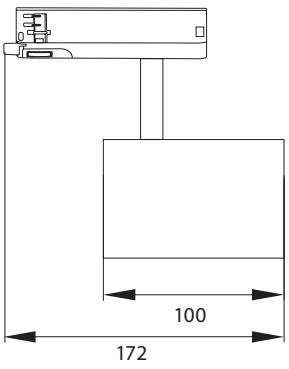







3-phase installation on busbars 4-wire



adapter with phase selector



light distribution angle 25° or 55°



adjustable handle



isolated power supply with an option of power reduction

BEMKO code	EAN	package	colour	colour temperature [K]	P maximum power of the source [W]	max luminous flux [lm]
C40-VSK-3F-040BL-3K	5900280989475	1/20	black	3000	12-40	4400
C40-VSK-3F-040BL-4K	5900280989482	1/20	black	4000	12-40	4400
C40-VSK-3F-040WH-3K	5900280989499	1/20	white	3000	12-40	4400
C40-VSK-3F-040WH-4K	5900280989505	1/20	white	4000	12-40	4400

* Photo of the spot on a dedicated busbar (available in the 'accessories' section).

3-PHASE SPOTLIGHT LUMINAIRE

STRAHLER 3P

MATERIAL ► aluminium alloy, cover: PC
MATERIAL ► aluminiumlegierung, schirm: PC

VRK VERKO 3F



VRK-3F-030WH



VRK-3F-030BL

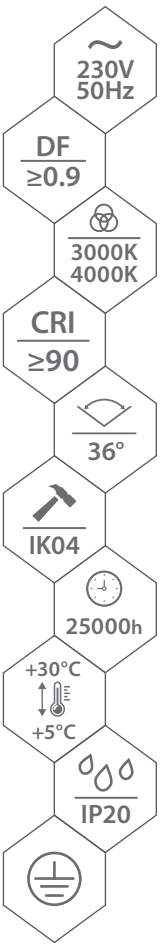

▶ VRK-3F-030

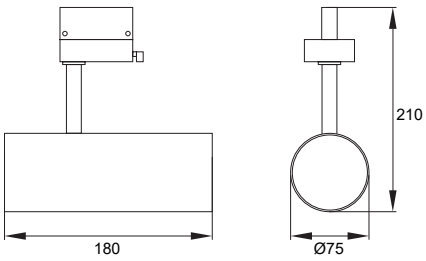



VRK-3F-GU10

▶ VRK-3F-GU10





focusing lens



connector allowing three groups of devices to work independently



connector lock



perforated case back



VRK-3F-GU10 mounting on 3-wire busbars

BEMKO code	EAN	package	colour	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C40-VRK-3F-030BL-3K	5900280944818	1/30	black	3000	30	2300
C40-VRK-3F-030BL-4K	5900280944825	1/30	black	4000	30	2400
C40-VRK-3F-030WH-3K	5900280944832	1/30	white	3000	30	2300
C40-VRK-3F-030WH-4K	5900280944849	1/30	white	4000	30	2400
C41-VRK-3F-GU10BL	5900280977977	1/20	black	-	1x GU10 35 W*	-
C41-VRK-3F-GU10WH	5900280977960	1/20	white	-	1x GU10 35 W*	-

* No light source included

SPOTLIGHT 3F – ACCESSORIES

STRAHLER 3P - ZUBEHÖR

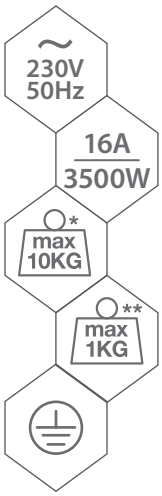

DALI



AS3



AS3-DS



AS3-LI



AS3-LO



AS3-LW

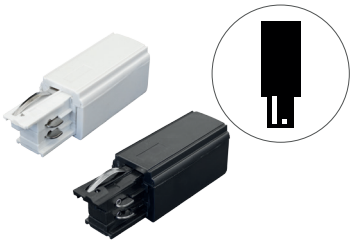

AS3-ZL

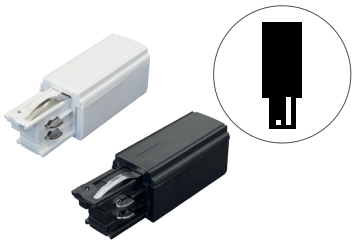

AS3-ZP

* Maximum busbar load: 10 kg
** Maximum spot load: 1 kg

code	EAN	colour	description
C40-AS3-05W	5900280928337	white	busbar 0.5 m
C40-AS3-05B	5900280928306	black	busbar 0.5 m
C40-AS3-10W	5900280928344	white	busbar 1.0 m
C40-AS3-10B	5900280928313	black	busbar 1.0 m
C40-AS3-15W	5900280928351	white	busbar 1.5 m
C40-AS3-15B	5900280928320	black	busbar 1.5 m
C40-AS3-20W	5900280927903	white	busbar 2.0 m
C40-AS3-20B	5900280927804	black	busbar 2.0 m
C40-AS3-DSW	5900280927941	white	bus cap
C40-AS3-DSB	5900280927859	black	bus cap
C40-AS3-LIW	5900280934741	white	90° inner connector
C40-AS3-LIB	5900280927828	black	90° inner connector
C40-AS3-LOW	5900280927927	white	90° outer connector
C40-AS3-LOB	5900280927835	black	90° outer connector
C40-AS3-LWW	5900280927934	white	inner connector
C40-AS3-LWB	5900280927842	black	inner connector
C40-AS3-ZLW	5900280927910	white	left connection unit
C40-AS3-ZLB	5900280934727	black	left connection unit
C40-AS3-ZPW	5900280934734	white	right connection unit
C40-AS3-ZPB	5900280927811	black	right connection unit

SPOTLIGHT 3F – ACCESSORIES

STRAHLER 3P - ZUBEHÖR



AS4-L



AS4-IZ



AS4-X

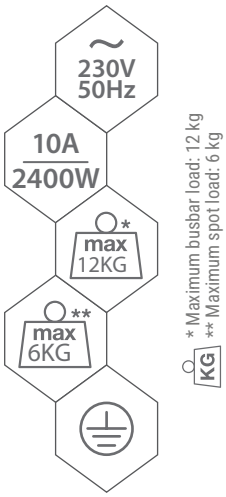



AS4-T



AS4-Z



AS4-I



AS4-C



AS4-F



AS4-ZML



AS4-10/20

code	EAN	package	colour	description
C40-AS4-10-BL	5902138402020	1/50	black	3-PHASE 4-WIRE BUSBAR 1.0 M BLACK
C40-AS4-10-WH	5902138402037	1/50	white	3-PHASE 4-WIRE BUSBAR 1.0 M WHITE
C40-AS4-20-BL	5902138402044	1/50	black	3-PHASE 4-WIRE BUSBAR 2.0 M BLACK
C40-AS4-20-WH	5902138402051	1/50	white	3-PHASE 4-WIRE BUSBAR 2.0 M WHITE
C40-AS4-Z-BL	5902138402082	1/50	black	3-PHASE BUSBAR POWER SUPPLY 4-WIRE BLACK
C40-AS4-Z-WH	5902138402099	1/50	white	3-PHASE BUSBAR POWER SUPPLY 4-WIRE WHITE
C40-AS4-C-BL	5902138402105	1/100	black	BUSBAR END CAP 3-PHASE 4-WIRE BLACK
C40-AS4-C-WH	5902138402112	1/100	white	BUSBAR END CAP 3-PHASE 4-WIRE WHITE
C40-AS4-I-BL	5902138402129	1/100	black	I-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR BLACK
C40-AS4-I-WH	5902138402136	1/100	white	I-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR WHITE
C40-AS4-IZ-BL	5902138402143	1/50	black	LINEAR POWER SUPPLY CONNECTOR FOR BUSBARS 3-PHASE 4-WIRE BLACK
C40-AS4-IZ-WH	5902138402150	1/50	white	LINEAR POWER SUPPLY CONNECTOR FOR BUSBARS 3-PHASE 4-WIRE WHITE
C40-AS4-L-BL	5902138402167	1/50	black	L-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR BLACK
C40-AS4-L-WH	5902138402174	1/50	white	L-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR WHITE
C40-AS4-X-BL	5902138402181	1/50	black	X-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR BLACK
C40-AS4-X-WH	5902138402198	1/50	white	X-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR WHITE
C40-AS4-T-BL	5902138402204	1/50	black	T-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR BLACK
C40-AS4-T-WH	5902138402211	1/50	white	T-CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR WHITE
C40-AS4-F-BL	5902138402068	1/50	black	FLEX CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR BLACK
C40-AS4-F-WH	5902138402075	1/50	white	FLEX CONNECTOR FOR 3-PHASE 4-WIRE BUSBAR WHITE
C40-AS4-ZML-15-BL	5902138402648	1/50	black	MOUNTING KIT 1.5 M STANDARD CABLE FOR BUSBAR 3-PHASE BLACK
C40-AS4-ZML-15-WH	5902138402655	1/50	white	MOUNTING KIT 1.5 M STANDARD CABE FOR BUSBAR 3 PHASE WHITE

OS1 STEPPER

LED TREPPENBELEUCHTUNG

MATERIAL ► steel, plastic
MATERIAL ► stahl, kunststof

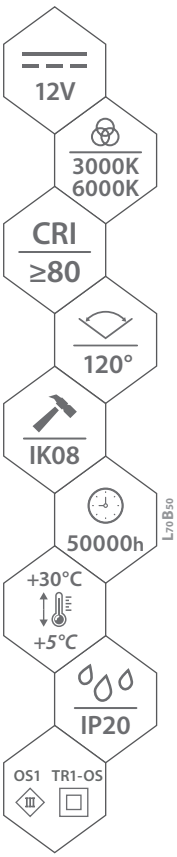



OS1-ST



OS1-WH



OS1-GR



OS1-CH





TR1-OS
power supply for stair luminaires



built-in LED light sources



quick connection of the luminaire to the power supply



connection cable of the luminaire



mounting catch



installation in a Ø60 junction box

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C47-OS1-ST3K	5900280932020	1/50	3000	1.2	40
C47-OS1-ST6K	5900280933102	1/50	6000	1.2	40
C47-OS1-GR3K	5900280932051	1/50	3000	1.2	40
C47-OS1-GR6K	5900280932068	1/50	6000	1.2	40
C47-OS1-WH3K	5900280932037	1/50	3000	1.2	40
C47-OS1-WH6K	5900280932044	1/50	6000	1.2	40
C47-OS1-CH3K	5900280932075	1/50	3000	1.2	40
C47-OS1-CH6K	5900280932082	1/50	6000	1.2	40
C47-TR1-OS	5900280932105	1/50	-	1.2	-

GU10 OVERRUN LUMINAIRE

BEMKO

BODENEINBAUSTRAHLER

OG DORYT

MATERIAL ► plastic, stainless steel, toughened glass
MATERIAL ► kunststof, rostfreier stahl, gehärtetes glas







OGR



OGS



OGN

►OGS





►OGR





►OGN







Dedicated light source
Dedicated light source
SLB-GU10



maximum load
2000 kg



brushed stainless steel



GU10 socket*



cable glands allowing
through-feeding



a cover to redirect
the beam to the area
around the luminaire

BEMKO code	EAN	package	P maximum power of the source [W] *
C42-OGR50	5908311364215	1/20	1x GU10 50 W
C42-OGS50	5908311364222	1/20	1x GU10 50 W
C42-OGN50	5900280945211	1/20	1x GU10 50 W

* No light source included

EL1 VALANT

LED FASSADENLEUCHTEN

MATERIAL ▶ aluminium alloy, cover: PC
MATERIAL ▶ aluminiumlegierung, schirm: PC

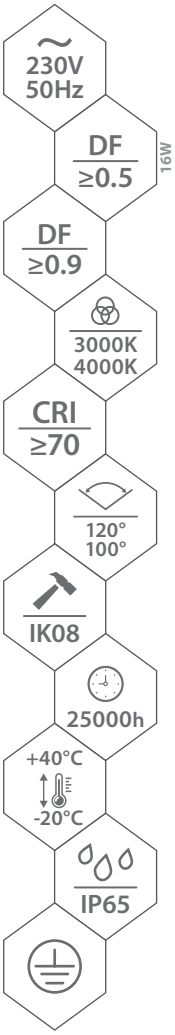



EL1-R-016GR



EL1-N-011GR



EL1-P-020GR

5 YEARS WARRANTY



EL1-O-010GR



EL1-N-009GR



EL1-K-007GR

▶ EL1-R-016GR



▶ EL1-N-011GR



▶ EL1-P-020GR



▶ EL1-O-010GR



▶ EL1-N-009GR



▶ EL1-K-007GR





LED light source



EL1-R-016GR
LEDs with lenses



cable gland



compact size



EL1-N-011GR
numbering included

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C25-EL1-K-007GR-3K	5900280936288	1/20	3000	8	560
C25-EL1-K-007GR-4K	5900280936271	1/20	4000	8	600
C25-EL1-O-010GR-3K	5900280936264	1/20	3000	10	800
C25-EL1-O-010GR-4K	5900280936257	1/20	4000	10	850
C25-EL1-N-009GR-3K	5900280968715	1/20	3000	9	650
C25-EL1-N-009GR-4K	5900280969187	1/20	4000	9	650
C25-EL1-N-011GR-3K	5900280936868	1/20	3000	11	880
C25-EL1-N-011GR-4K	5900280936875	1/20	4000	11	940
C25-EL1-R-016GR-3K	5900280936240	1/10	3000	16	1120
C25-EL1-R-016GR-4K	5900280936233	1/10	4000	16	1180
C25-EL1-P-020GR-3K	5900280936844	1/10	3000	20	1400
C25-EL1-P-020GR-4K	5900280936851	1/10	4000	20	1470

FAÇADE LED LUMINAIRE

LED FASSADENLEUCHTEN

MATERIAL ► aluminium alloy, cover: PC
MATERIAL ► aluminiumlegierung, schirm: PC

BEMKO

EL2 VALIT

5 YEARS WARRANTY



EL2-R-010GR



EL2-S-010GR



EL2-O-010GR



EL2-Q-008GR



EL2-K-2GU10-GR



EL2-KR-205GR



EL2-KS-205GR

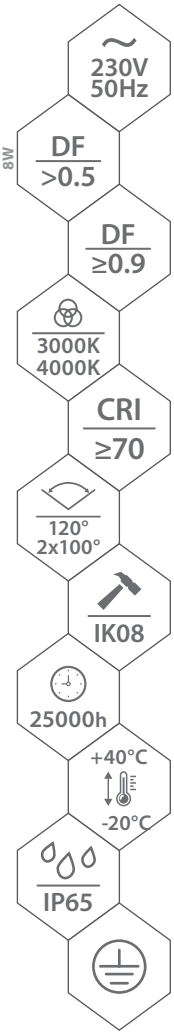

► EL2-R-010GR



► EL2-Q-008GR



► EL2-S-010GR



► EL2-K-2GU10-GR



► EL2-O-010GR





LED light source



cable glands



modern design



EL2-Q-008GR
mounting crossbar



EL2-K-2GU10-GR
two GU10 sockets*



EL2-KS / KR
lighting angle adjustment

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C25-EL2-K-2GU10-GR	5900280936219	1/20	-	max. 2x GU10 50 W*	-
C25-EL2-Q-008GR-3K	5900280934963	1/10	3000	8	640
C25-EL2-Q-008GR-4K	5900280934956	1/10	4000	8	680
C25-EL2-O-010GR-3K	5900280936202	1/10	3000	10	800
C25-EL2-O-010GR-4K	5900280936196	1/10	4000	10	850
C25-EL2-R-010GR-3K	5900280935007	1/10	3000	10	800
C25-EL2-R-010GR-4K	5900280934994	1/10	4000	10	850
C25-EL2-S-010GR-3K	5900280934987	1/10	3000	10	800
C25-EL2-S-010GR-4K	5900280934970	1/10	4000	10	850
C25-EL2-KR-205GR-4K	5900280962522	1/10	4000	12	1100
C25-EL2-KS-205GR-4K	5900280962515	1/10	4000	12	1100

* No light source included

LED STADIUM LUMINAIRE

STD2 STADIUM

LED-STADIONFLUTLICHT

MATERIAL ▶ aluminium alloy, PC
MATERIAL ▶ aluminiumlegierung, polycarbonat

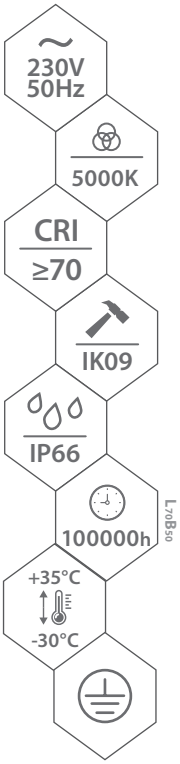

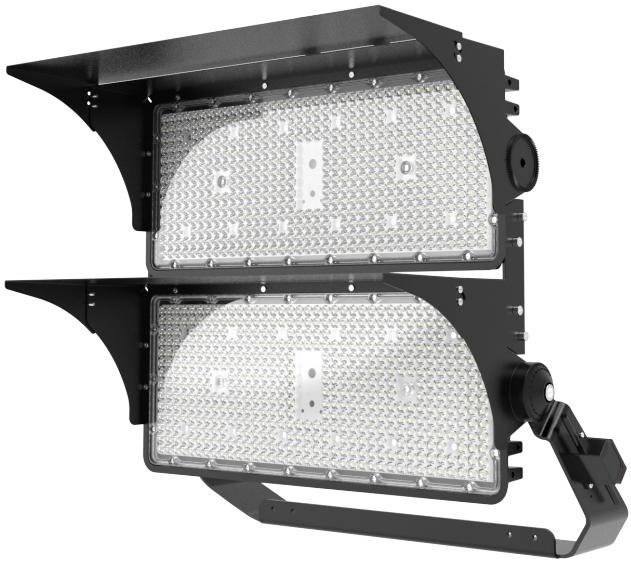

NEW

5 YEARS WARRANTY

STD2-S-1000BL-5K-6060 + 2x STD2-REF-R



STD2-REF-R



STD2-S-500BL-5K-6060



STD2-S-1000BL-5K-6060

▶ **STD2-S-500BL**

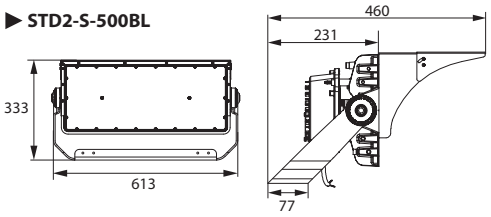

▶ **STD2-S-1000BL**

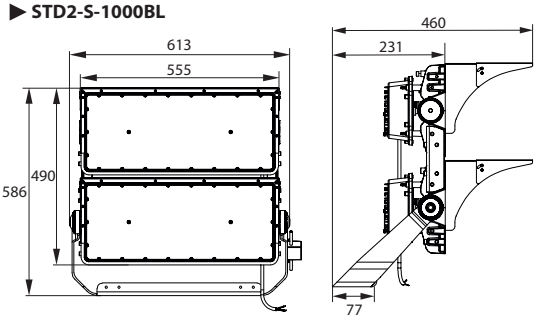



programmable and isolated power supply SOSEN



curved handle for easy installation



tightness degree: IP66



adjustable visor enables precise light targeting



additional 20 kV surge protector



dedicated laser sight

LUXMENA code	EAN	package	colour	colour temperature [K]	P maximum power of the source [W]	max luminous flux [lm]
C69-STD2-S-500BL-5K-6060	5900280990808	1	RAL 9017	5000	500	80000
C69-STD2-S-1000BL-5K-6060	5900280998774	1	RAL 9017	5000	1000	160,000
C69-STD2-REF-R	5900280990815	1	RAL 9017	ADJUSTABLE VISOR FOR STADIUM LUMINAIRES		
C69-STD-LAS	5900280998781	1	RAL 9017	LASER SIGHT FOR STADIUM LUMINAIRES		

LED FLOODLIGHT

LED LICHTFLUTER

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

LUXMENA BEMKO

LFC CAMPUS







170lm/W



LFC-060DG-4K



LFC-100DG-4K



LFC-030DG-4K

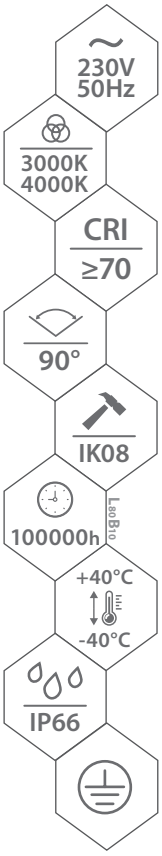



	a [mm]	b [mm]	c [mm]
LFC-030DG :	270	230	50
LFC-060DG:	320	224	50
LFC-100DG :	421	291	62
LFC-150DG:	421	291	62
LFC-200DG:	520	342	65
LFC-250DG :	520	342	65

Intended use:

- community sports fields
- sports halls
- logistic facilities
- outdoor industrial areas



optional T4 optics for 4K colour fixtures



high efficacy of luminaires: 170lm/W



cable length: 50 cm (±10%)



high heat dissipation efficacy



reliable INVETRONICS power supply



optional 3K light angles: 90x150 °, T4

LUXMENA code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C66-LFC-030DG-4K-9090	5900280959287	1/10	4000	30	5100
C66-LFC-060DG-3K-9090	5900280966902	1/6	3000	60	8400
C66-LFC-060DG-4K-9090	5900280959294	1/6	4000	60	10200
C66-LFC-100DG-3K-9090	5900280966919	1/4	3000	100	15,000
C66-LFC-100DG-4K-9090	5900280959300	1/4	4000	100	17,000
C66-LFC-150DG-3K-9090	5900280966926	1/4	3000	150	22,500
C66-LFC-150DG-4K-9090	5900280959317	1/4	4000	150	25,500
C66-LFC-200DG-3K-9090	5900280975812	1/2	3000	200	30,000
C66-LFC-200DG-4K-9090	5900280989413	1/2	4000	200	34,000
C66-LFC-250DG-3K-9090	5900280966933	1/2	3000	250	37,500
C66-LFC-250DG-4K-9090	5900280959324	1/2	4000	250	42,500

The warranty depends on operating conditions | up to 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

LFT TESSA

LED LICHTFLUTER CCT

MATERIAL ► aluminium, tempered glass

MATERIAL ► aluminum, gehärtetes glas

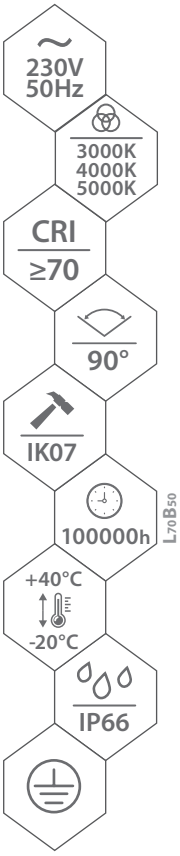



LFT-050BL



LFT-150BL

NEW









Power and colour temperature control



CCT- possibility to select the colour temperature



LFT-300BL

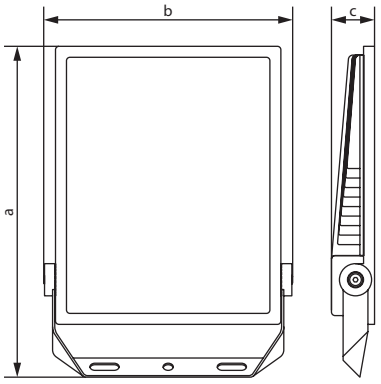

Model	a [mm]	b [mm]	c [mm]
LFT-050BL	283	195	53
LFT-100BL	360	245	56
LFT-150BL	343	294	59
LFT-200BL	411	294	59
LFT-300BL	475	344	59



option to customise distribution angles to individual needs



curved handle for easy installation



option to adjust power and colour temperature



tightness degree: IP66



high heat dissipation efficacy

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C66-LFT-050BL-CCT-9090	5902138400217	1/5	3000 / 4000 / 5000	50	7,500
C66-LFT-100BL-CCT-9090	5902138400224	1/5	3000 / 4000 / 5000	100	15,000
C66-LFT-150BL-CCT-9090	5902138400231	1/5	3000 / 4000 / 5000	150	22,500
C66-LFT-200BL-CCT-9090	5902138400248	1/5	3000 / 4000 / 5000	200	30,000
C66-LFT-300BL-CCT-9090	5902138400255	1/5	3000 / 4000 / 5000	300	45,000

The warranty depends on operating conditions | up to 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

LED CCT FLOODLIGHT

LED-FLUTLICHT CCT

ENCLOSURE MATERIAL, COVER MATERIAL ► aluminium, PC
GEHÄUSEMATERIAL, ABDECKUNG ► Aluminium, PC

LFP PRAJNA

NEW

2 YEARS WARRANTY

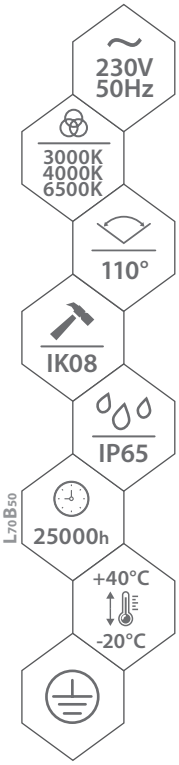



LFP-100



LFP-050



LFP-030



LFP-020



LFP-010



	a and [mm]	b [mm]	c [mm]
LFP-010	112	150	26
LFP-020	132	180	26
LFP-030	152	205	26
LFP-050	173	207	26
LFP-100	225	295	26



CCT- possibility to select the colour temperature



curved handle for easy installation



colour tempera-ture switch



airtight end cap



cover with directional lenses

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C64-LFP-010DG-CCT	5900280988126	1/40	3000 / 4000 / 6500	10	900
C64-LFP-020DG-CCT	5900280988133	1/40	3000 / 4000 / 6500	20	1800
C64-LFP-030DG-CCT	5900280988140	1/20	3000 / 4000 / 6500	30	2700
C64-LFP-050DG-CCT	5900280988157	1/20	3000 / 4000 / 6500	50	4500
C64-LFP-100DG-CCT	5900280988164	1/10	3000 / 4000 / 6500	100	9000

LED FLOODLIGHT

LFX

LED-FLUTLICHTSTRAHLER

MATERIAL ► plastic, aluminium
MATERIAL ►kunststoff, aluminium

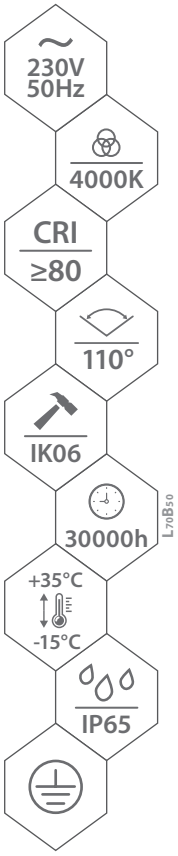



LFX-030WH



LFX-030BL

5 YEARS WARRANTY

	a [mm]	b [mm]	c [mm]
LFX-010-4K:	115	88	102
LFX-020-4K:	131	96	106
LFX-030-4K:	159	121	130
LFX-050-4K:	190	145	130







tool-free adjust-ment and electrical connection



IP68 hermetic gland



two enclosure colour versions

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C65-LFX-010BL-4K	5900280978271	1/20	4000	10	900
C65-LFX-010WH-4K	5900280978288	1/20	4000	10	900
C65-LFX-020BL-4K	5900280978295	1/20	4000	20	1800
C65-LFX-020WH-4K	5900280978301	1/20	4000	20	1800
C65-LFX-030BL-4K	5900280978318	1/10	4000	30	2700
C65-LFX-030WH-4K	5900280978325	1/10	4000	30	2700
C65-LFX-050BL-4K	5900280978332	1/10	4000	50	4500
C65-LFX-050WH-4K	5900280978349	1/10	4000	50	4500

LED FLOODLIGHT WITH MOTION SENSOR

LED-FLUTLICHTSTRAHLER SENSOR

MATERIAL ► plastic, aluminium
MATERIAL ► kunststoff, aluminium

LFX PIR





LFX-010BL-PIR



LFX-030WH-PIR



LFX-050BL-PIR

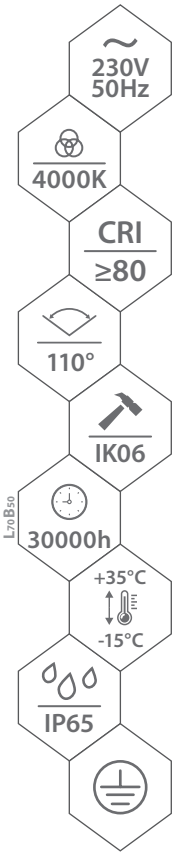

	a [mm]	b [mm]	c [mm]
LFX-010-4K-PIR:	115	121	113
LFX-020-4K-PIR:	131	128	113
LFX-030-4K-PIR:	159	154	133
LFX-050-4K-PIR:	190	178	133

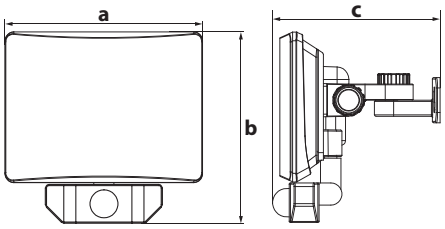



tool-free adjustment and electrical connection



IP68 hermetic gland



two enclosure colour versions



built-in infrared sensor

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C65-LFX-010BL-4K-PIR	5900280978356	1/20	4000	10	900
C65-LFX-010WH-4K-PIR	5900280978363	1/20	4000	10	900
C65-LFX-020BL-4K-PIR	5900280978370	1/20	4000	20	1800
C65-LFX-020WH-4K-PIR	5900280978387	1/20	4000	20	1800
C65-LFX-030BL-4K-PIR	5900280978394	1/10	4000	30	2700
C65-LFX-030WH-4K-PIR	5900280978400	1/10	4000	30	2700
C65-LFX-050BL-4K-PIR	5900280978417	1/10	4000	50	4500
C65-LFX-050WH-4K-PIR	5900280978424	1/10	4000	50	4500

LED FLOODLIGHT

LFK2 KASTEL

LED LICHTFLUTER

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

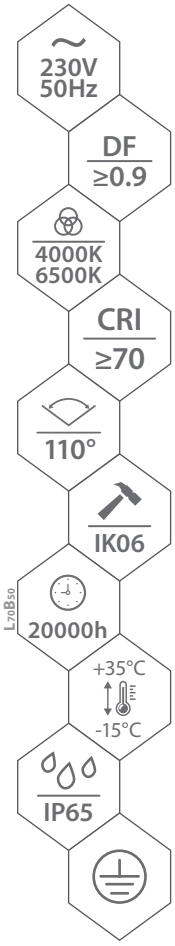



LFK2-030



LFK2-100



LFK2-010



frosted glass coating



easy installation of the luminaire without having to unscrew the bracket

	a [mm]	b [mm]	c [mm]
LFK2-010:	90	90	27
LFK2-020:	120	106	27
LFK2-030:	150	125	27
LFK2-050:	180	157	27
LFK2-100:	270	228	27
LFK2-150:	330	285	32.5
LFK2-200:	400	340	32.5

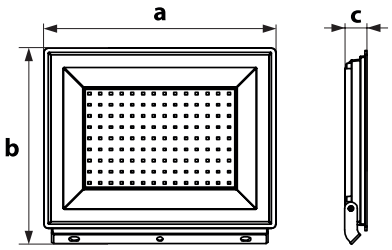

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	energy class
C64-LFK2-010BL-4K	5900280969880	1/60	4000	10	800	F
C64-LFK2-010BL-6K	5900280969897	1/60	6500	10	820	F
C64-LFK2-020BL-4K	5900280969903	1/40	4000	20	1640	F
C64-LFK2-020BL-6K	5900280969910	1/40	6500	20	1660	F
C64-LFK2-030BL-4K	5900280969927	1/30	4000	30	2520	F
C64-LFK2-030BL-6K	5900280969934	1/30	6500	30	2550	F
C64-LFK2-050BL-4K	5900280969941	1/20	4000	50	4280	F
C64-LFK2-050BL-6K	5900280969958	1/20	6500	50	4320	F
C64-LFK2-100BL-4K	5900280969965	1/5	4000	100	8720	F
C64-LFK2-100BL-6K	5900280969972	1/5	6500	100	8760	F
C64-LFK2-150BL-4K	5900280969989	1/5	4000	150	13,140	F
C64-LFK2-150BL-6K	5900280969996	1/5	6500	150	13,200	F
C64-LFK2-200BL-4K	5900280970008	1/5	4000	200	17,540	F
C64-LFK2-200BL-6K	5900280970015	1/5	6500	200	17,600	F

LED FLOODLIGHT WITH MOTION SENSOR

KAFLER BEMKO

LED LICHTFLUTER MIT BEWEGUNGSMELDER

S-LFK2 KASTEL

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

2 YEARS WARRANTY

~ 230V 50Hz
DF ≥0.9
4000K 6500K
CRI ≥70
110°
IK06
20000 h
L70B50
+35°C -15°C
IP65



S-LFK2-010



S-LFK2-020



S-LFK2-030



S-LFK2-050

	a [mm]	b [mm]	c [mm]
S-LFK2-010:	95	155	53
S-LFK2-020:	120	186	53
S-LFK2-030:	150	205	53
S-LFK2-050:	180	235	53





frosted glass coating



built-in PIR motion sensor



sensor adjustment



easy installation of the luminaire without having to unscrew the bracket

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	P_{sb} power in standby [W]	luminous flux [lm]	energy class
C64-S-LFK2-010BL-4K	5900280970022	1/20	4000	10	<0.5	800	F
C64-S-LFK2-010BL-6K	5900280970039	1/20	6500	10	<0.5	820	F
C64-S-LFK2-020BL-4K	5900280970046	1/20	4000	20	<0.5	1640	F
C64-S-LFK2-020BL-6K	5900280970053	1/20	6500	20	<0.5	1660	F
C64-S-LFK2-030BL-4K	5900280970060	1/10	4000	30	<0.5	2520	F
C64-S-LFK2-030BL-6K	5900280970077	1/10	6500	30	<0.5	2550	F
C64-S-LFK2-050BL-4K	5900280970084	1/10	4000	50	<0.5	4280	F
C64-S-LFK2-050BL-6K	5900280970091	1/10	6500	50	<0.5	4320	F

PORTABLE LED FLOODLIGHT

R-LFK2 KASTEL

TRAGBARE LED LICHTFLUTER

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

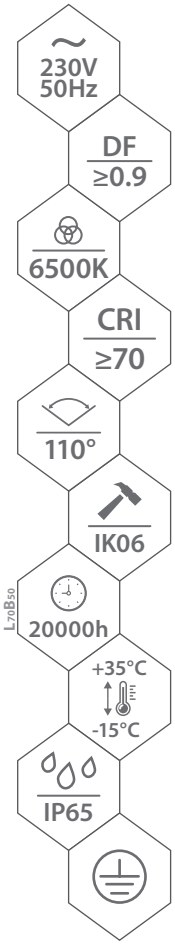



R-LFK2-050

2 YEARS WARRANTY

► R-LFK2-030

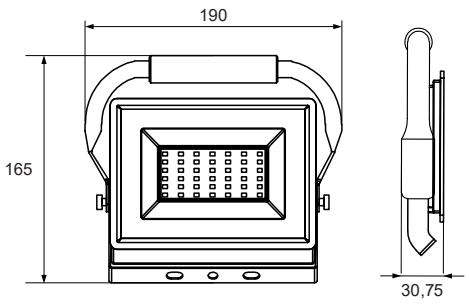

► R-LFK2-050

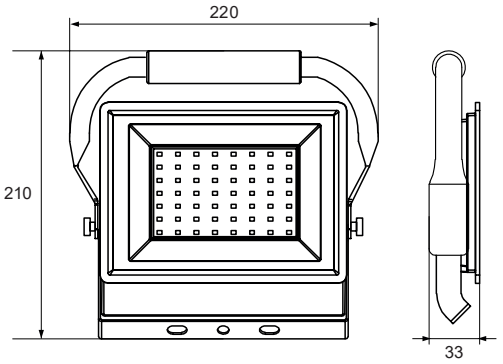



1.5 m cable with plug



frosted glass coating



comfortable handle



multifunctional use

KAFLER code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
C64-R-LFK2-030BL-6K	5900280970107	1/10	6500	30	2550	F
C64-R-LFK2-050BL-6K	5900280970114	1/10	6500	50	4320	F

TRIPOD

STATIV

MATERIAL ► steel, plastic
MATERIAL ► stahl, kunststof

NEW



TRIPOD-01



TRIPOD-02



TRIPOD-250

► TRIPOD-250

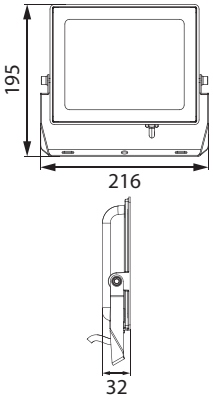



adjustable height



leg lock



cable length with plug: 1.5 m

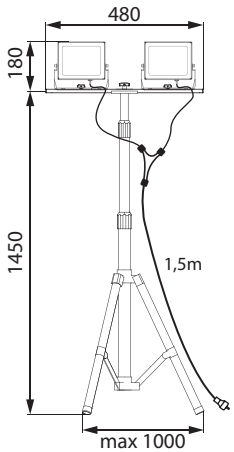

BEMKO code	EAN	package	mm height (min ÷ max)	KG maximum load [kg]
C52-TRIPOD-01	5900280921482	1/12	620 ÷1550	12
C52-TRIPOD-02	5900280909633	1/12	640 ÷1570	2 x 6

KAFLER code	EAN	package	mm height (min ÷ max)	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C52-TRIPOD-250-4K	5900280993762	1/6	1180÷ 1580	**4000**	100 (2x 50)	2x4700
C52-TRIPOD-250-6K	5900280993779	1/6	1180÷ 1580	**6500**	100 (2x50)	2x4700

LED STREET LUMINAIRE

AVN AVENUE

LED-STRASSENLEUCHTEN

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

~ 230V 50Hz
PF ≥0.98
CRI ≥70
150°x78°
IK08 IK09
100000h L90B10
+50°C -40°C
IP66



AVN-060

NEW

5 YEARS WARRANTY *

Lit by LUMILEDS

SOSEN LED DRIVER

ENEC 18

PLUS ENEC 18

ZHAGA Associate Member

POLISH PRODUCT QUALITY GUARANTEE

185lm/W

L90B10 100000h*



	a [mm]	b [mm]	c [mm]
AVN-025:	493	174	108
AVN-030:	493	174	108
AVN-040:	493	174	108
AVN-050:	493	174	108
AVN-060:	562	200	108
AVN-080:	562	200	108
AVN-100:	607	240	108
AVN-120:	607	240	108
AVN-150:	680	260	108

► mounting angle from -90° to +90°





tilt angle adjustment in any plane from -15° to +15°



luminaire equipped with a pressure equalisation filter



safety scissor-type voltage disconnector



installation on Ø48-Ø60 poles



tilt angle adjustment



isolated power supply SOSEN

LUXMENA code	supply system SOSEN	colour temperature [K]	P_{ON} power [W]	enclosure dimension [mm]
C82-AVN-030B0	SS-30GA-E62Bx	2700 / 3000 / 4000 / 5000 / 5700 / 6500	15 - 30	493x174x108
C82-AVN-050B0	SS-50GA-E62Bx		25 - 50	493x174x108
C82-AVN-080B0	SS-75GA-E62Bx		40 - 80	562x200x108
C82-AVN-100B0	SS-100GA-E62Bx		50 - 100	607x240x108
C82-AVN-150B0	SS-1500GA-E62Bx		75 - 150	680x260x108

*Warranty conditions can be extended.

LED STREET LUMINAIRE

LED-STRASSENLEUCHTEN

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

LUXMENA BEMKO

AVN AVENUE

NEW

5 YEARS WARRANTY *

INVENTRONIC

ZDI

DALI 2

ENEC 18

ENEC PLUS 18

ZHAGA Associate Member



POLISH PRODUCT QUALITY GUARANTEE

185lm/W

~ 230V 50Hz

PF ≥0.98

CRI ≥70

150°x78°

IK09

$L_{90}B_{10}$ 100000h

+50°C -40°C

IP66

► T2 S

► T2 M

► T3 M

► CW1

► CW2



6 mm toughened glass cover, IK09



reliable INVETRONICS power supply



ZHAGA socket as standard



double-chamber luminaire with tool-free enclosure opening



additional 10/20 kV surge protection

LUXMENA code	supply system DALI Invertronics	colour temperature [K]	P_{ON} power [W]	enclosure dimension [mm]
C82-AVN-025Z1	EBS-025SxxxBT2	2700 / 3000 / 4000 / 5000 / 5700 / 6500	12 - 25	493x174x108
C82-AVN-040Z1	EBS-040SxxxBT2		20 - 40	493x174x108
C82-AVN-080Z1	EBS-080SxxxBT2		40 - 80	562x200x108
C82-AVN-120Z1	EBS-120SxxxBT2		60 - 120	607x240x108

*Warranty conditions can be extended.

LED STREET LUMINAIRE

JAG3 JAGER

LED-STRASSENLEUCHTEN

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

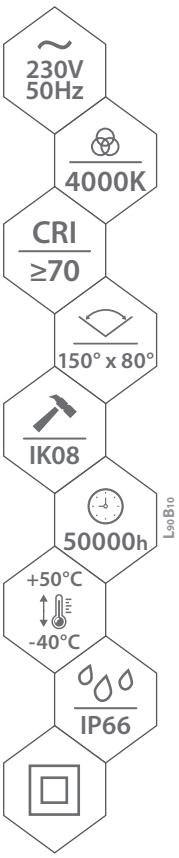



JAG3-080LG



JAG3-030LG,JAG3-050LG

NEW

5 YEARS WARRANTY

WATERPROOF

170lm/W



JAG3-100LG

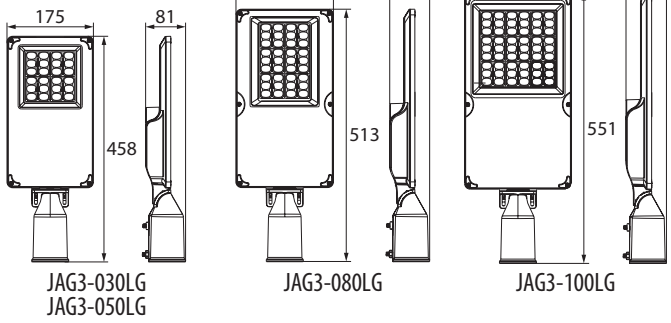

JAG3-030LG
JAG3-050LG

JAG3-080LG

JAG3-100LG

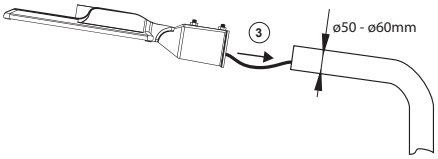

adjustment option
tilt angle:





IP66 rating



installation on
Ø50-Ø60 poles



adjustable tilt
angle +/- 15°



asymmetrical
light distribution
angle 150°x80°



SOSEN 1-10V isolated
power supply

BEMKO	EAN			P_{ON}	
code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C82-JAG3-030LG-II-4K	5900280993243	1	4000	30	4,950
C82-JAG3-050LG-II-4K	5900280993250	1	4000	50	8,250
C82-JAG3-080LG-II-4K	5900280993267	1	4000	80	13,200
C82-JAG3-100LG-II-4K	5900280993274	1	4000	100	16,500

LED STREET LUMINAIRE

LED STRAßENBELEUCHTUNG

MATERIAL ► aluminium alloy, plastic
MATERIAL ► aluminiumlegierung, plastik

JAZ JAZMIN

NEW

5 YEARS WARRANTY

WATERPROOF



JAZ-100LG



JAZ-100BL

230V 50Hz
4000K
CRI ≥70
140°x70°
IK08
50000h
+40°C -20°C
IP65

adjustment option
tilt angle:



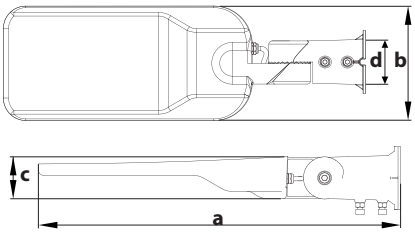

	a [mm]	b [mm]	c [mm]	d [mm]
JAZ-030:	416	138	105	ø60
JAZ-050:	470	149	105	ø60
JAZ-070:	470	149	105	ø60
JAZ-100:	567	179	105	ø60
JAZ-150:	633	203	105	ø60



directional lenticular matrices



installation on poles Ø50-Ø60mm



Optional wall installation



separated power supply



DS – built-in twilight sensor

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]
C82-JAZ-030LG-4K	5900280979384	1/4	4000	30	4,050
C82-JAZ-050LG-4K	5900280979391	1/4	4000	50	6,750
C82-JAZ-050LG-4K-DS	5900280983091	1/4	4000	50	6,750
C82-JAZ-050BL-4K	5900280991614	1/4	4000	50	6,750
C82-JAZ-070LG-4K	5900280983084	1/4	4000	70	9,100
C82-JAZ-070LG-4K-DS	5900280983107	1/4	4000	70	9,100
C82-JAZ-100LG-4K	5900280979407	1/2	4000	100	13,500
C82-JAZ-100LG-4K-DS	5900280983114	1/2	4000	100	13,500
C82-JAZ-100BL-4K	5900280991621	1/2	4000	100	13,500
C82-JAZ-150LG-4K	5900280979414	1/2	4000	150	20,250
C82-JAZ-150LG-4K-DS	5900280983121	1/2	4000	150	20,250
C82-JAZ-150BL-4K-DS	5900280991294	1	4000	150	20,250

LED PARKING LOT LUMINAIRE

LOP3 LOPER 3

LED-PARKPLATZBELEUCHTUNG

MATERIAL ► aluminium alloy, cover: PC
MATERIAL ► aluminiumlegierung, schirm: PC

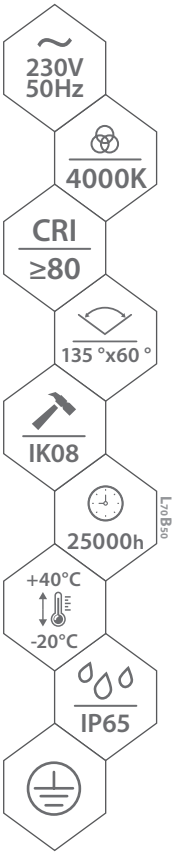

NEW

Lit by LUMILEDS







LOP3-100, LOP3-120



LOP3-050, LOP3-070

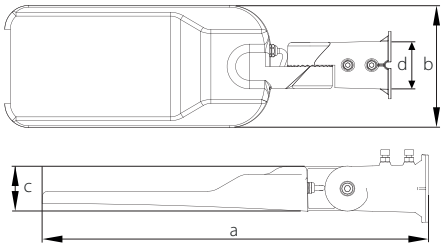

	a [mm]	b [mm]	c [mm]	d [mm]
LOP3-050:	412	139	92	ø60
LOP3-070:	412	139	92	ø60
LOP3-100:	488	183	92	ø60
LOP3-120:	488	183	92	ø60



power cord pre-installed in the enclosure



advanced mechanical strength



IP65 rating



adjustable adapter included



asymmetrical distribution angle 135°x60°

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]
C81-LOP3-050BL-4K	5900280988485	1	4000	50	6250
C81-LOP3-070BL-4K	5900280988492	1	4000	70	8750
C81-LOP3-100BL-4K	5900280988508	1	4000	100	12500
C81-LOP3-120BL-4K	5900280988515	1	4000	120	15000

*The warranty depends on operating conditions | max. 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

LED PARK LUMINAIRE

PARKLEUCHTEN

MATERIAL ► aluminium alloy, toughened glass
MATERIAL ► aluminiumlegierung, gehärtetes glas

PRK IBERIS

NEW

170lm/W

SOSEN LED DRIVER







PRK-01A

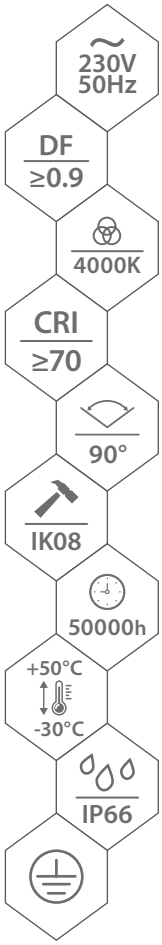

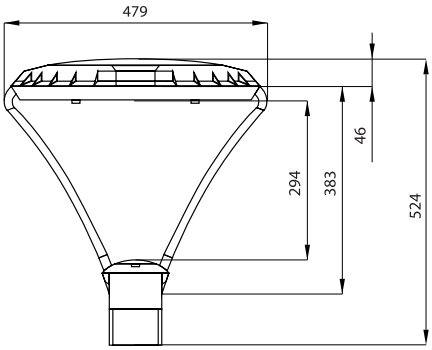


diodes with lenses


aluminium enclosure


installation on poles Ø60-76mm


RAL 7016 colour


stainless steel screws


programmable power supply SOSEN

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	maximum pole diameter [mm]
C80-PRK-01A-030-4K	5900280993045	1	4000	30	5000	Ø60÷Ø76
C80-PRK-01A-050-4K	5900280993052	1	4000	50	8250	Ø60÷Ø76

*The warranty depends on operating conditions | max. 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

FOLDING LIGHT POLE

SSO

FALTBARER LICHTMAST

MATERIAL ► Q235 galvanised steel
MATERIAL ► verzinkter Stahl Q235

max 10KG

NEW



SSO-S3M-1



SSO-A1M-DG/BL



SSO-AKF-160











inspection hatch
78x200 mm



end cap for
a pole end



steel expansion
anchors included
16x120 mm



grey option

SSO-S3M-160-060-DG

BEMKO code	EAN	package	colour	description
C84-SSO-S3M-160-060-DG	5900280992901	1	grey	FOLDING LIGHT POLE 3 M 160X160 MM FI60 MM GREY
C84-SSO-S3M-160-060-BL	5900280992895	1	black	FOLDING LIGHT POLE 3 M 160X160 MM FI60 MM BLACK
C84-SSO-A1M-DG	5900280992925	1/9	grey	1 M EXTENSION FOR SSO FOLDING LIGHT POLE GRAY
C84-SSO-A1M-BL	5900280992918	1/9	black	1 M EXTENSION FOR SSO FOLDING LIGHT POLE BLACK
C84-SSO-AKF-160	5900280992932	1/10	stainless steel	FOUNDATION ANCHOR FOR LIGHT POLE 160X160 MM

ACCESSORIES FOR LED STREET LUMINAIRES

LED-STRASSENLEUCHTEN - ZUBEHÖR

MATERIAL ► aluminium alloy
MATERIAL ► aluminiumlegierung



KUL1-5060-AD

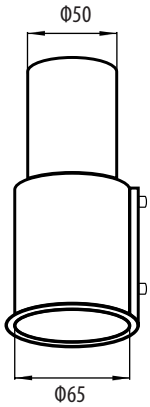



KUL1-50-UR





KUL1-60-UR



installation on poles
Ø60

code	EAN	package	colour	description
C82-KUL1-5060-AD	5900280920010	1/25	black	MOUNTING ADAPTER FI50 mm LAMPS TO FI60 mm POLES BLACK
C82-KUL1-50-UR	5900280920003	1/20	black	ADJUSTABLE HANDLE FOR FI50 mm LUMINAIRES ON POLES WITH FI60 mm BLACK
C82-KUL1-60-UR	5900280919991	1/20	black	ADJUSTABLE HANDLE FOR FI60 mm LUMINAIRES ON POLES WITH FI60 mm BLACK

LED SOLAR HYBRID STREET LUMINAIRE

SOH

HYBRID-SOLAR-LED-STRASSENLEUCHTE

ENCLOSURE MATERIAL ► ABS enclosure, PC cover
MATERIAL ►ABS, PC

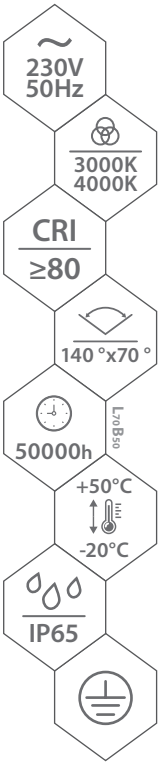



SOH-040

SOH-SPIKE

NEW

5 YEARS WARRANTY

CCT- possibility to select the colour temperature

165lm/W



Smart microprocessor-based energy management system

The luminaire is equipped with an smart microprocessor-based energy management system through automatic selection of power source (mains or solar) and brightness.

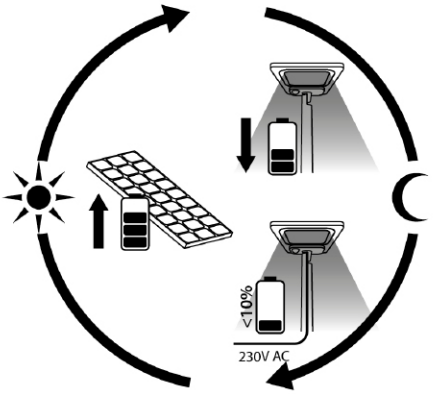





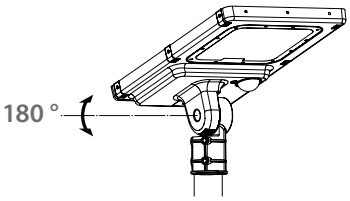

adjustment option tilt angle:



two operation modes: permanent light mode and PIR sensor mode



LEDs with high light output



SOH-SPIKE optional accessory bird spikes



light output adjustable with a controller (controller included)



mounting to Φ60 mm diameter poles



high-performance LiFePO4 12,000 mAh battery pack



high efficacy of luminaires: 165lm/W

LUXMENA code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	power supply type
C83-SOH-040-CCT-PIR	5900280998903	1	3000 / 4000	40	6600	mains & solar
C83-SOH-SPIKE	5900280998927	1	BIRD SPIKES FOR SOH HYBRID LUMINAIRES			

LED SOLAR STREET LUMINAIRE

SOLAR-STRAßENLEUCHTE LED

ENCLOSURE MATERIAL ► enclosure: ABS, cover PC
MATERIAL ►ABS, PC

SOG SOLGER

NEW

3 YEARS WARRANTY

CCT- possibility to select the colour temperature



SOG-015BL-4K-PIR



SOG-040BL-4K-PIR

4000K
140°x70°
35000h
+50°C
-15°C
IP65
AUTO ON/OFF
EASY TO INSTALL

SOG-015BL

IR up to 8 m 120°

SOG-040BL

IR up to 12 m 120°

► SOG-015BL / 020BL /025BL



► SOG-040BL

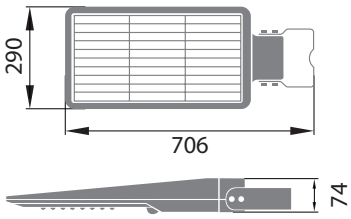

adjustment option tilt angle:





LEDs with lenses with a lighting angle of 140°x70°



high quality monocrys-talline silicon solar panel



PIR motion sensor



three mounting options



SOG-040BL remote control included

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	battery
C83-SOG-015BL-4K-PIR	5900280972859	1/4	4000	15	1600	Li-ion 7.4V/5400mAh
C83-SOG-020BL-CCT-PIR	5902138402280	1/8	3000 / 4000 / 6000	20	3000	Li-ion 7.4V/5400mAh
C83-SOG-025BL-4K-PIR	5900280985903	1/8	4000	25	3000	LiFePO4 6.4V/6000mAh
C83-SOG-040BL-4K-PIR	5900280972866	1	4000	40	6000	LiFePO4 12.8V/6000mAh

LED SOLAR PARK LUMINAIRE

SOM SOLUM

SOLAR-PARKENLEUCHTE LED

ENCLOSURE MATERIAL ► enclosure: ABS, cover PC
MATERIAL ► ABS, PC

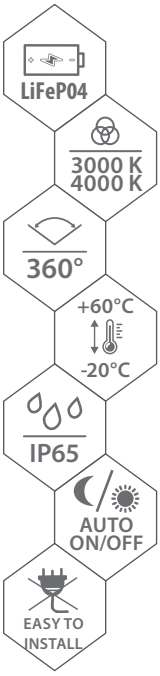

NEW

5 YEARS WARRANTY



SOM-020BL







Intelligent working time

The luminaire switches on automatically when darkness falls, with power adjusted to the battery charge level for optimum working time.



CCT- possibility to select the colour temperature



opal diffuser



high quality monocrystalline silicon solar panel



replaceable LiFePO4 6000 mAh, 6.4 V battery



on/off button



installation on pole Ø50-60

BEMKO	EAN			P		
code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	power supply type
C83-SOM-020BL-CCT	5900280992406	1	3000 / 4000	20	2200	solar

LED SOLAR FLOODLIGHT

LICHTFLUTER LED

ENCLOSURE MATERIAL ► enclosure: ABS, cover PC
MATERIAL ► ABS, PC

SOP SOLPAR

NEW

5 YEARS WARRANTY

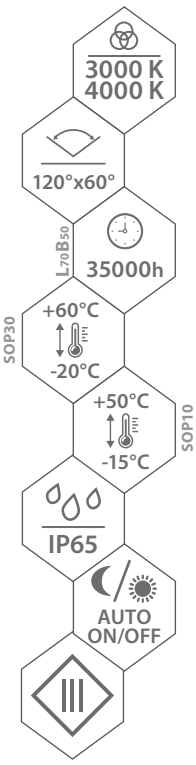

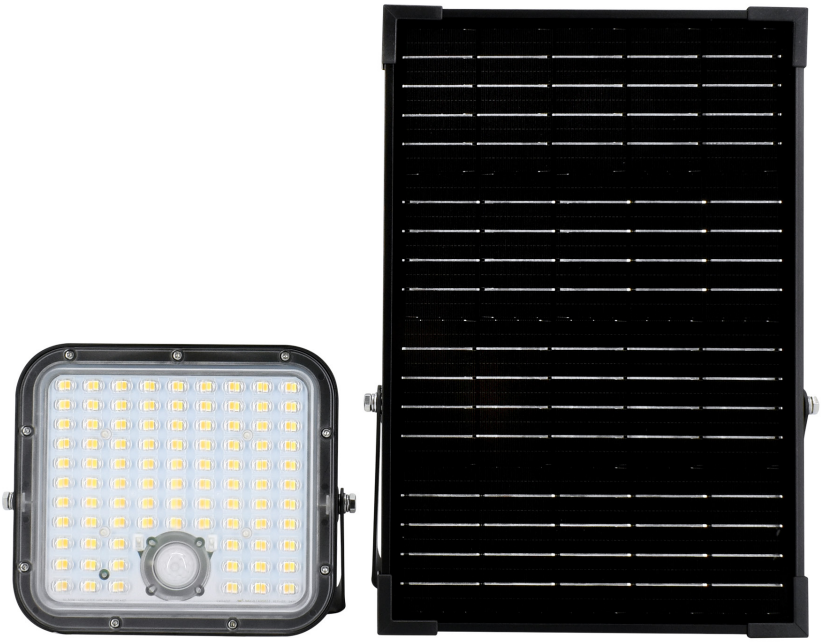

SOP-030BL

► SOP-030



CCT- possibility to select the colour temperature

2 modes

- Sensor mode
- Permanent lighting mode



LEDs with lenses



high quality monocrys-talline silicon solar panel



built-in PIR motion and twilight sensor detection range: 6 m



SOP – 5 m cable



SOP – remote control included

code	EAN	package	colour temperature [K]	photovoltaic panel power [W]	luminous flux [lm]	battery
C83-SOP-010BL-4K-PIR	5900280985880	1/12	4000	10	1500	Li-ion 3.7 V / 3600 mAh
C83-SOP-010BL-CCT-PIR	5902138402297	1/12	3000 / 4000	10	1500	Li-ion 3.7 V / 3600 mAh
C83-SOP-030BL-CCT-PIR	5900280992390	1/8	3000 / 4000	30	4800	LiFePO4 6.4V / 6000mAh

SON SOLEN, SOK SOKER

LICHTFLUTER LED

ENCLOSURE MATERIAL ▶ enclosure: ABS, cover PC
MATERIAL ▶ ABS, PC

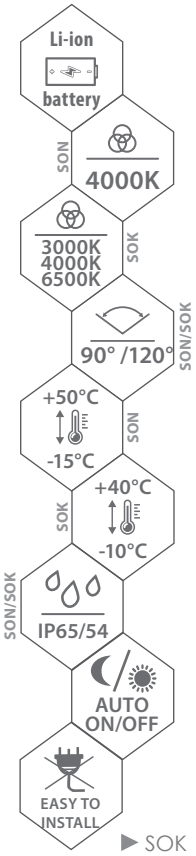

▶ SOK



SON

NEW

*

5 YEARS WARRANTY

**

2 YEARS WARRANTY



SOK

SOK: 4 sensor modes

- Mode 1: 100% for 18 s
- Mode 2: 100% for 18 s, then 30-50 lm
- Mode 3: 30-50lm
- Mode 4: sleep mode

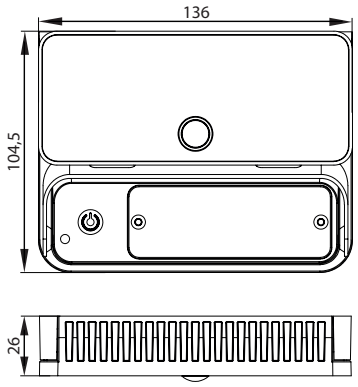

▶ SON

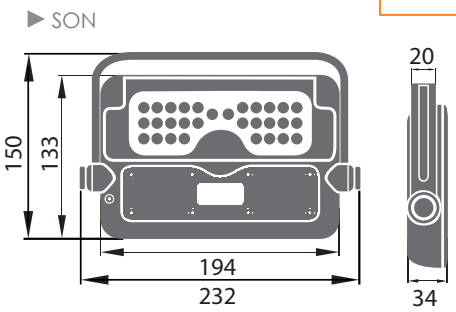



CCT- possibility to select the colour temperature



high quality monocrys-talline silicon solar panel



removable battery Li-ion 3000 mAh 3.7 V in SON and 2000 mAh 3.7 V in SOK



built-in PIR motion and twilight sensor detection range: 6 m (SON) and 5 m (SOK)



wall-mounted option



tilt angle adjustment



SOK: switch CCT colour temperature

BEMKO code	EAN	package	colour temperature [K]	P power [W]	luminous flux [lm]	power supply type
C83-SON-005BL-4K-PIR	5900280972842	1/18	4000	5	500	solar
C83-SON-007BL-CCT-PIR	5902138402617	1	3000 / 4000	7	700	solar

KAFLER code	EAN	package	colour temperature [K]	P power [W]	luminous flux [lm]	power supply type
C83-SOK-008BL-CCT-PIR	5900280997340	1/20	3000 / 4000 / 6500	8	1000	solar

*Warranty for SON luminaire / **Warranty for SOK luminaire

LED SOLAR FLOODLIGHT

LICHTFLUTER LED

ENCLOSURE MATERIAL ► enclosure: ABS, cover PC
MATERIAL ► ABS, PC

SOT TRINGO

NEW

5 YEARS WARRANTY

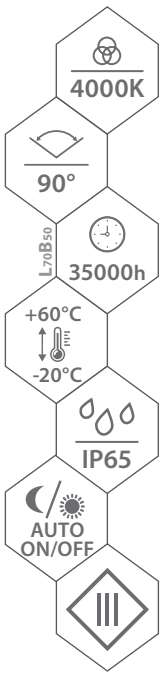



SOT

► SOT



2 modes

- Sensor mode
- Permanent lighting mode



LEDs with lenses



built-in PIR motion and twilight sensor detection range: 6 m



additional facade illumination in a warm colour

code	EAN	package	colour temperature [K]	photovoltaic panel power [W]	luminous flux [lm]	battery
C83-SOT-001BL-PIR	5900280985873	1/8	4000	1.5	220	Li-ion 3.7V / 1200mAh

LED HIGH-BAY LUMINAIRE

HBU3 ULTRAS 3

HIGHBAY LICHT LED

MATERIAL ► aluminium alloy, PC
MATERIAL ► aluminiumlegierung, PC

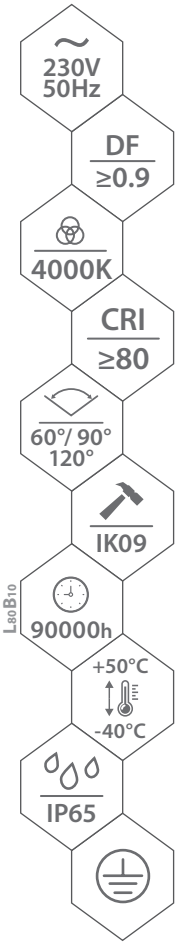



HBU3

Lit by LUMILEDS

WARRANTY 3 YEARS 24h

WARRANTY 5 YEARS 12h

200lm/W

PHILIPS 1-10V

Przełącznik zmiany mocy

	100	150	200
1 LOW	80W	90W	120W
2 MID	**100W**	120W	160W
3 HIGH	120W	**150W**	**200W**

	a [mm]	b [mm]
HBU3-100:	Ø273	121
HBU3-150:	Ø308	126
HBU3-200:	Ø349	126

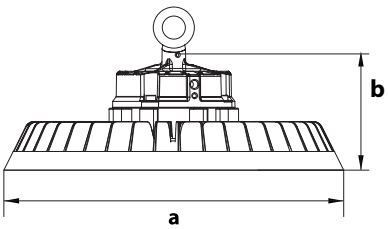



Optional
frames for wall mounting
Optional brackets for wall montage
C85-UM-HB-M10



PHILIPS high-performance light source LUMILEDS



interchangeable lenses 60 ° / 90 ° / 120 °



high heat dissipation efficacy



steel safety cable included



PHILIPS Xitanium power supply with control 1-10 V and power control



cable length: 30 cm (±10%)

LUXMENA code	EAN	package	colour temperature [K]	CRI colour rendering index	P_{ON} power [W]	luminous flux [lm] (performance)
C85-HBU3-100W-840-090BL	5900280966353	1	4000	≥80	100	19,000 (190lm/W)
C85-HBU3-150W-840-090BL	5900280966360	1	4000	≥80	150	28,500 (190lm/W)
C85-HBU3-200W-840-090BL	5900280966377	1	4000	≥80	200	38 000 (185lm/W)
C851-SSNET-100	5900280975768	1/20		PROTECTIVE NET FOR HIGHBAY LED HBU3 100 W		
C851-SSNET-150	5900280975775	1/20		PROTECTIVE NET FOR HIGHBAY LED HBU3 150 W		
C851-SSNET-200	5900280975782	1/20		PROTECTIVE NET FOR HIGHBAY LED HBU3 200 W		

*The warranty depends on operating conditions | max. 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

LED HIGH-BAY LUMINAIRE

HIGHBAY LICHT LED

MATERIAL ► aluminium alloy, PC
MATERIAL ► aluminiumlegierung, PC

HBP3 PARIT 3



HBP3

230V 50Hz
DF ≥0.9
4000K
CRI ≥80
90°/120°
IK08
60000h
+75°C -40°C
IP65

160lm/W

DALI

MS / RF instruction
MS / RF manual

	a [mm]	b [mm]
HBP3-100A:	Ø235	110
HBP3-100D:	Ø270	115
HBP3-150:	Ø270	115
HBP3-200:	Ø305	115
HBP3-240:	Ø340	122





Optional
frames for wall mounting
Optional brackets for wall montage
C85-UM-HB-M10


interchangeable lens 120° / 90°


heat sink to dissipate heat


M10 bracket for pendant mounting


engraved rating plate


external power supply with 0-10 V or DALI control



certificate of the National Institute of Hygiene

code	EAN	package	colour temperature [K]	power [W]	luminous flux (performance)	LED flux
C85-HBP3-100D-090BL	5900280968029	1	4,000	100	16 000lm (160lm/W)	19 100lm
C85-HBP3-150D-090BL	5900280968036	1	4,000	150	24 000lm (160lm/W)	28 600lm
C85-HBP3-200D-090BL	5900280968043	1	4,000	200	32 000lm (160lm/W)	38 100lm
C85-HBP3-240D-090BL	5900280968050	1	4,000	240	38 400lm (155lm/W)	45 700lm
C85-HBP3-100A-120BL	5900280963505	1	4,000	100	16 000lm (160lm/W)	19 100lm
C85-HBP3-150A-120BL	5900280963512	1	4,000	150	24 000lm (160lm/W)	28 600lm
C85-HBP3-200A-120BL	5900280963529	1	4,000	200	32 000lm (160lm/W)	38 100lm
C85-HBP3-240A-120BL	5900280963536	1	4,000	240	38 400lm (155lm/W)	45 700lm
C85-MS-HBP3	5900280975690	1	MICROWAVE MOTION AND TWILIGHT SENSOR FOR HBP3-xxxA LUMINAIRES			
C85-RF-HBP3	5900280975706	1	RF REMOTE CONTROL FOR HBP3-xxxA LUMINAIRES WITH MICROWAVE MOTION SENSOR			

*The warranty depends on operating conditions | max. 12 h/day – 5-year warranty, 24 h/day – 3-year warranty

HBV3 VOYAGER

HIGHBAY LICHT LED

MATERIAL ► aluminium alloy, PC

MATERIAL ► aluminiumlegierung, PC

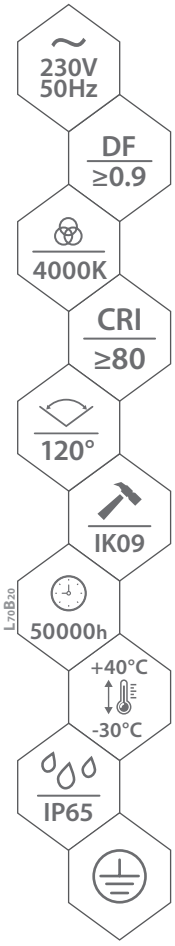

NEW

5 YEARS WARRANTY

WARRANTY 5 YEARS 12h



HBV3

► HBV3-100



► HBV3-150



► HBV3-200





Optional handle frames for wall mounting

Optional bracket for wall montage

C85-UM-HB-M10



high-efficacy light sources in energy class C



replaceable lenses 120°



reliable power supply SOSEN



M10 bracket for pendant mounting



cable length: 50 cm (±10%)

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	beam angle
C85-HBV3-100-4K-120BL	5900280993441	1	4000	100	14,000	120 °
C85-HBV3-150-4K-120BL	5900280993458	1	4000	150	21,000	120 °
C85-HBV3-200-4K-120BL	5900280993465	1	4000	200	28,000	120 °

LED HIGH-BAY LUMINAIRE

KAFLER BEMKO

HIGHBAY LICHT LED

HBG GAMPER

MATERIAL ► aluminium alloy, PC
MATERIAL ► aluminiumlegierung, PC

2 YEARS WARRANTY



HBG

~ 230V 50Hz
4000K
CRI ≥80
90°
IK08
50000h
+40°C -20°C
IP65

► HBG-100W



► HBG-150W



► HBG-200W





Optional
frames for wall mounting
Optional brackets for wall montage
C85-UM-HB-M10



light source with increased durability



enclosure with heat sink to dissipate heat



M10 bracket for pendant mounting

KAFLER code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm] (performance)	beam angle
C85-HBG-100W-840-090DG	5900280983558	1/10	4000	100	10,000 (100lm/W)	90 °
C85-HBG-150W-840-090DG	5900280983565	1/10	4000	150	15,000 (100lm/W)	90 °
C85-HBG-200W-840-090DG	5900280983572	1/10	4000	200	20,000 (100lm/W)	90 °

MOUNTING BRACKETS FOR HIGH BAY

UM

HIGH BAY-MONTAGEHALTERUNGEN

MATERIAL ► stainless steel

MATERIAL ►edelstahl



UM-HB-M10





UM-HBP3



code	EAN	description	compatible luminaires
C85-UM-HB-M10	5900280982735	VERSATILE SURFACE-MOUNTING BRACKET WITH M10 HOLE	HBV2, HBP3, HBU2, HBG
C85-UM-HBP3-100	5900280975713	MOUNTING BRACKET FOR HBP3 LUMINAIRE 100W	HBP3-100
C85-UM-HBP3-150	5900280975720	MOUNTING BRACKET FOR HBP3 LUMINAIRE 150W	HBP3-150
C85-UM-HBP3-200	5900280975737	MOUNTING BRACKET FOR HBP3 LUMINAIRE 200W	HBP3-200
C85-UM-HBP3-240	5900280975744	MOUNTING BRACKET FOR HBP3 LUMINAIRE 240W	HBP3-240

LED HIGH-BAY LUMINAIRE

LUXMENA BEMKO

HIGHBAY LICHT LED

HBM MASTER

MATERIAL ► aluminium alloy, cover: PC
MATERIAL ► aluminiumlegierung, lampenschirm: PC

NEW

IP66 WATERPROOF

5 YEARS WARRANTY



HBM-120



HBM-060

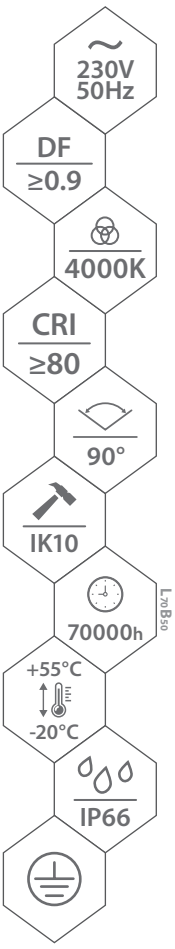



high-quality OSRAM diodes



high heat dissipation efficacy



reliable TRIDONIC power supply



simple luminaire connection



optional lighting angles: 15 °, 60 °, 30x70 °, 120 °



4 installation options: parallel, pendant, surface-mounted, rotary

LUXMENA code	EAN	colour temperature [K]	number of LED modules	P_{ON} power [W]	luminous flux [lm]
C85-HBM-S2A-046B-840B-C00-9090	5900280979551	4000	2	46	7,600
C85-HBM-S3A-069B-840B-C00-9090	5900280979568	4000	3	69	11,400
C85-HBM-S4A-092B-840B-C00-9090	5900280979575	4000	4	92	15,200
C85-HBM-S6A-138B-840B-C00-9090	5900280979582	4000	6	138	22,800
C85-HBM-S8A-184B-840B-C00-9090	5900280979599	4000	8	184	30,400
C85-HBM-P2A-060B-840B-C00-9090	5900280979605	4000	2	60	10,700
C85-HBM-P3A-090B-840B-C00-9090	5900280979612	4000	3	90	16,050
C85-HBM-P4A-120B-840B-C00-9090	5900280979629	4000	4	120	21,400
C85-HBM-P6A-180B-840B-C00-9090	5900280979636	4000	6	180	32,050
C85-HBM-P8A-240B-840B-C00-9090	5900280979643	4000	8	240	42,750

*Subject to specific warranty conditions

MULTIFUNCTION LED FLASHLIGHT

LTW09

MULTIFUNKTIONS-LED TASCHENLAMPE

MATERIAL ► aluminium, nylon, magnet

MATERIAL ► aluminium, nylon, magnet



NEW





LTW09

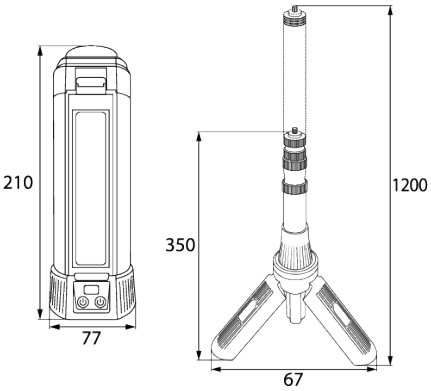

5 light modes

- 100% cold light
- 50% cold light
- 100% warm light
- 50% warm light
- 100% neutral light



flashlight equipped with a magnet and cord



3 colour temperature options 3000, 4000, 6500 K



foldable enclosure parts



possibility of tripod mounting (included in the set)

code	EAN	package	colour temperature [K]	power [W]	battery	luminous flux [lm]
C49-LTW09	5900280999160	1/10	3000 / 4000 / 6500	max. 20W	Li-ion 3.7 V / 6000 mAh	2000lm

MULTIFUNCTION LED FLASHLIGHT

MULTIFUNKTIONELLE LED-TASCHENLAMPE

LTW06, LTW07, LTW08

	LTW06	LTW07	LTW08
MATERIAL ►	aluminium aloy, ABS	aluminium alloy	aluminium alloy, ABS, PC
MATERIAL ►	aluminiumlegierung, ABS	aluminiumlegierung	aluminiumlegierung, ABS, PC



NEW



LTW07



LTW08



LTW06



5 light modes

- 100% light mode
- 50% light mode
- 25% light mode
- Red light
- Flashing red light

7 light modes

- 100% light mode
- 75% light mode
- 50% light mode
- 25% light mode
- Red light (side light)
- Cool light (side light)
- Red and blue light (side light)

6 light modes

- Strong white light
- Faint white light
- Strong yellow light
- Faint yellow light
- Red light
- Flashing red light



LTW08
adjustment option
colour temperature



LTW08
handle with magnet



LTW08
option to mount
the flashlight on a tripod



LTW06
with a magnet and
a bottle opener



LTW07
charging with
USB-C port



LTW07
battery level indicator

BEMKO code	EAN	package	battery	luminous flux [lm]
C49-LTW06	5900280977397	1/32	Li-ion 3.7 V / 400 mAh	max. 670
C49-LTW07	5900280985484	1/40	Li-ion 3.7 V / 1000 mAh	max. 330
C49-LTW08	5900280994363	1/12	Li-ion 3.7V / 1200mAh	max. 500

HYBRID LED ZOOM FLASHLIGHT

LTK01

HYBRID-LED-ZOOM-TASCHENLAMPE

MATERIAL ► aluminium alloy, ABS
MATERIAL ► aluminiumlegierung, ABS



NEW

3 YEARS WARRANTY


LTK01



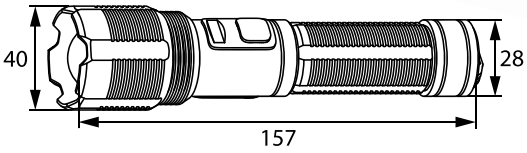

5 light modes

- 100% light
- 50% light
- 25% light
- strobe light
- warning light








colour rendering
battery level


charging with
USB-C port


"ZOOM" function

code	EAN	package	colour temperature [K]	power [W]	battery	luminous flux [lm]
C49-LTK01	5900280999177	1/50	6500	max 10 W	Li-ion 3.7V / 1200mAh	max 600 lm



EMERGENCY LUMINAIRES

NOTLEUCHTEN

SURFACE-MOUNTED EMERGENCY LUMINAIRE

SKL SKALER - R

NOTLEUCHTE

MATERIAL ▶ PC

MATERIAL ▶ PC

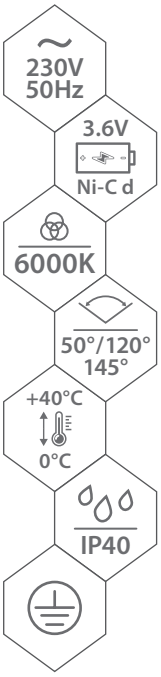



SKL-R

2 YEARS WARRANTY

POLISH PRODUCT QUALITY GUARANTEE

RAL
Full range
of enclosure colours
Full colour palette

AUTOTEST SYSTEM





SKL-R-BL



145°/ 55° SC – corridor lens



50° SO – converging lens



120° SX – no lens



housing made of polycarbonate

CNBOP-PIB

Certificate of Approval No. 3856/2019

LUXMENA code	EAN	lens type	P_{ON} power [W]	type / working time
C91-SKL-R-3SC-AT1H-CNBOP	5900280978806	SC	3	autotest / 1h
C91-SKL-R-3SC-AT2H-CNBOP	5900280978745	SC	3	autotest / 2h
C91-SKL-R-3SC-AT3H-CNBOP	5900280939579	SC	3	autotest / 3h
C91-SKL-R-3SC-AW1H-CNBOP	5900280978868	SC	3	manual test / 1 h
C91-SKL-R-3SO-AT1H-CNBOP	5900280978820	SO	3	autotest / 1h
C91-SKL-R-3SO-AT2H-CNBOP	5900280978769	SO	3	autotest / 2h
C91-SKL-R-3SO-AT3H-CNBOP	5900280939586	SO	3	autotest / 3h
C91-SKL-R-3SO-AW1H-CNBOP	5900280978882	SO	3	manual test / 1 h
C91-SKL-R-3SX-AT1H-CNBOP	5900280978813	SX	3	autotest / 1h
C91-SKL-R-3SX-AT2H-CNBOP	5900280978752	SX	3	autotest / 2h
C91-SKL-R-3SX-AT3H-CNBOP	5900280939593	SX	3	autotest / 3h
C91-SKL-R-3SX-AW1H-CNBOP	5900280978875	SX	3	manual test / 1 h

SURFACE-MOUNTED EMERGENCY LUMINAIRE

NOTLEUCHTE

MATERIAL ► PC

MATERIAL ► PC

SKL SKALER - S

2 YEARS WARRANTY

POLISH PRODUCT QUALITY GUARANTEE

RAL Full range of enclosure colours Full colour palette

AUTOTEST SYSTEM



SKL-S

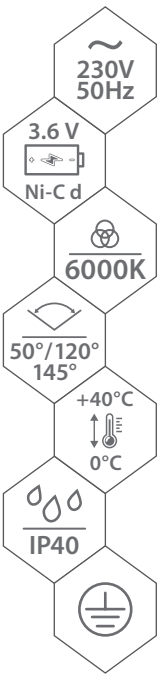





SKL-S-BL



145°/ 55° SC – corridor lens



50° SO – converging lens



120° SX – no lens



housing made of polycarbonate

CNBOP-PIB

Certificate of Approval No. 3856/2019

LUXMENA code	EAN	lens type	P_{ON} power [W]	type / working time
C91-SKL-S-3SC-AT1H-CNBOP	5900280978776	SC	3	autotest / 1h
C91-SKL-S-3SC-AT2H-CNBOP	5900280978714	SC	3	autotest / 2h
C91-SKL-S-3SC-AT3H-CNBOP	5900280939548	SC	3	autotest / 3h
C91-SKL-S-3SC-AW1H-CNBOP	5900280978837	SC	3	manual test / 1 h
C91-SKL-S-3SO-AT1H-CNBOP	5900280978790	SO	3	autotest / 1h
C91-SKL-S-3SO-AT2H-CNBOP	5900280978738	SO	3	autotest / 2h
C91-SKL-S-3SO-AT3H-CNBOP	5900280939555	SO	3	autotest / 3h
C91-SKL-S-3SO-AW1H-CNBOP	5900280978851	SO	3	manual test / 1 h
C91-SKL-S-3SX-AT1H-CNBOP	5900280978783	SX	3	autotest / 1h
C91-SKL-S-3SX-AT2H-CNBOP	5900280978721	SX	3	autotest / 2h
C91-SKL-S-3SX-AT3H-CNBOP	5900280939562	SX	3	autotest / 3h
C91-SKL-S-3SX-AW1H-CNBOP	5900280978844	SX	3	manual test / 1 h

FLUSH-MOUNTED EMERGENCY LUMINAIRE

TLR TOLER

NOTLEUCHTE

MATERIAL ► aluminium alloy, PC
MATERIAL ► aluminiumlegierung, PC

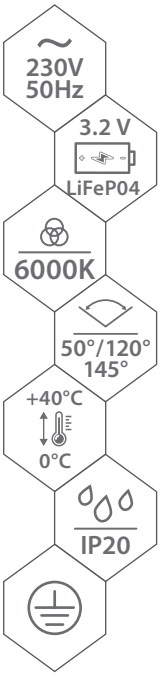



TLR

2 YEARS WARRANTY

POLISH PRODUCT QUALITY GUARANTEE

AUTOTEST SYSTEM







145°/ 55° SC – corridor lens



50° SO – converging lens



120° SX – no lens



built-in power supply



enclosure made of polycarbonate and aluminium

CNBOP-PIB

Certificate of Approval No. 4064/2020

LUXMENA code	EAN	package	lens type	P_{ON} power in on-mode power [W]	battery capacity [mAh]
C91-TLR-3SC-AT2H-CNBOP	5900280952721	1	SC	3	1500
C91-TLR-3SO-AT2H-CNBOP	5900280952745	1	SO	3	1500
C91-TLR-3SX-AT2H-CNBOP	5900280952769	1	SX	3	1500
C91-TLR-3SC-AT3H-CNBOP	5900280952738	1	SC	3	3000
C91-TLR-3SO-AT3H-CNBOP	5900280952752	1	SO	3	3000
C91-TLR-3SX-AT3H-CNBOP	5900280952776	1	SX	3	3000

EMERGENCY LUMINAIRE

NOTLEUCHTE

MATERIAL ► PC

MATERIAL ► PC

GLR GALER

2 YEARS WARRANTY

AVAILABLE PICTOGRAMS:



POLISH PRODUCT QUALITY GUARANTEE

AUTOTEST SYSTEM



GLR-3ZP-AT3H



GLR-3ZP-MT3H

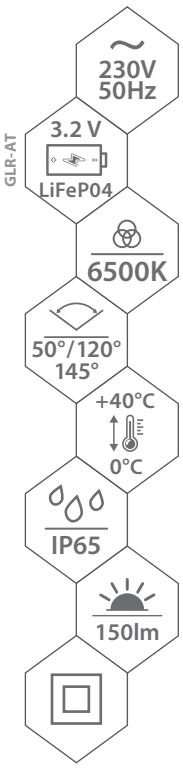

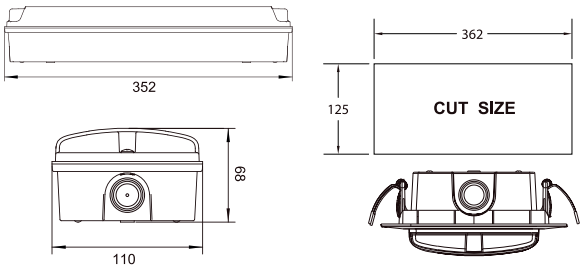



2 modes:
NM - emergency
M – network and
emergency mode



TEST control button



duration of operation in emergency mode >3 h



flush-mounting kit available



certificate of approval no. 4814/2022



3 pictograms included

code	EAN	package	emergency mode operation time [h]	power [W]	dimensions
C90-GLR-3ZP-MT3H-CNBOP	5900280968098	1/12	> 3	3.5	352 x 110 x 68 mm
C90-GLR-3ZP-AT3H-CNBOP	5900280972828	1/12	> 3	3.5	352 x 110 x 68 mm
C90-GLR-PKT-EXT	5900280965745	-	"EXIT" PICTOGRAM		-
C90-GLR-PKT-ZMP	5900280965752	-	MOUNTING KIT – FLUSH-MOUNTING		362 x 125 mm (mounting hole)

MLR2 MALER 2

NOTLEUCHTE

MATERIAL ► PC, ACRYLIC

MATERIAL ► PC, ACRYL

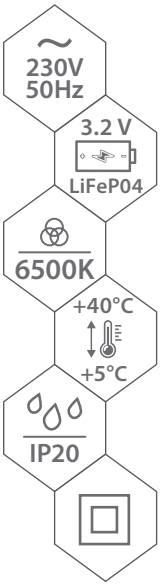



POLISH PRODUCT QUALITY GUARANTEE

AUTOTEST SYSTEM

AVAILABLE PICTOGRAMS:

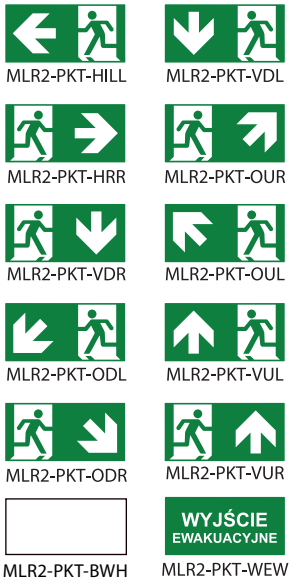



MOUNTING KIT ZDW



MOUNTING KIT ZMF

MOUNTING KIT ZMN



MOUNTING KIT ZMP



MOUNTING KIT ZMN



self-test function



operation modes:
A – emergency mode
SA – network and emergency mode



battery: 3.2 V
LiFePO4 1500 mAh

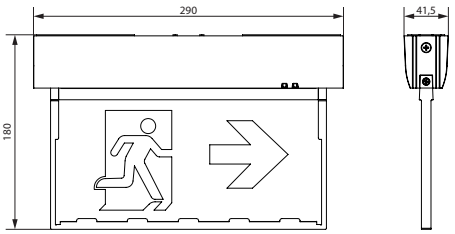

LUXMENA code	EAN	package	emergency mode operation time [h]	P_{ON} power in mains mode / emergency mode [W]	dimensions
C91-MLR2-4NT-AT3H-CNBOP	5902138400835	1/12	3	4.6 / 1.3	290x180x41.5 mm
C91-MLR2-ZDW-WH	5902138400996	MOUNTING KIT MALER 2 HANDLE WHITE			
C91-MLR2-ZMF-WH	5902138400972	WALL MOUNTING KIT MALER 2 FLAG WHITE			
C91-MLR2-ZMN-WH	5902138400965	WALL MOUNTING MALER 2 KIT WHITE			
C91-MLR2-ZMP-WH	5902138400989	FLUSH MOUNTING MALER 2 KIT WHITE			
C91-MLR-ZML-B05	5900280953926	MOUNTING KIT MALER STANDARD CORD 0.5 M			

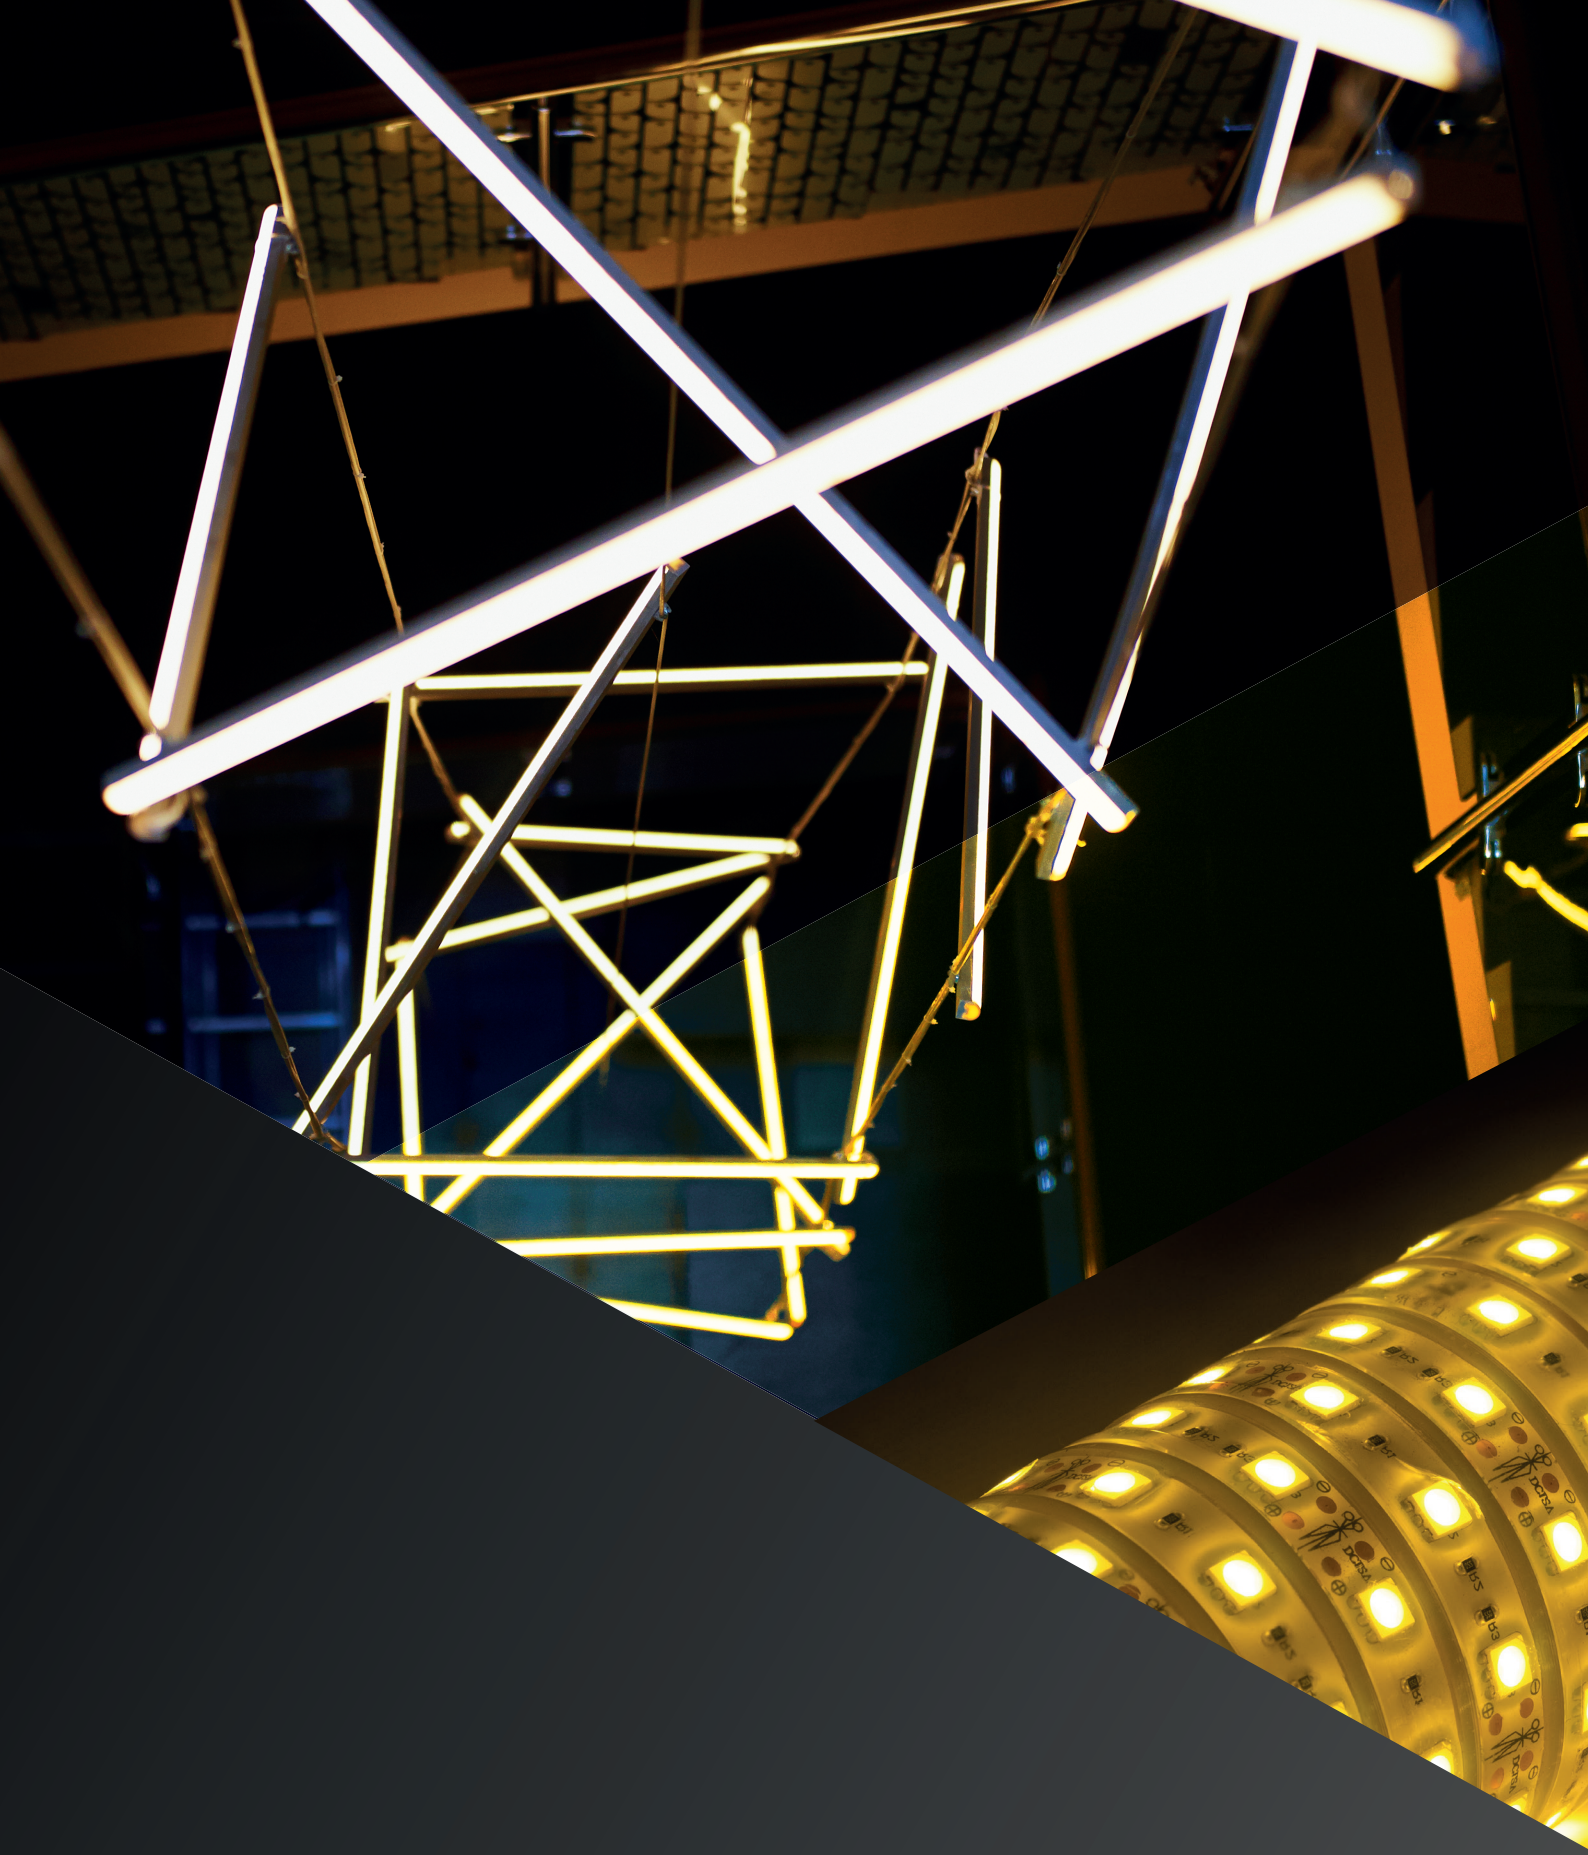

LIGHT SOURCES

LICHTQUELLE

LED TUBE WITH INCREASED EFFICACY

HL-T8-LED

LED-TUBE HOCH LUMEN

230V 50Hz
T8-LED G13
CRI ≥80
240°
$L_{70}B_{50}$ 50000h
+40°C -10°C
IP20

3 YEARS WARRANTY *

FLICKER FREE

160lm/W



4000K
neutral colour

6000K
cold colour



single-sided power supply


G13 end cap


opal diffuser


LEDs with increased luminous efficacy



length of LED tube

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	energy class
D89-HL-T8-LED060-ZJM-4K	5900280918543	25	4000	9	1440	C
D89-HL-T8-LED060-ZJM-6K	5900280929167	25	6000	9	1440	C
D89-HL-T8-LED120-ZJM-4K	5900280929174	25	4000	18	2880	C
D89-HL-T8-LED120-ZJM-6K	5900280929181	25	6000	18	2880	C
D89-HL-T8-LED150-ZJM-4K	5900280932013	25	4000	22	3520	C
D89-HL-T8-LED150-ZJM-6K	5900280912886	25	6000	22	3520	C

* Depending on operating conditions: 3-year warranty even with 12 h/day operation.

LED TUBE

LED-TUBE

T8-LED

*





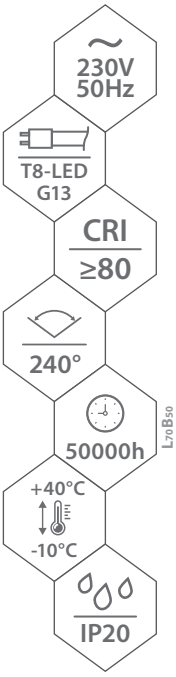



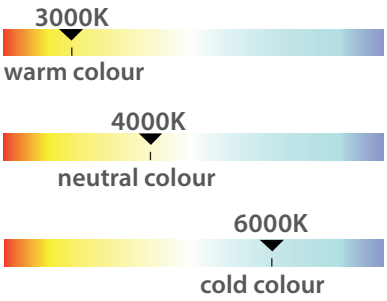



single-sided power supply



G13 end cap



opal diffuser



secure packaging



length of LED tube

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	energy class
D89-T8-LED060-ZJM-3K-25	5900280930965	25	3000	9	920	F
D89-T8-LED060-ZJM-4K-25	5900280904935	25	4000	9	920	F
D89-T8-LED060-ZJM-6K -25	5900280914071	25	6000	9	920	F
D89-T8-LED120-ZJM-3K-25	5900280930989	25	3000	18	1850	F
D89-T8-LED120-ZJM-4K-25	5900280904942	25	4000	18	1850	F
D89-T8-LED120-ZJM-6K-25	5900280914095	25	6000	18	1850	F
D89-T8-LED150-ZJM-3K-25	5900280931009	25	3000	22	2350	F
D89-T8-LED150-ZJM-4K-25	5900280913319	25	4000	22	2350	F
D89-T8-LED150-ZJM-6K-25	5900280914118	25	6000	22	2350	F

*Depending on operating conditions: 3-year warranty even with 12 h/day operation.

LIGHT SOURCE – FILAMENT LED INSIDE

FLB-E14

FILAMENT-LED-LICHTQUELLE

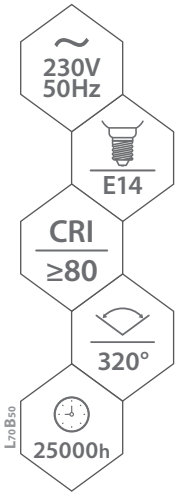











▶ FLB-E14-C35 ▶ FLB-E14-G45

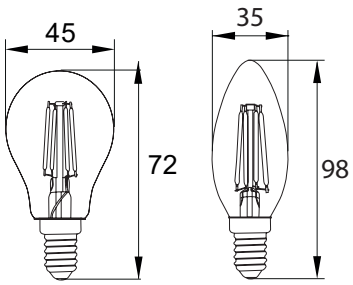



E14 end cap



bubble made of glass



wide angle of light distribution 320°

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
D86-FLB-E14-C35-040-2K	5900280973771	1/100	2700	4	440	E
D86-FLB-E14-C35-040-4K	5900280973788	1/100	4000	4	470	E
D86-FLB-E14-C35-060-2K	5900280973658	1/100	2700	6	700	E
D86-FLB-E14-C35-060-4K	5900280973665	1/100	4000	6	750	E
D86-FLB-E14-G45-060-2K	5900280988409	1/100	2700	6	700	E
D86-FLB-E14-G45-060-4K	5900280988416	1/100	4000	6	750	E

LIGHT SOURCE – FILAMENT LED INSIDE

FILAMENT-LED-LICHTQUELLE

FLB-E27

3 YEARS WARRANTY

FLICKER FREE

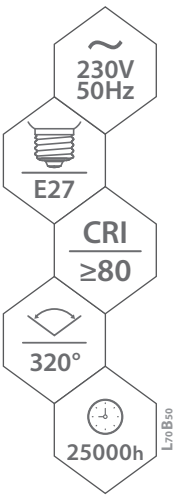



▶FLB-E27-A70



▶FLB-E27-A60







E27 end cap



bubble made of glass



wide angle of light distribution 320°

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
D86-FLB-E27-A60-075-2K	5900280973696	1/100	2700	7.5	950	E
D86-FLB-E27-A60-075-4K	5900280973702	1/100	4000	7.5	1055	D
D86-FLB-E27-A60-120-2K	5900280973719	1/100	2700	12	1600	E
D86-FLB-E27-A60-120-4K	5900280973726	1/100	4000	12	1700	D
D86-FLB-E27-A70-160-2K	5900280973733	1/50	2700	16	2400	D
D86-FLB-E27-A70-160-4K	5900280973740	1/50	4000	16	2500	D

LIGHT SOURCE – FILAMENT LED INSIDE

FLB-E27

FILAMENT-LED-LICHTQUELLE

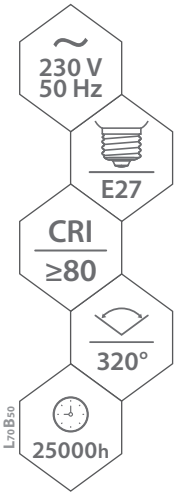









2700K
warm colour

4000K
neutral colour

▶ FLB-E27-C35



▶ FLB-E27-G45



BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	energy class
D86-FLB-E27-C35-060-2K	5900280988386	1/100	2700	6	700	E
D86-FLB-E27-C35-060-4K	5900280988393	1/100	4000	6	750	E
D86-FLB-E27-G45-040-2K	5900280974013	1/100	2700	4	440	E
D86-FLB-E27-G45-040-4K	5900280974020	1/100	4000	4	470	E
D86-FLB-E27-G45-060-2K	5900280973672	1/100	2700	6	700	E
D86-FLB-E27-G45-060-4K	5900280973689	1/100	4000	6	750	E

LIGHT SOURCE – FILAMENT LED INSIDE

FILAMENT-LED-LICHTQUELLE

FLB-E27

3 YEARS WARRANTY

FLICKER FREE

~ 230 V 50 Hz

E27

CRI ≥80

320°

25000h L70B50



▶FLB-E27-ST64



▶FLB-E27-G95



▶FLB-E27-G125

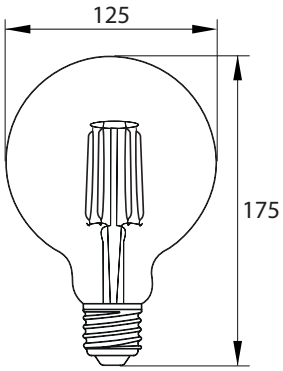



BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	energy class
D86-FLB-E27-G95-110-2K	5900280974037	1/50	2700	11	1500	D
D86-FLB-E27-G95-110-4K	5900280974044	1/50	4000	11	1550	D
D86-FLB-E27-G125-110-2K	5900280974051	1/20	2700	11	1500	D
D86-FLB-E27-G125-110-4K	5900280974068	1/20	4000	11	1550	D
D86-FLB-E27-ST64-070-2K	5900280973757	1/50	2700	7	950	D
D86-FLB-E27-ST64-070-4K	5900280973764	1/50	4000	7	1055	D

LIGHT SOURCE – SAMSUNG LED INSIDE

SLB-E14

LED-LICHTQUELLE

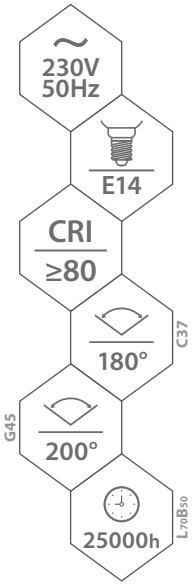



SLB-E14-C45



SLB-E14-G45

3 YEARS WARRANTY

FLICKER FREE

3000K
warm colour

4000K
neutral colour

6500K
cold colour

SAMSUNG LED inside

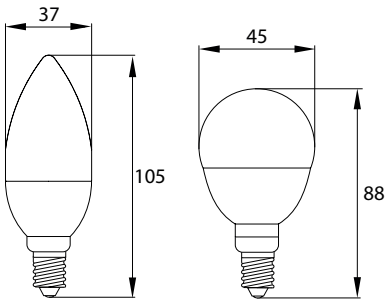



E14 end cap



body and plastic cover



milky cover

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
D84-SLB-E14-C37-075-3K	5900280949479	1/10/100	3000	7.5	720	F
D84-SLB-E14-C37-075-4K	5900280949486	1/10/100	4000	7.5	740	F
D84-SLB-E14-C37-075-6K	5900280969293	1/10/100	6500	7.5	740	F
D84-SLB-E14-G45-075-3K	5900280949493	1/10/100	3000	7.5	720	F
D84-SLB-E14-G45-075-4K	5900280949509	1/10/100	4000	7.5	740	F
D84-SLB-E14-G45-075-6K	5900280969309	1/10/100	6500	7.5	740	F

LIGHT SOURCE – SAMSUNG LED INSIDE

LED-LICHTQUELLE

SLB-E27

3 YEARS WARRANTY

FLICKER FREE



SLB-E27-G45



SLB-E27-A60

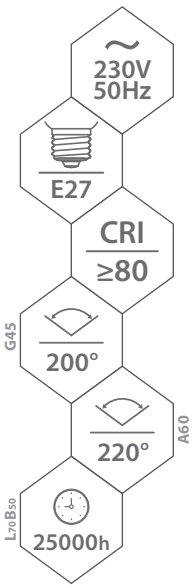

▶ E27-G45



▶ E27-A60-095



▶ E27-A60-110





SAMSUNG LED inside



E27 end cap



body and plastic cover



milky cover

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	EEI energy class
D84-SLB-E27-G45-075-3K	5900280949554	1/10/100	3000	7.5	720	F
D84-SLB-E27-G45-075-4K	5900280949561	1/10/100	4000	7.5	740	F
D84-SLB-E27-G45-075-6K	5900280969330	1/10/100	6500	7.5	760	F
D84-SLB-E27-A60-095-3K	5900280949516	1/10/100	3000	9.5	880	F
D84-SLB-E27-A60-095-4K	5900280949523	1/10/100	4000	9.5	900	F
D84-SLB-E27-A60-095-6K	5900280969316	1/10/100	6500	9.5	900	F
D84-SLB-E27-A60-110-3K	5900280949530	1/10/100	3000	11	1055	F
D84-SLB-E27-A60-110-4K	5900280949547	1/10/100	4000	11	1090	F
D84-SLB-E27-A60-110-6K	5900280969323	1/10/100	6500	11	1090	F
D84-SLB-E27-A65-200-3K	5900280971890	1/10/100	3000	20	2300	E
D84-SLB-E27-A65-200-4K	5900280971906	1/10/100	4000	20	2400	E
D84-SLB-E27-A65-200-6K	5900280971913	1/10/100	6500	20	2500	E

LIGHT SOURCE – SAMSUNG LED INSIDE

SLB-GU10 , SLB-G9

LED-LICHTQUELLE

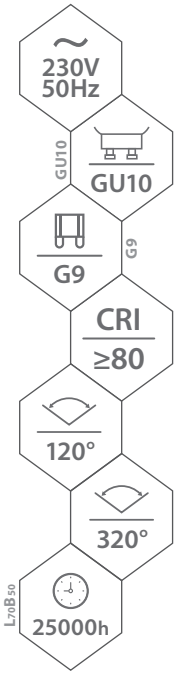



SLB-GU10



SLB-G9-035



SLB-G9-035

NEW

3 YEARS WARRANTY

FLICKER FREE



▶ SLB-GU10



▶ SLB-G9-035



▶ SLB-G9-070





G9 shaft



GU10 end cap



opal diffuser



plastic enclosure

BEMKO code	EAN	package	colour temperature [K]	P_{ON} power [W]	luminous flux [lm]	EEI energy class
D84-SLB-GU10-APM-050-3K	5900280961747	1/100	3000	5	450	E
D84-SLB-GU10-APM-050-4K	5900280961754	1/100	4000	5	460	E
D84-SLB-GU10-APM-050-6K	5900280969354	1/10/100	6500	5	470	E
D84-SLB-GU10-APM-080-3K	5900280949578	1/10/100	3000	8	720	E
D84-SLB-GU10-APM-080-4K	5900280949585	1/10/100	4000	8	740	E
D84-SLB-GU10-APM-080-6K	5900280969347	1/10/100	6500	8	760	E
D84-SLB-G9-035-3K	5900280994189	1/200	3000	3.5	400	E
D84-SLB-G9-035-4K	5900280994196	1/200	4000	3.5	410	E
D84-SLB-G9-070-3K	5900280994165	1/100	3000	7	870	E
D84-SLB-G9-070-4K	5900280994172	1/100	4000	7	880	E

LIGHT SOURCE WITH MOTION SENSOR

LICHTQUELLE MIT BEWEGUNGSSENSOR

SLB-E27-MS

3 YEARS WARRANTY

FLICKER FREE

~ 230V 50Hz

E27

CRI ≥80

220°

L70B50 25000h

P_{sb} <0.5W

+SES

Intended use:

- staircases
- corridors
- garden posts
- front door lighting



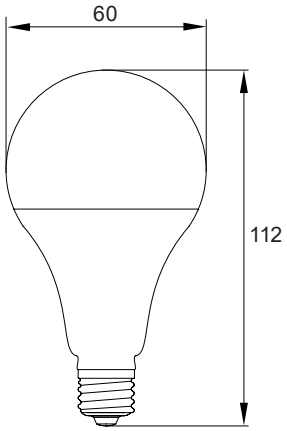

3000K warm colour

4000K neutral colour

6500K cold colour

SAMSUNG LED inside

HIGH LUMINOUS EFFICACY

11W up to **100** lm/W



E27 end cap



microwave motion sensor
switches on
at <20 lx



plastic enclosure



detection range:
180° max. 5 m
tripping time: 30-50 s

code	EAN	package	colour temperature [K]	power [W]	luminous flux [lm]	energy class
D84-SLB-E27-A60-110-3K-MS	5900280966315	1/100	3000	11	1055	F
D84-SLB-E27-A60-110-4K-MS	5900280966339	1/100	4000	11	1055	F
D84-SLB-E27-A60-110-6K-MS	5900280971975	1/100	6500	11	1090	F

LS-COB

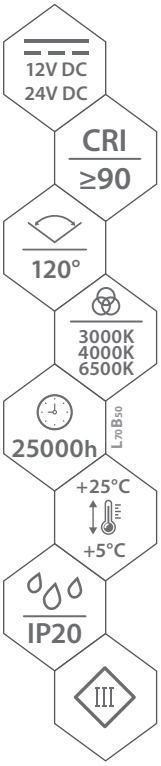





cutting
in 25 mm or 50
mm increments



connection cables



powerful and even
light 480 led/m



3 colour temperatures

BEMKO code	EAN	colour temperature [K]	$P_{ON/1m}$ power consumption [W]	luminous flux [lm]	length [m]	energy class
D87-LS-COB-1600-IP20-AWW-12V	5900280983732	3000	7	600	5	G
D87-LS-COB-1600-IP20-ANW-12V	5900280983749	4000	7	620	5	G
D87-LS-COB-1600-IP20-ACW-12V	5900280983756	6500	7	640	5	G
D87-LS-COB-2400-IP20-AWW-12V	5900280967770	3000	12	1020	5	G
D87-LS-COB-2400-IP20-ANW-12V	5900280967763	4000	12	1080	5	G
D87-LS-COB-2400-IP20-ACW-12V	5900280967756	6500	12	1100	5	G
D87-LS-COB-2400-IP20-AWW-24V	5900280967800	3000	14	1240	5	G
D87-LS-COB-2400-IP20-ANW-24V	5900280967794	4000	14	1260	5	G
D87-LS-COB-2400-IP20-ACW-24V	5900280967787	6500	14	1280	5	G
D87-LS-COB-24000-IP20-AWW-12V	5900280968647	3000	12	1020	50	G
D87-LS-COB-24000-IP20-ANW-12V	5900280968630	4000	12	1080	50	G
D87-LS-COB-24000-IP20-ACW-12V	5900280968623	6500	12	1100	50	G

SMD LED STRIP

LED-STREIFEN

LS IP20, IP65





Przekrój taśmy

IP20



variety of models



cutting
in 25 mm or 50
mm increments



watertight cover

Przekrój taśmy

IP65

wodoszczelna osłona

BEMKO code	EAN	colour temperature [K]	$P_{ON/1m}$ power consumption [W]	$Lm/1m$ luminous flux [lm]	m length [m]	EEI energy class
D87-LS-2835-3000-IP20-AWW	5900280940322	3000	4.8	450	50	G
D87-LS-2835-3000-IP20-ANW	5900280940933	4000	4.8	470	50	G
D87-LS-2835-3000-IP20-ACW	5900280940940	6500	4.8	490	50	G
D87-LS-2835-300-IP20-AWW	5900280930286	3000	4.8	450	5	G
D87-LS-2835-300-IP20-ANW	5900280940544	4000	4.8	470	5	G
D87-LS-2835-300-IP20-ACW	5900280930279	6500	4.8	490	5	G
D87-LS-2835-300-IP65-AWW	5900280930309	3000	4.8	440	5	G
D87-LS-2835-300-IP65-ANW	5900280944443	4000	4.8	450	5	G
D87-LS-2835-300-IP65-ACW	5900280930293	6500	4.8	460	5	G
D87-LS-2835-6000-IP20-AWW	5900280936530	3000	9.2	870	50	G
D87-LS-2835-6000-IP20-ANW	5900280940926	4000	9.2	900	50	G
D87-LS-2835-6000-IP20-ACW	5900280934000	6500	9.2	930	50	G
D87-LS-2835-600-IP20-AWW	5900280944405	3000	9.2	870	5	G
D87-LS-2835-600-IP20-ANW	5900280944399	4000	9.2	900	5	G
D87-LS-2835-600-IP20-ACW	5900280944382	6500	9.2	930	5	G
D87-LS-2835-600-IP65-AWW	5900280944436	3000	9.2	810	5	G
D87-LS-2835-600-IP65-ANW	5900280944429	4000	9.2	840	5	G
D87-LS-2835-600-IP65-ACW	5900280944412	6500	9.2	870	5	G



RF-PR4



RF-SRP1



Z0-COB



Z1-COB



Z2-COB



DC-3P



DC-6P

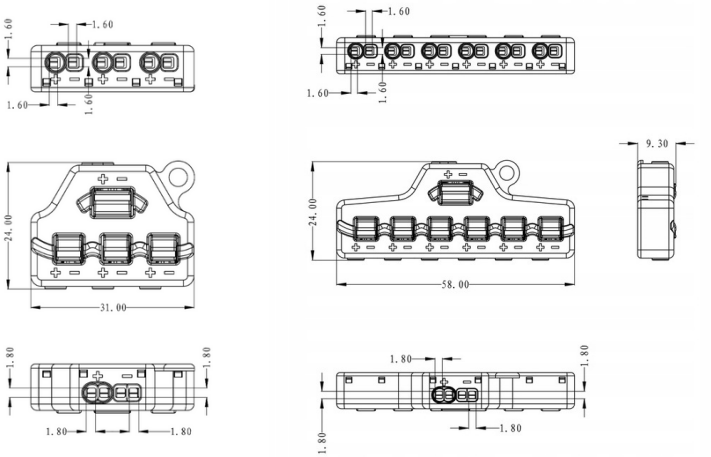

code	EAN	
B44-RF-SRP1-RGBW	5900280933515	1-ZONE LED CONTROLLER RF 2.4G DC 12~24 V 10 A RGBW WITH REMOTE CONTROL
B44-RF-PR4-RGBW	5900280933836	4-ZONE REMOTE CONTROL RF 2.4G RGBW
B46-Z0-08-COB	5900280968340	SELF-LOCKING LED CONNECTOR 8 MM COB
B46-Z1-08-COB	5900280968357	1-SIDED LED CONNECTOR 8 MM COB WITH 15 CM WIRE
B46-Z2-08-COB	5900280968364	2-SIDED LED CONNECTOR 8 MM COB WITH 15 CM WIRE
E08-DC-3P-20	5900280977434	LED POWER DISTRIBUTOR 0-42 V 1-IN/3-OUT (box of 20 pcs)
E08-DC-6P-20	5900280977441	LED POWER DISTRIBUTOR 0-42 V 1-IN/6-OUT (box of 20 pcs)



ACCESSORIES & COMPONENTS

ZUBEHÖR & KOMPONENTEN

SES

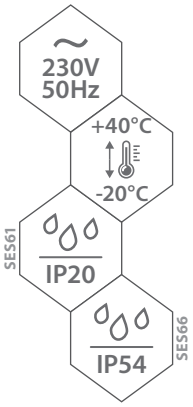



SES66



SES61

▶ SES66

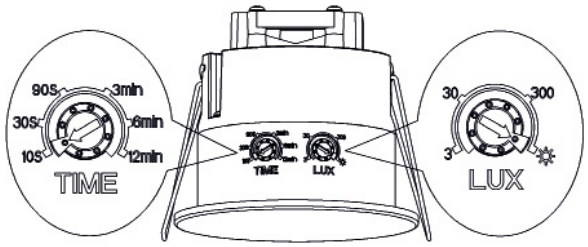

▶ SES61

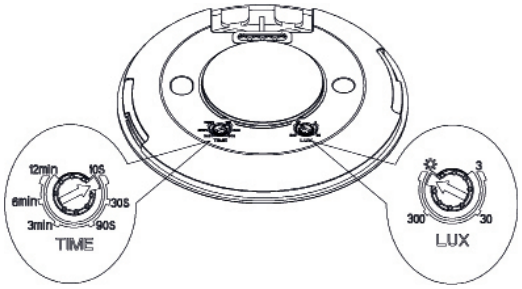

▶ SES66



▶ SES61



Pole detekcji czujnika

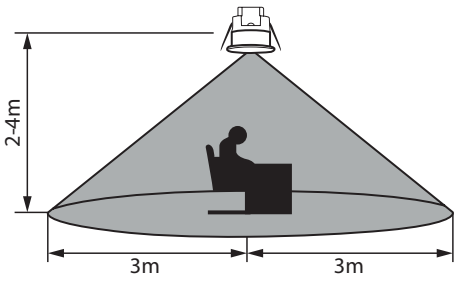

BEMKO code	EAN	package	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B54-SES61WH	5900280984265	1/50	time / lux	microwave sensor, surface-mounted	360° max. Ø6m	1000 / 2000
B54-SES66WH	5900280984258	1/50	time / lux	presence sensor, flush-mounted	360° max. Ø6m	600 / 1200

MOTION SENSOR

BEWEGUNGSMELDER

BEMKO

SES



SES05WH



SES05BL-A



SES05BL-B

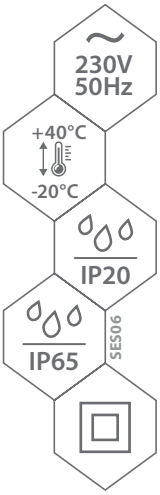



SES06WH



SES06BL

Detection field of the SES08WH sensor

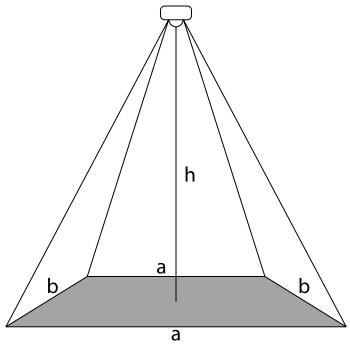

a=20m b=4m h=10m



SES07WH
with a presence
function



SES08WH

▶ SES05WH



▶ SES05BL-A/SES05WH-A



▶ SES05BL-B/SES05WH-B



▶ SES06BL/WH



▶ SES07WH/SES08WH





sensor adjustment



screw connector (SES06, SES05BL/WH-A, SES05BL/WH-B)



easy access to control knobs



SES08WH – rectangular shape of the detection field (4 m x 20 m)

BEMKO code	EAN	package	colour	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED/incandescent)
B50-SES05WH	5908311364192	1/50	white	time / lux	PIR (infrared)	360° max. Ø6m	300 / 1200
B50-SES05WH-A	5900280914361	1/50	white	time / lux	PIR (infrared)	360° max. Ø8m	400 / 800
B50-SES05BL-A	5900280933409	1/50	black	time / lux	PIR (infrared)	360° max. Ø8m	400 / 800
B50-SES05BL-B	5900280943286	1/50	black	time / lux	PIR (infrared)	360° max. Ø8m	200 /400
B50-SES05WH-B	5900280943293	1/50	white	time / lux	PIR (infrared)	360° max. Ø8m	200 / 400
B50-SES07WH	5900280911322	1/50	white	time / lux	PIR (infrared)	360° max. Ø20m	1000 / 2000
B50-SES06WH	5900280991881	1/50	white	time / lux	PIR (infrared)	360° max. Ø8m	1000 / 2000
B50-SES06BL	5900280991898	1/50	black	time / lux	PIR (infrared)	360° max. Ø8m	1000 / 2000
B50-SES08WH	5900280918574	1/50	white	time / lux	PIR (infrared)	4 m x 20 m	1000 /2000

SES

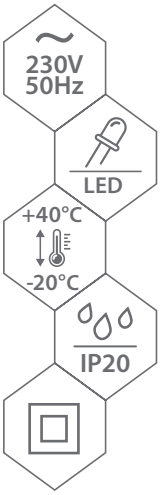



SES60WH

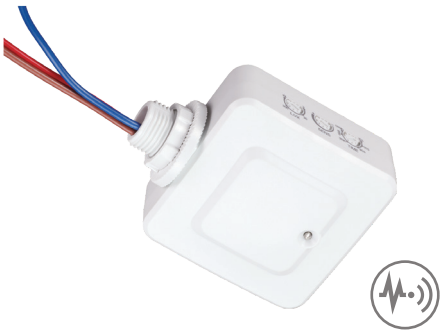

SES68WH



SES60WH-A



SES60BL-A

▶ SES60WH



▶ SES68WH



▶ SES60BL-A/60WH-A



Detection field of the SES68WH sensor





SES60WH: connection terminal



SES60WH: sensor adjustment when cover is removed



SES68WH: mounting gland



SES68WH: sensor adjustment



SES60WH: penetrator for connection cable

BEMKO code	EAN	package	colour	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B52-SES60WH	5900280908674	1/100	white	time / lux / sens	microwave	360° max. 8 m	300 / 1200
B52-SES60WH-A	5900280915764	1/50	white	time / lux / sens	microwave	360° max. 8 m	300 / 800
B52-SES60BL-A	5900280934208	1/50	black	time / lux / sens	microwave	360° max. 8 m	300 / 800
B62-SES68WH	5900280918598	1/50	white	time / lux / sens	microwave	360° max. 10 m	300 / 1200

MOTION SENSOR

BEWEGUNGSMELDER

BEMKO

SES



SES04WH



SES04WH-A

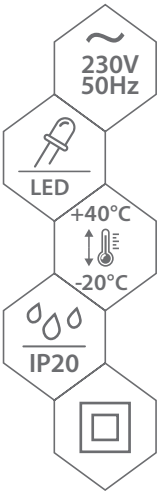



SES64WH



SES03WH

▶ SES04WH



▶ SES04WH-A



▶ SES64WH



▶ SES03WH







SES03 – operating mode switch



SES03 – sensor lens



SES04WH-A sensor adjustment



connection terminal



mounting springs



mounting springs

BEMKO code	EAN	package	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B50-SES03WH	5900280904140	1/100	time / lux	PIR (infrared)	160° max. 9 m	200 / 500
B50-SES04WH	5900280901460	1/50	time / lux	PIR (infrared)	360° max. 6 m	300 / 1200
B50-SES04WH-A	5900280914385	1/50	time / lux	PIR (infrared)	360° max. 8 m	400 / 800
B52-SES64WH	5900280921109	1/50	time / lux / sens	microwave	360° max. 8 m	300 / 1200

SES

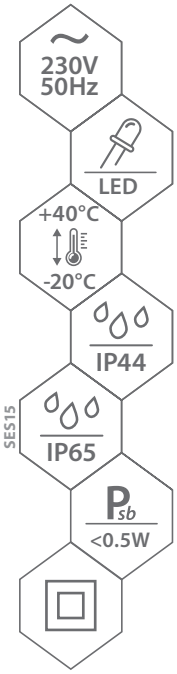



SES09WH



SES10WH



SES15BL



SES12BL-A

▶ SES09



Adjustment:
Vertical: 180°

▶ SES10



Adjustment:
Vertical: 180°
Horizontal: 180°

▶ SES12-A



Adjustment:
Horizontal: 180°

▶ SES15

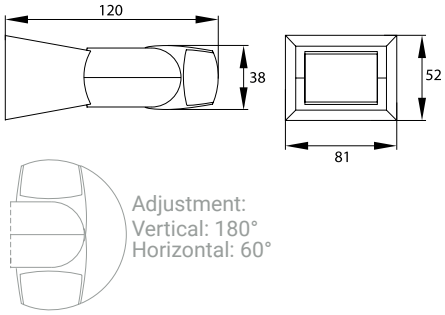

Adjustment:
Vertical: 180°
Horizontal: 60°



SES09
sensor adjustment



SES10
sensor adjustment



SES12
sensor adjustment



SES15
sensor adjustment

BEMKO code	EAN	package	colour	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B50-SES09BL	5908311361276	1/50	black	time / lux	PIR (infrared)	180°x 90°; max. 12 m	300 / 1200
B50-SES09WH	5908311361269	1/50	white	time / lux	PIR (infrared)	180°x 90°; max. 12 m	300 / 1200
B50-SES10BL	5908311361283	1/50	black	time / lux / sens	PIR (infrared)	180°x 90°; max. 12 m	300 / 1200
B50-SES10WH	5908311361290	1/50	white	time / lux / sens	PIR (infrared)	180°x 90°; max. 12 m	300 / 1200
B50-SES12BL-A	5900280914347	1/50	black	time / lux	PIR (infrared)	180°x120°; max. 12 m	400 / 800
B50-SES12WH-A	5900280914323	1/50	white	time / lux	PIR (infrared)	180°x120°; max. 12 m	400 / 800
B50-SES15BL	5900280908650	1/50	black	time / lux	PIR (infrared)	180°x120°; max. 12 m	300 / 1200
B50-SES15WH	5900280908667	1/50	white	time / lux	PIR (infrared)	180°x120°; max. 12 m	300 / 1200

MOTION SENSOR

BEWEGUNGSMELDER

BEMKO

SES

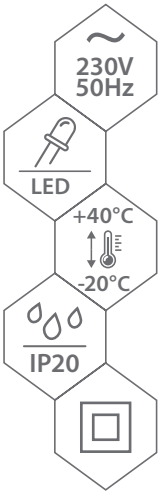



SES71WH

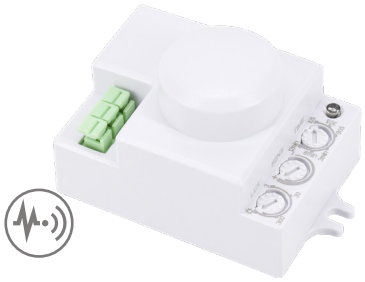

SES72WH

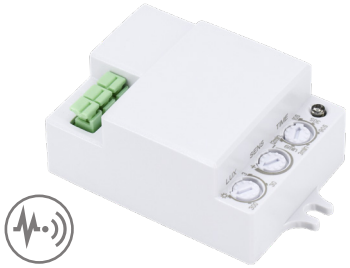

SES73WH



SES74WH



SES76WH

▶ SES71WH

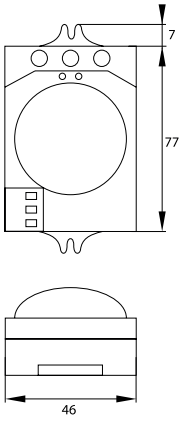

▶ SES72WH

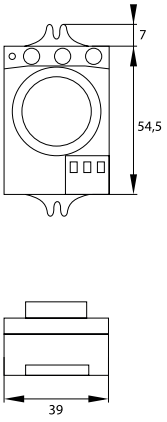

▶ SES73WH

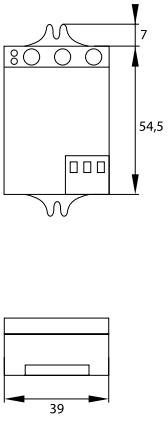

▶ SES74WH

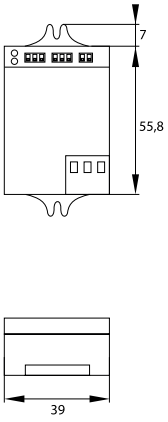

▶ SES76WH

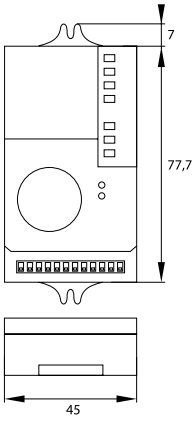



SES71WH
potentiometer adjustment
(time from 10 s to 12 min)



SES72WH
potentiometer adjustment
(time from 10 s to 12 min)



SES73WH
potentiometer adjustment
(time from 10 s to 12 min)



SES74WH
step adjustment



connection terminal

BEMKO code	EAN	package	colour	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B52-SES71WH	5900280902542	1/50	white	time / lux / sens	microwave	360° max. 8 m	300 / 1200
B52-SES72WH	5900280908681	1/50	white	time / lux / sens	microwave	360° max. 6 m	300 / 1200
B52-SES73WH	5900280908698	1/50	white	time / lux / sens	microwave	360° max. 15 m	300 / 1200
B52-SES74WH	5900280908704	1/50	white	time / lux / sens	microwave	360° max. 15 m	300 / 1200
B52-SES76WH	5900280913616	1/50	white	time / lux / sens	microwave	360° max. 15 m	dimmable only maximum LED source 600W

SES, KZQ

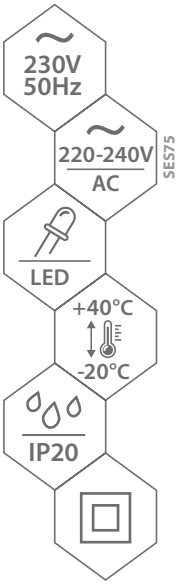



SES24WH



SES25WH



KZQ-500



SES75WH

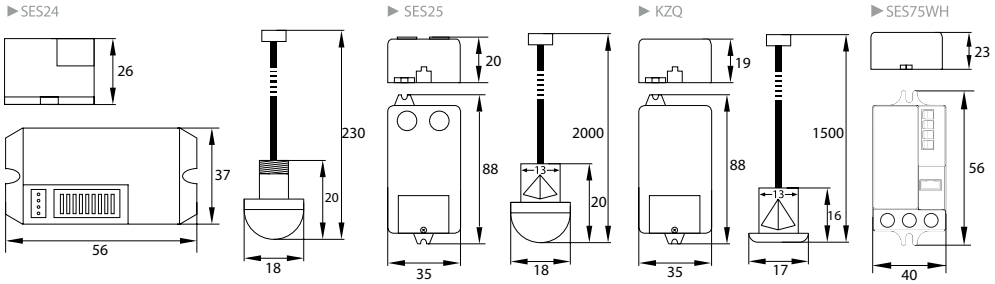



SES24WH
step adjustment



SES24WH
probe with cable (23 cm)



SES25WH
TIME (10 s ÷ 15 min)
and LUX (3 ÷ 2000
lux) adjustment



SES75WH
adjustment TIME
(10 s ÷ 12 min)
and LUX (3 ÷ 2000
lux) adjustment



KZQ-500
probe with cable (1.5 m)

BEMKO code	EAN	package	colour	method of adjustment	sensor type	detection range	P_{MAX} power [W] (LED / incandescent)
B51-SES24WH	5900280907226	1/100	white	time / lux / sens	PIR (infrared)	360° max. Ø6m	400 / 800
B51-SES25WH	5900280940261	1/100	white	time / lux	PIR (infrared)	360° max. Ø8m	200 / 500
B51-SES75WH	5900280960122	1/100	white	time / lux / sens	microwave	360° max. 15 m	300 / 1200
B53-KZQ-500	5900280905819	1/100	white	-	proximity sensor	5 cm ÷ 6 cm	200 / 500
B53-KZQ-500-A	5900280916358	1/50	white	-	proximity sensor	5 cm ÷ 6 cm	200 / 500
B51-SES24WH-12V	5900280975904	1/100	white	time / lux / sens	PIR (infrared)	360° max. Ø6m	max. 60

TWILIGHT SENSOR

DÄMMERUNGSSENSOR

CO-WZ, ST-CZ

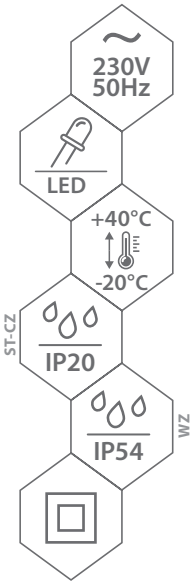



CO-WZ20



ST-CZ10

▶ CO-WZ20



▶ CO-CZ10

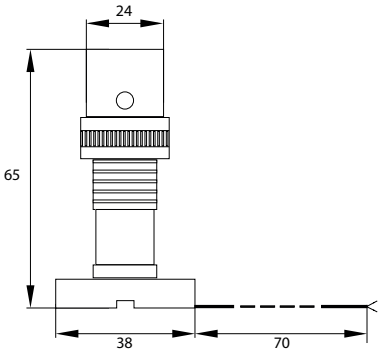



CO-WZ20
3-cable connection



CO-WZ20
photoresistor



ST-CZ
LUX adjustment



ST-CZ10
surface-mounting
and flush-mounting
possible (ø18)

code	EAN	package	colour	sensor type	operation range	maximum power (LED / incandescent) [W]
B55-CO-WZ20	5900280902436	1/100	white	twilight	<10 lux	300/2000
B55-ST-CZ10	5900280915368	1/100	white	twilight	3 ÷ 2000 lux	-

TS

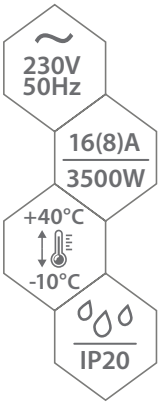



TSMF3



TSMF20



TSWF1



TSEF1

▶TSMF3



▶TSWF1



▶TSEF1



▶TSMF20





E-type socket (CEE 7/6)



rotating disc with 96 ratchets



switch: programmer operation / continuous operation



TSMF20 programmer dial on the perimeter of the socket

BEMKO code	EAN	package	type	switching-on time [min ÷ max].
B60-TSMF20	5908311362174	1/12/48	manual daily	15 min ÷ 24 h
B60-TSMF3	5908311362150	1/12/48	manual daily	15 min ÷ 24 h
B60-TSWF1	5908311362198	1/12/48	manual weekly	105 min ÷ 7 days
B60-TSEF1	5908311362211	1/12/48	electronic weekly	8 programmes per day

SCHUKO PROGRAMMER

ZEITSCHALTUHR SCHUKO

TS

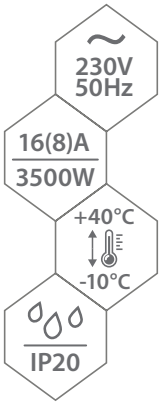



TSMD20



TSMD3



TSWD1



TSED1

▶TSMD3





▶TSWD1





▶TSED1



▶TSMD20





socket type F (CEE 7/3)



rotating disc with 96 ratchets



switch: programmer operation / continuous operation



TSMD20 programmer dial on the perimeter of the socket

code	EAN	package	type	switching-on time [min ÷ max].
B62-TSMD20	5908311362181	1/12/48	manual daily	15 min ÷ 24 h
B62-TSMD3	5908311362167	1/12/48	manual daily	15 min ÷ 24 h
B62-TSWD1	5908311362204	1/12/48	manual weekly	105 min ÷ 7 days
B62-TSED1	5908311362228	1/12/48	electronic weekly	8 programmes per day

EXTENSION CABLE WITH GROUND AND SWITCH

NA GU/GW

VERLÄNGERUNGSSCHNUR MIT ERDUNG UND SCHALTER

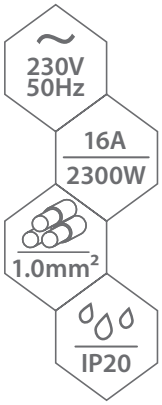



NA4GW



NA4GU



NA3GW

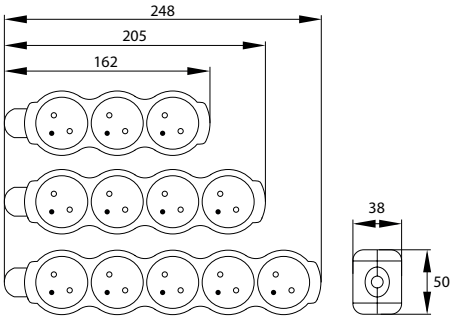

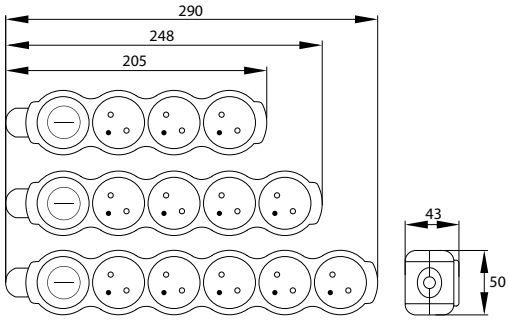





cable with polyvinyl chloride insulation (H05VV-F) 3 x 1.0 mm²



mains plug CEE 7/7



mounting pendant included



mains sockets (System Child Protection)



large switch on GW models



modern design

code	EAN	package	number of sockets – type C (CEE 7/5)	cable length [m]	switch
B04-NA3GU1M	5900280932389	1/10/20	3	1.5	no
B04-NA3GW1M	5900280932471	1/10/20	3	1.5	yes
B04-NA4GU1M	5900280932419	1/10/20	4	1.5	no
B04-NA4GW1M	5900280932501	1/10/20	4	1.5	yes
B04-NA5GU1M	5900280932440	1/10/20	5	1.5	no
B04-NA5GW1M	5900280932532	1/10/20	5	1.5	yes

EXTENSION CABLE WITH GROUND AND SWITCH

VERLÄNGERUNGSSCHNUR MIT ERDUNG UND SCHALTER

NB GU/GW





NB3GU



NB4GW



NB5GU

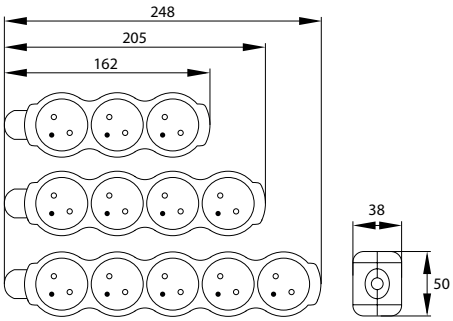

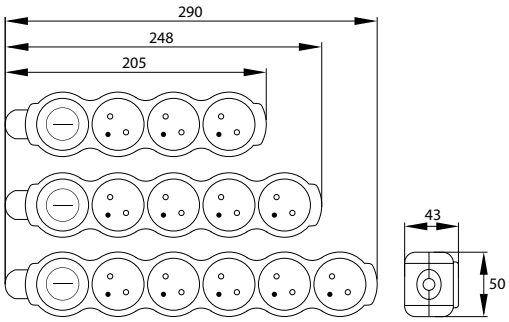





cable with polyvinyl chloride insulation (H05VV-F) 3 x 1.5 mm²



mains plug CEE 7/7



mounting pendant included



mains sockets (System Child Protection)



large switch on GW models



modern design

code	EAN	package	number of sockets – type C (CEE 7/5)	cable length [m]	switch
B05-NB3GU1M	5900280932655	1/10/20	3	1.5	no
B05-NB3GU3M	5900280932662	1/10/20	3	3	no
B05-NB3GU5M	5900280932679	1/10/20	3	5	no
B05-NB3GW1M	5900280932747	1/10/20	3	1.5	yes
B05-NB3GW3M	5900280932754	1/10/20	3	3	yes
B05-NB3GW5M	5900280932761	1/10/20	3	5	yes
B05-NB4GU1M	5900280932686	1/10/20	4	1.5	no
B05-NB4GU3M	5900280932693	1/10/20	4	3	no
B05-NB4GU5M	5900280932709	1/10/20	4	5	no
B05-NB4GW1M	5900280932778	1/10/20	4	1.5	yes
B05-NB4GW3M	5900280932785	1/10/20	4	3	yes
B05-NB4GW5M	5900280932792	1/10/20	4	5	yes
B05-NB5GU1M	5900280932716	1/10/20	5	1.5	no
B05-NB5GU3M	5900280932723	1/10/20	5	3	no
B05-NB5GU5M	5900280932730	1/10/20	5	5	no
B05-NB5GW1M	5900280932808	1/10/20	5	1.5	yes
B05-NB5GW3M	5900280932815	1/10/20	5	3	yes
B05-NB5GW5M	5900280932822	1/10/20	5	5	yes

SCHUKO EXTENSION CABLE 1.0 mm

NA GS

SCHUKO VERLÄNGERUNGSSCHNUR MIT ERDUNG

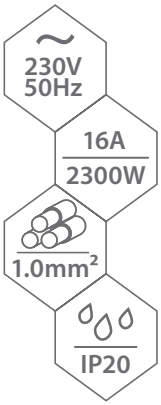



NA3GS NA3GSW NA5GS

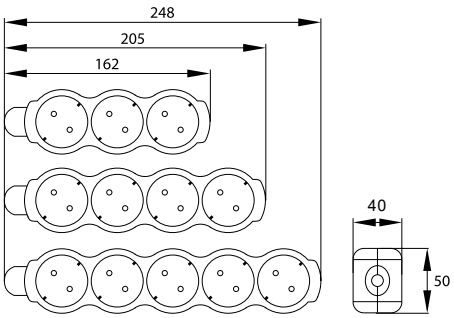

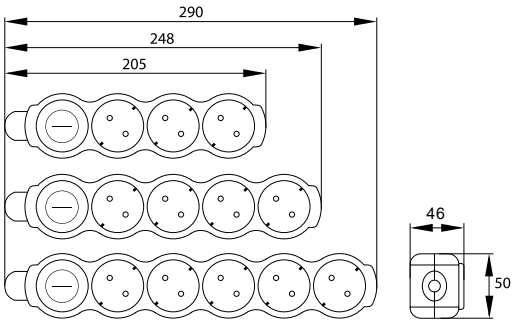





cable with polyvinyl chloride insulation (H05VV-F) 3x1.0mm²



mains plug CEE 7/7



mounting pendant included



mains sockets (System Child Protection)



large switch on GW models



modern design

BEMKO code	EAN	package	number of sockets – type F (CEE 7/3)	cable length [m]	switch
B06-NA3GS1M	5900280972361	1/10/20	3	1.5	-
B06-NA3GSW1M	5900280972392	1/10/20	3	1.5	yes
B06-NA5GS1M	5900280972422	1/10/20	5	1.5	-
B06-NA5GSW1M	5900280972453	1/10/20	5	1.5	yes

SCHUKO EXTENSION CABLE 1.5 mm

SCHUKO VERLÄNGERUNGSSCHNUR MIT ERDUNG

NB GS





NB3GS NB3GSW NB5GS

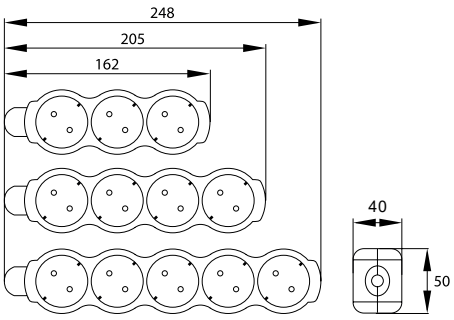

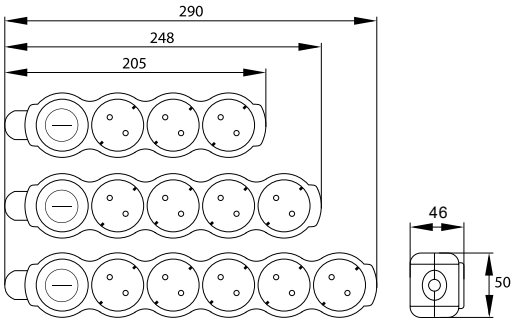





cable with polyvinyl chloride insulation (H05VV-F) 3x1.5mm²



mains plug CEE 7/7



mounting pendant included



mains sockets (System Child Protection)



large switch on GW models



modern design

code	EAN	package	number of sockets – type F (CEE 7/3)	cable length [m]	switch
B06-NB3GS1M	5900280937643	1/10/20	3	1.5	-
B06-NB3GS3M	5900280937650	1/10/20	3	3	-
B06-NB3GS5M	5900280937667	1/10/20	3	5	-
B06-NB3GSW1M	5900280937674	1/10/20	3	1.5	yes
B06-NB3GSW3M	5900280937681	1/10/20	3	3	yes
B06-NB3GSW5M	5900280937698	1/10/20	3	5	yes
B06-NB5GS1M	5900280937704	1/10/20	5	1.5	-
B06-NB5GS3M	5900280937711	1/10/20	5	3	-
B06-NB5GS5M	5900280937728	1/10/20	5	5	-
B06-NB5GSW1M	5900280937735	1/10/20	5	1.5	yes
B06-NB5GSW3M	5900280937742	1/10/20	5	3	yes
B06-NB5GSW5M	5900280937759	1/10/20	5	5	yes

EXTENSION CABLE WITH SWITCH AND USB PLUG

NB GW

VERLÄNGERUNGSSCHNUR MIT SCHALTER UND USB

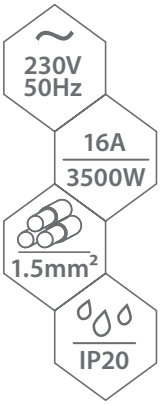



NB3GW



NB5GW





additional USB A + C sockets



built-in switch



grounding



high-quality materials

BEMKO code	EAN	package	number of sockets – type C (CEE 7/1)	cable length [m]
B05-NB3GW2M-2U	5900280984135	1/10/20	3	1.5
B05-NB5GW2M-2U	5900280984142	1/10/20	5	1.5

POWER STRIP, SOCKET, PLUG

KABELLOSE MEHRFACHSTECKDOSE, STECKDOSE, NETZSTECKER





HS-ZF01/03-2U



HS-P01C



HS-ZF01/03-2U



HS-ZF01/02A-W



HS-ZF01/03A









product made of
high-quality materials



HS-ZF01/03-2U
2x USB socket
max. 2.4 A



HS-P01C grounding
UNISCHUKO side plug



HS-P01C
two colour variants
(white/black)



HS-P01C functional
angular
cable output

BEMKO code	EAN	package	number of sockets type E (CEE 7/5)	description
B22-HS-P01C-BL	5900280993373	1/20/200	-	UNISCHUKO angle plug with grounding
B22-HS-P01C-WH	5900280993366	1/20/200	-	UNISCHUKO angle plug with grounding
B25-HS-ZF01/03-2U	5900280960382	1/4/40	3	power strip with USB
B25-HS-ZF01/03	5900280960399	1/4/40	3	power strip
B25-HS-ZF01/03A	5900280960405	1/8/80	3	power strip
B25-HS-ZF01/02A-W	5900280960412	1/8/80	2	power strip with switch
B25-HS-ZF01/02U-L	5900280993380	1/50	2	POWER STRIP +"0" 2xGN + USB A+C
B25-HS-ZF01/03-L	5900280993397	1/50	3	POWER STRIP +"0" 3xGN

REEL EXTENDER

4ZRF, 4ZRS

KABELTROMMEL

CABLE ► OMY (PVC insulation, H05VV-F)
LEITER ► OMY (PVCisoliert, H05VV-F)

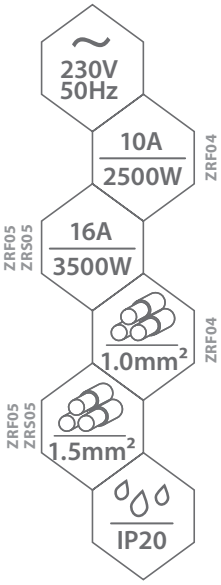



4ZRF



4ZRS

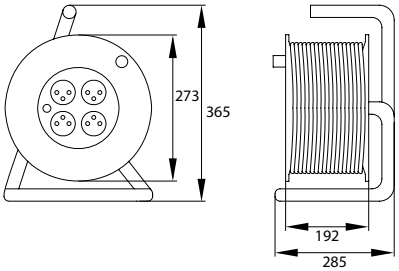



Uncoiled cable
1.0 mm² - max. 2500W (10A)
1.5 mm² - max. 3500W (16A)



Coiled cable
1.0 mm² - max. 1000W (4A)
1.5 mm² - max. 1200W (4.8A)



4ZRF – 4 E-type sockets (CEE 7/5)



4ZRS – 4 F-type sockets (CEE 7/3)



mains plug (CEE 7/7)



thermal protection



guide handle



ergonomic handle

BEMKO code	EAN	package	cable cross section	cable length [m]
B15-DG-4ZRF04-20	5908311363065	1	3x 1 mm2	20
B15-DG-4ZRF04-30	5908311363072	1	3x 1 mm2	30
B15-DG-4ZRF04-40	5908311363089	1	3x 1 mm2	40
B15-DG-4ZRF05-15	5908311363096	1	3x 1.5mm2	15
B15-DG-4ZRF05-25	5908311363102	1	3x 1.5mm2	25
B15-DG-4ZRF05-50	5908311363119	1	3x 1.5mm2	50
B16-DG-4ZRS05-15	5900280904515	1	3x 1.5mm2	15
B16-DG-4ZRS05-25	5900280904522	1	3x 1.5mm2	25
B16-DG-4ZRS05-50	5900280904539	1	3x 1.5mm2	50

12 V DC FLUSH EXTENSION CABLE

ELEKTRONISCHER NETZTEIL LED DC

LD, LDR

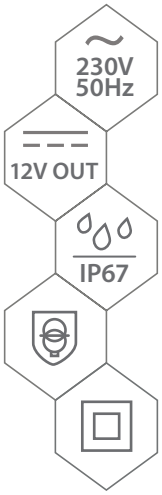



LDR030

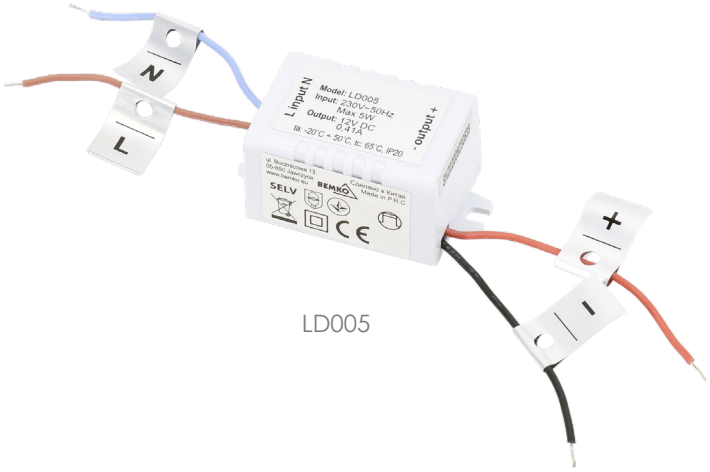

LD005

▶ LDR



▶ LDP005





installation in a Ø60 junction box



voltage stabilisation



protection:
- short circuit protection
- overload protection



LD005: mounting bracket

BEMKO code	EAN	package	P_{max} power [W]	U voltage [V]	I_{max} current [A]
B42-LDR030-12V	5900280972255	1/84	30	12 V DC	2.5
B43-LDR030-24V	5900280972262	1/84	30	24V DC	1.25
B42-LD005-12V	5900280912435	1/500	5	12 V DC	0.41

LED ELECTRONIC POWER SUPPLY IP67 12 V

LDS2

ELEKTRONISCHER NETZTEIL LED HERMETISCH IP67 12 V

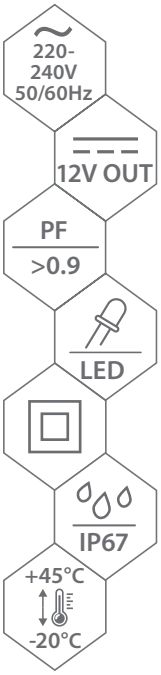



LDS2-024



LDS2-060



LDS2-040



LDS2-100

LDS2-024



LDS2-040



LDS2-060



LDS2-100





compact dimensions



IP rating: IP67



wide range of operating temperature



compliance with EMC standards: PN-EN 55015, PN-EN 61000-3-2

BEMKO code	EAN	package	P_{max} power [W]	EFF efficacy [xx%]	I_{max} current [A]
B42-LDS2-024	5900280988850	1/50	max. 24	86	2.0
B42-LDS2-040	5900280988867	1/50	max. 40	86	3.33
B42-LDS2-060	5900280988874	1/50	max. 60	88	5.0
B42-LDS2-100	5900280988881	1/20	max. 100	92	8.33

12 V DC CONSTANT-VOLTAGE POWER SUPPLY

ELEKTRONISCHER NETZTEIL LED DC

LDW



LDW100



LDW060

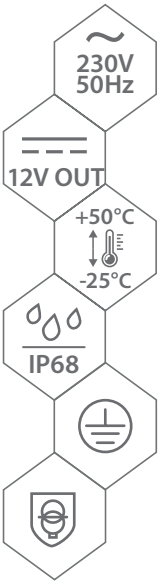



LDW020



LDW030

▶ LDW020



▶ LDW030



▶ LDW060

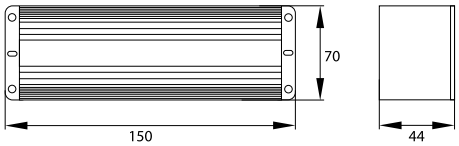

▶ LDW100

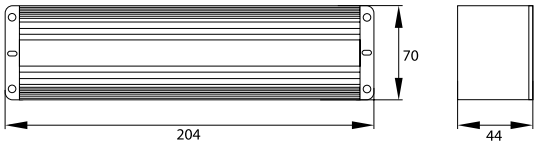

▶ LDW150/200

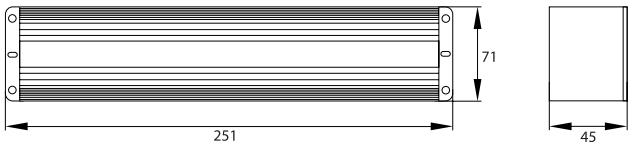



input cable
230 V AC



LDW060/LDW100
two 12 V DC outputs



hermetic
aluminium
enclosure



voltage stabilisation



protection:
- short circuit
protection
- overload protection

code	EAN	package	P_{max} power [W]	U voltage [V]	I_{max} current [A]
B42-LDW020-12V	5900280902719	1/100	20	12 V DC	1.6
B42-LDW030-12V	5900280902726	1/100	30	12 V DC	2.5
B42-LDW060 -12 V	5900280902733	1/25	60	12 V DC	5.0
B42-LDW100-12V	5900280902740	1/15	100	12 V DC	8.3
B42-LDW150-12V	5900280933423	1	150	12 V DC	12.5
B42-LDW200-12V	5900280933430	1	200	12 V DC	16.6
B43-LDW060-24V	5900280972224	1/14	60	24V DC	2.5
B43-LDW100-24V	5900280972231	1/10	100	24V DC	4.16
B43-LDW150-24V	5900280972248	1/10	150	24V DC	6.25

12 V DC LED POWER SUPPLY

LD

ELEKTRONISCHER NETZTEIL LED DC





LD100
LD120



LD040
LD050



LD025

	a [mm]	b [mm]	c [mm]
LD025:	59	85	39
LD040:	97	134	40
LD050:	97	134	40
LD100:	98	198	42
LD120:	99	198	38
LD150/ 200:	98	200	40
LD240/ 360:	115	215	50





connection terminals with flap



green operation indicator light



perforated enclosure



enclosure made of hard steel



voltage stabilisation



protection:
- short circuit protection
- overload protection

BEMKO code	EAN	package	P power [W]
B42-LD025	5900280902580	1/100	25
B42-LD040	5900280901804	1/50	40
B42-LD050	5900280902573	1/50	50
B42-LD100	5900280902566	1/28	100
B42-LD120	5908311363188	1/28	120
B42-LD150	5900280933447	1	150
B42-LD200	5900280933454	1	200
B42-LD250	5900280933461	1	250
B42-LD350	5900280933478	1	350

24 V DC LED POWER SUPPLY

ELEKTRONISCHER NETZTEIL LED DC

LDL 24 V

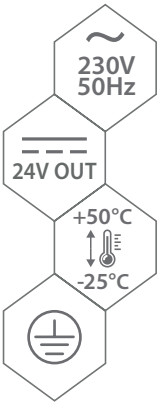



LDL200



LDL120



LDL060

LDL060-24V

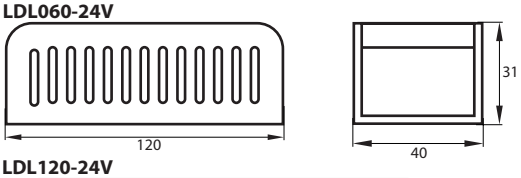

LDL120-24V

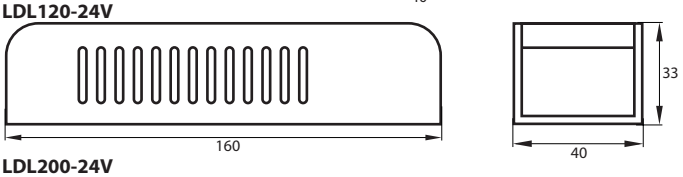

LDL200-24V

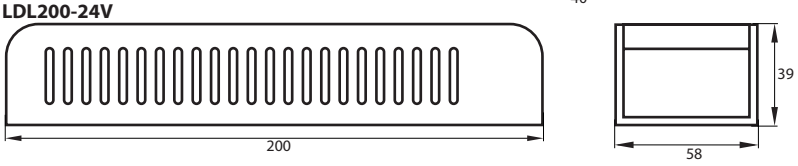



input cable
230 V AC



voltage stabilisation



protection:
- short circuit protection
- overload protection

code	EAN	package	power [W]	IP rating	dimensions
B43-LDL060-24V	5900280972194	1/100	60	IP20	120x40x31
B43-LDL120-24V	5900280972200	1/100	120	IP20	160x40x33
B43-LDL200-24V	5900280972217	1/50	200	IP20	200x58x39

QUICK CONNECTOR

P01, P05

DOSENKLEMMEN

MATERIAL ► PC, copper, stainless steel
MATERIAL ► PC, kupfer, edelstahl

~ max 450V



P052



P053



P01



P055

▶ P052

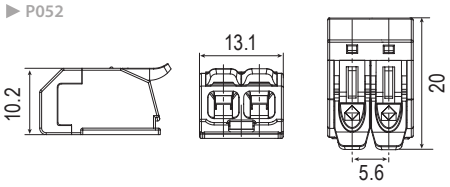

▶ P053

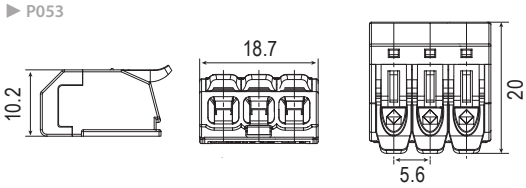

▶ P01

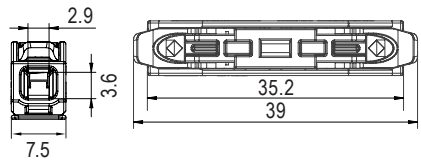

▶ P055

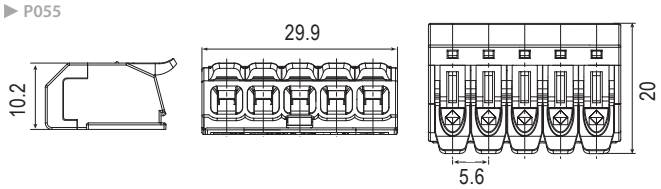



enclosure made of high-quality polycarbonate



option to control of the wiring thanks to transparent enclosure



firm compression of the cable thanks to a lever system



compact package



test opening

BEMKO code	EAN	package	○○+○ number of holes	∅ cable cross section	Imax maximum load [A]
E03-P01-010	5900280984951	10	1+1	0.2 ÷ 4 mm²	32
E03-P01-100	5900280984968	100	1+1	0.2 ÷ 4 mm²	32
E03-P052-10	5900280946584	10	2	0.2 ÷ 4 mm²	32
E03-P052-100	5900280933171	100	2	0.2 ÷ 4 mm²	32
E03-P053-10	5900280946591	10	3	0.2 ÷ 4 mm²	32
E03-P053-50	5900280941480	50	3	0.2 ÷ 4 mm²	32
E03-P055-10	5900280946607	10	5	0.2 ÷ 4 mm²	32
E03-P055-25	5900280941497	25	5	0.2 ÷ 4 mm²	32

COMPACT QUICK CONNECTOR

KOMPAKTE SCHNELLVERBINDER

MATERIAL ► PC

MATERIAL ► PC

PC

~ max 450V

NEW



PC22



PC23

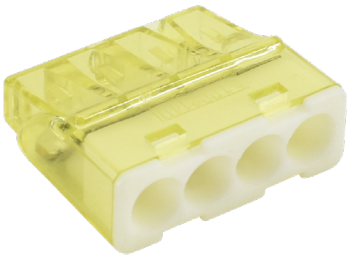

PC24



PC25



colours for easy identification



single wire connection terminals



test opening



	a [mm]	b [mm]	c [mm]
E00-PC22	16.5	10.5	6.6
E00-PC23	16.5	14.7	6.6
E00-PC24	16.5	18.9	6.6
E00-PC25	16.5	23.1	6.6

BEMKO code	EAN	package	○○+○ number of holes	∅ maximum cable cross section	Imax maximum load [A]
E00-PC22-10	5900280993809	10	2	0.5 - 2.5mm²	24
E00-PC23-10	5900280993816	10	3	0.5 - 2.5mm²	24
E00-PC24-10	5900280993823	10	4	0.5 - 2.5mm²	24
E00-PC25-10	5900280993830	10	5	0.5 - 2.5mm²	24
E00-PC22-100	5900280989987	100	2	0.5 - 2.5mm²	24
E00-PC23-100	5900280989994	100	3	0.5 - 2.5mm²	24
E00-PC24-100	5900280990006	100	4	0.5 - 2.5mm²	24
E00-PC25-100	5900280990013	100	5	0.5 - 2.5mm²	24

CABLE GLAND WITH THREAD “PG”

DK-PG

KABELVERSCHRAUBUNG MIT GEWINDE "PG"

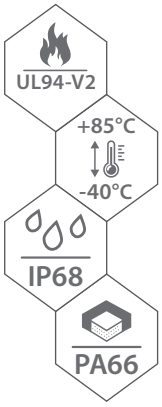



DK-PG-9-S1 DK-PG-11-S1 DK-PG-16-S1 DK-PG-21-S1



DK-PG-29-S1 DK-PG-36-S1 DK-PG-42-S1 DK-PG-48-S1

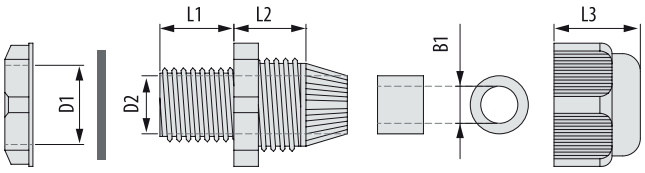

BEMKO code	EAN EAN	packaging*	dimensions [mm] D1	D2	L1	L2	L3	B1	∅ for the cable [mm]
E45-DK-PG-7-S/1	5900280964595	100	10.9	8.1	10.4	14.5	10.5	6.4	3.5 - 6
E45-DK-PG-9-S/1	5900280964601	100	15.3	12.2	9.9	15.8	17.2	8.2	4 - 8
E45-DK-PG-11-S/1	5900280964618	100	17.9	14.6	10.6	15.5	17.5	10.8	5 - 10
E45-DK-PG-13.5-S/1	5900280964625	100	20.2	16.2	10.3	17.8	17.9	13.3	6 - 12
E45-DK-PG-16-S/1	5900280964632	100	21.3	18.3	11.2	18.5	20.5	14.1	10 - 14
E45-DK-PG-21-S/1	5900280964649	100	26.9	21.8	11.6	18.7	23.1	18	13 - 18
E45-DK-PG-29-S/1	5900280964656	50	35.1	29.8	12.4	22.6	24.8	25	18 - 25
E45-DK-PG-36-S/1	5900280964663	20	44.7	37.1	12.6	25.1	26.1	33.8	22 - 32
E45-DK-PG-42-S/1	5900280964670	20	50.4	43.3	17.3	26.5	30.5	39.5	30 - 38
E45-DK-PG-48-S/1	5900280964687	10	56.1	48.2	20.9	28.1	31.5	44.2	34 - 44

*sale only in multipacks

CABLE GLAND WITH METRIC THREAD

KABELVERSCHRAUBUNG MIT METRISCHEM GEWINDE

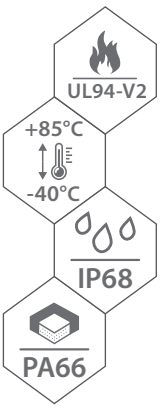



M-12-S/1



M-16-S/1



M-20-S/1



M-25-S/1



M-32-S/1



M-40-S/1



M-50-S/1

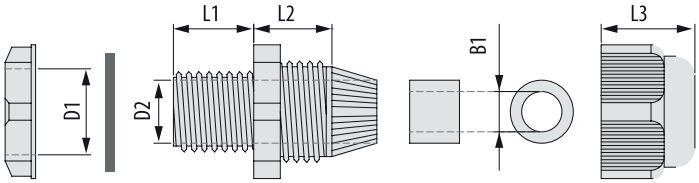



BEMKO code	EAN	packaging*	dimensions [mm] D1	D2	L1	L2	L3	B1	for the cable [mm]
E45-M-12-S/1	5900280964694	25	12	9.8	8.5	13.6	19	5.5	4.6 - 7.6
E45-M-16-S/1	5900280964700	25	16	13.9	15	14.4	2	8	6.0 - 10
E45-M-20-S/1	5900280964717	20	20	17.8	15	15.2	27	12.2	9.0 - 14
E45-M-25-S/1	5900280964724	20	25	22.8	15	16.3	33	15	13 - 18
E45-M-32-S/1	5900280964731	20	32	30.3	15	22.4	41	21.5	18 - 32.5
E45-M-40-S/1	5900280964748	10	40	37.2	20	22.5	50	27	24 - 30
E45-M-50-S/1	5900280964755	10	50	47.8	22	24	62	36	30 - 39

*sale only in multipacks

ZK

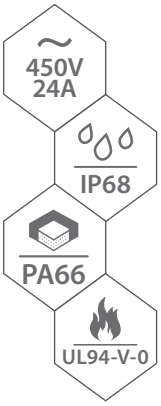



ZK03-IP68



ZK03-IP68-QC



ZK03-IP68-T



ZK05-IP68



silicone gasket



durable screw terminals
up to 2.5 mm²



quick installation of
wires up to 1.5 mm²



high quality
of the enclosure

code	EAN	package	description
E04-ZK03-IP68	5900280977458	1/20/200	HERMETIC 3-WAY CONNECTOR
E04-ZK03-IP68-QC	5900280977465	1/20/200	HERMET. 3-WAY CONNECTOR – QUICK CONNECTOR
E04-ZK03-IP68-T	5900280977472	1/10/100	HERMET. 3-WAY CONNECTOR – TRIPLE CONNECTOR
E04-ZK05-IP68	5900280988461	1/10/50	HERMET. 5-WAY CONNECTOR

JUNCTION BOX

WASSERDICHTE ANSCHLUSSDOSE, EIN-AUS VERTEILERDOSE

ENCLOSURE MATERIAL ► Polypropylene
GEHÄUSEMATERIAL ► POLYPROPYLEN

HP, ZZ

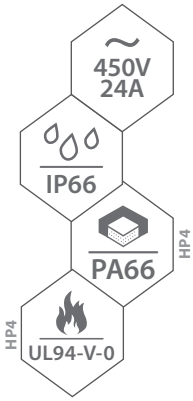



HP2-PG9



HP3-PG9



HP4-M16

code	EAN	package	description
E04-HP2-PG9-IP66	5900280977489	1/10/100	2x 1.5mm² PG9
E04-HP3-PG9-IP66	5900280977496	1/10/100	3x 1.5mm² PG9
E04-HP4-M16-IP66	5900280977502	1/10/100	4x 1.5mm² M16

THROUGH CONNECTOR, INSTALLATION BOX

PI08/12, ZZ

GANGSVERBINDER, INSTALLATIONSDOSE

MATERIAL ▶ PP

MATERIAL ▶ PP

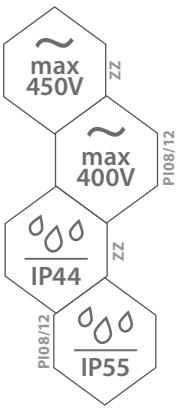



PI08



PI12



ZZ02

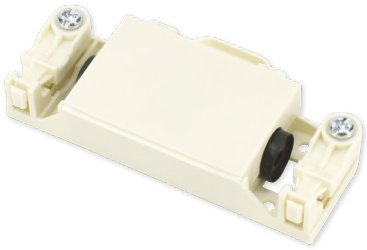

ZZ03

▶ PI08





▶ PI12

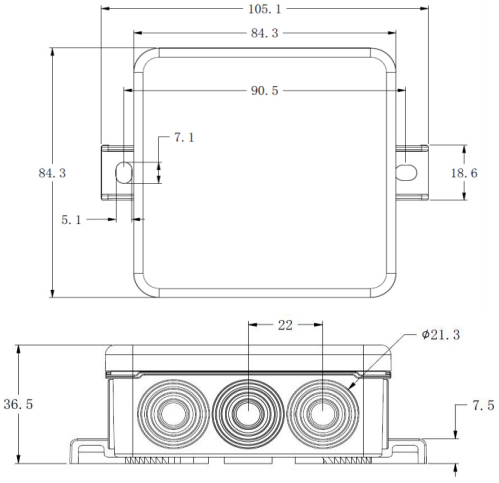



ZZ: terminal connector



ZZ: tight seal



PI: external mounting brackets



PI: type of culverts – weakening

BEMKO code	EAN	package	number of terminals/wires	description
E04-PI08-IP55	5900280993984	1/100	8	SURFACE INSTALLATION BOX 85x45x37 MM IP55 8P LIGHT GREY
E04-PI12-IP55	5900280988560	1/100	12	SURFACE INSTALLATION BOX 85x85x36.5 MM IP55 12P LIGHT GREY
E04-ZZ02-IP44	5900280977519	1/250/1000	2	THROUGH TERMINAL CONNECTOR IP44 2-TRACK
E04-ZZ03-IP44	5900280977427	1/50/300	3	THROUGH TERMINAL CONNECTOR IP44 3-TRACK

HERMETIC SWITCHBOARD IP65

Schelinger BEMKO

HERMETISCHER VERTEILER FÜR DIE AUFPUTZMONTAGE, IP65-ANSCHLUSS

RHN

MATERIAL ► PC, ABS

MATERIAL ► PC, ABS

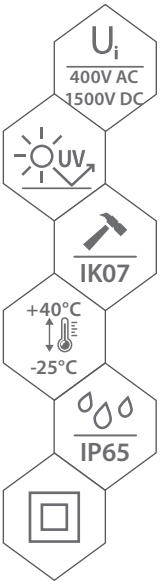

NEW



RHN-18P



RHN-24P

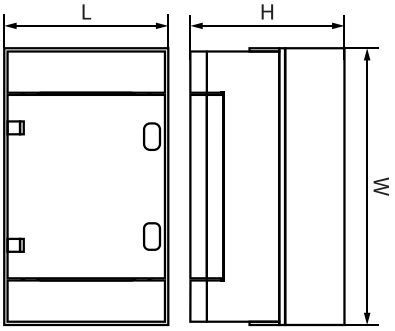

Indeks	W [mm]	L [mm]	H [mm]
RHN-IP65-NPE-04P	210	140	100
RHN-IP65-NPE-08P	210	215	100
RHN-IP65-NPE-12P	260	300	140
RHN-IP65-NPE-18P	285	410	140
RHN-IP65-NPE-24P	420	298	140
RHN-IP65-NPE-36P	573	318	150



increased material resistance to weather conditions



tightness degree: IP65



modern design



easy access to the equipment and cabling



silicone seals as standard

Schelinger code	EAN	package	terminals
A80-RHN-IP65-NPE-04P	5900280996435	1/20	4N+4PE 1x4P
A80-RHN-IP65-NPE-08P	5900280996442	1/20	8N+8PE 1x8P
A80-RHN-IP65-NPE-12P	5900280996459	1/20	12N+12PE 1x12P
A80-RHN-IP65-NPE-18P	5900280996466	1/5	18N+18PE 1x18P
A80-RHN-IP65-NPE-24P	5900280996473	1/5	24N+24PE 2x12P
A80-RHN-IP65-NPE-36P	5900280996480	1/4	36N+36PE 3x12P

SURFACE-MOUNTED SWITCHBOARDS

RDN

Aufputzverteiler IP40 KLEMME

MATERIAL ► PC, ABS

MATERIAL ► PC, ABS

NEW

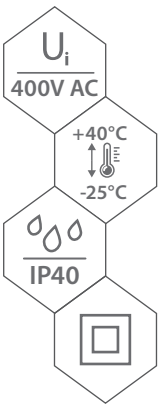



RDN-08P



RDN-36P

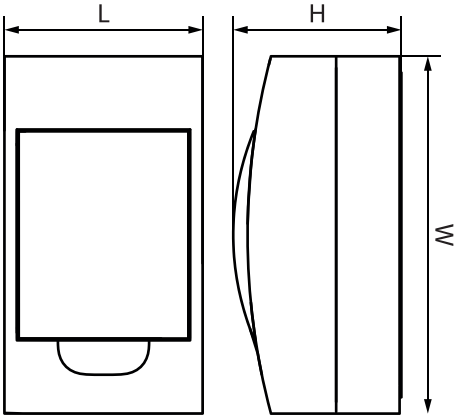

Indeks	W [mm]	L [mm]	H [mm]
RDN-IP40-NPE-02P	130	49	85
RDN-IP40-NPE-04P	200	111	93
RDN-IP40-NPE-06P	200	148	97
RDN-IP40-NPE-08P	200	184	96
RDN-IP40-NPE-12P	200	254	96
RDN-IP40-NPE-18P	219	362	97
RDN-IP40-NPE-24P	324	271	98
RDN-IP40-NPE-36P	457	269	100



increased material resistance to weather conditions



modern design



easy access to the equipment and cabling

Schelinger code	EAN	package	terminals
RDN-IP40-NPE-02P	5900280996282	1/200	1x2P
RDN-IP40-NPE-04P	5900280996299	1/30	4N+4PE 1x4P
RDN-IP40-NPE-06P	5900280996305	1/30	6N+6PE 1x6P
RDN-IP40-NPE-08P	5900280996312	1/30	8N+8PE 1x8P
RDN-IP40-NPE-12P	5900280996329	1/20	12N+12PE 1x12P
RDN-IP40-NPE-18P	5900280996336	1/10	18N+18PE 1x18P
RDN-IP40-NPE-24P	5900280996343	1/10	24N+24PE 2x12P
RDN-IP40-NPE-36P	5900280996428	1/5	36N+36PE 3x12P

FLUSH-MOUNTED SWITCHBOARDS

Unterputzverteiler IP40 Terminal

RDP

MATERIAL ► PC, ABS
MATERIAL ► PC, ABS

NEW

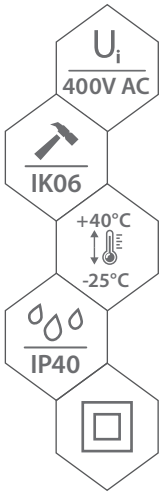



RDP-12P



RDP-24P

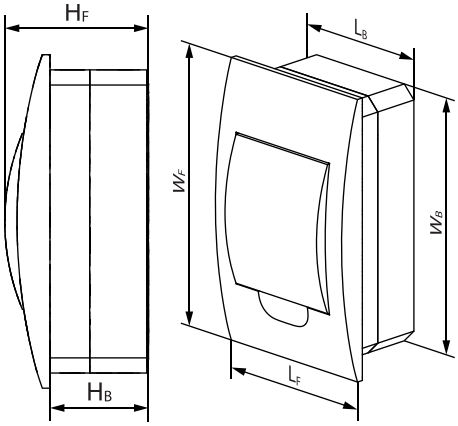

Indeks	W_F [mm]	L_F [mm]	H_F [mm]
RDP-IP40-NPE-04P	221	135	87
RDP-IP40-NPE-06P	221	171	88
RDP-IP40-NPE-08P	221	208	87
RDP-IP40-NPE-12P	221	280	88
RDP-IP40-NPE-18P	252	399	86
RDP-IP40-NPE-24P	341	300	98
RDP-IP40-NPE-36P	480	300	98
Indeks	W_B [mm]	L_B [mm]	H_B [mm]
RDP-IP40-NPE-04P	199	115	58
RDP-IP40-NPE-06P	200	150	58
RDP-IP40-NPE-08P	195	186	58
RDP-IP40-NPE-12P	196	256	58
RDP-IP40-NPE-18P	215	362	65
RDP-IP40-NPE-24P	310	257	65
RDP-IP40-NPE-36P	449	257	65



increased material resistance to weather conditions



modern design



easy access to the equipment and cabling

Schelinger code	EAN	package	terminals
A80-RDP-IP40-NPE-04P	5900280996282	1/30	4N+4PE 1x4P
A80-RDP-IP40-NPE-06P	5900280996299	1/30	6N+6PE 1x6P
A80-RDP-IP40-NPE-08P	5900280996305	1/20	8N+8PE 1x8P
A80-RDP-IP40-NPE-12P	5900280996312	1/20	12N+12PE 1x12P
A80-RDP-IP40-NPE-18P	5900280996329	1/10	18N+18PE 1x18P
A80-RDP-IP40-NPE-24P	5900280996336	1/10	24N+24PE 2x12P
A80-RDP-IP40-NPE-36P	5900280996343	1/5	36N+36PE 3x12P

SELF-AMALGAMATING AND INSULATING TAPE

TSW, PVC

SELBSTVERSCHWEISSENDES BAND, ISOLIERBAND

MATERIAL ► PVC, PIB

MATERIAL ► PVC, PIB

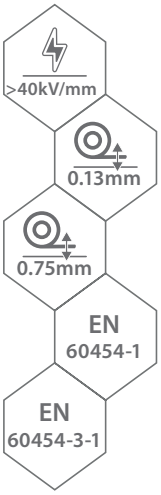



PVC19

PVC15



TSW

BEMKO code	EAN	package	colour	dimensions (width / length)
E30-TSW1905	5908311364352	1/100	black	19 mm / 5 m
E30-PVC1510BL	5908311362457	10/500	black	15 mm / 10 m
E30-PVC1510BU	5908311364277	10/500	blue	15 mm / 10 m
E30-PVC1510RE	5908311364284	10/500	red	15 mm / 10 m
E30-PVC1510WH	5908311364291	10/500	white	15 mm / 10 m
E30-PVC1510YG	5908311364307	10/500	green and yellow	15 mm / 10 m
E30-PVC1510YE	5908311364680	10/500	yellow	15 mm / 10 m
E30-PVC1510GR	5908311364673	10/500	green	15 mm / 10 m
E30-PVC1510ZC	5908311362464	10/500	multicolour	15 mm / 10 m
E30-PVC1920YE	5908311364680	10/250	yellow	19 mm / 20 m
E30-PVC1920GR	5908311364697	10/250	green	19 mm / 20 m
E30-PVC1920BL	5908311362471	10/250	black	19 mm / 20 m
E30-PVC1920BU	5908311364314	10/250	blue	19 mm / 20 m
E30-PVC1920RE	5908311364321	10/250	red	19 mm / 20 m
E30-PVC1920WH	5908311364338	10/250	white	19 mm / 20 m
E30-PVC1920YG	5908311364345	10/250	green and yellow	19 mm / 20 m
E30-PVC1920ZC	5908311362488	10/250	multicolour	19 mm / 20 m

CABLE TIE

KABELBINDER

MATERIAL ► polyamide PA66
MATERIAL ► polyamid PA66

CT

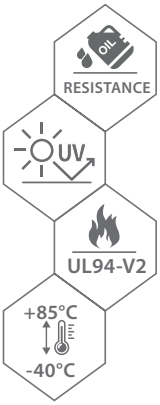





BEMKO code	EAN	package	colour	dimensions (length / width)
E40-CTB25100-100	5900280903808	100	black	100/2.5
E40-CTB25100-25	5900280903815	25	black	100/2.5
E40-CTB36140-100	5900280903822	100	black	140/3.6
E40-CTB36140-25	5900280903839	25	black	140/3.6
E40-CTB48200-100	5900280903846	100	black	200/4.8
E40-CTB48200-25	5900280903853	25	black	200/4.8
E40-CTB48300-100	5900280903860	100	black	300/4.8
E40-CTB48300-25	5900280903877	25	black	300/4.8
E40-CTB48370-100	5900280903884	100	black	370/4.8
E40-CTB48370-25	5900280903891	25	black	370/4.8
E40-CTW36140-100	5900280903723	100	white	140/3.6
E40-CTW48200-100	5900280903747	100	white	200/4.8
E40-CTW48300-100	5900280903761	100	white	300/4.8
E40-CTW48300-25	5900280903778	25	white	300/4.8
E40-CTW48370-100	5900280903785	100	white	370/4,8
E40-CTW48370-25	5900280903792	25	white	370/4.8
E40-CTM-100	5900280903907	100	colour mix	mix 100÷300 / 2.5÷4.8

STARTER, ELECTRONIC BALLAST

STARTER, ELEKTRONISCHES VORSCHALTGERÄT

S





S02



S10

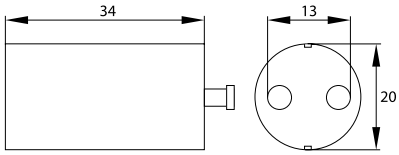

BEMKO code	EAN	package	description	P power [W]
E50-S02	5908311361061	25/1000	starter for fluorescent lamps (igniter)	4 ÷ 22
E50-S10	5908311361078	25/1000	starter for fluorescent lamps (igniter)	4 ÷ 80

SOCKET, CERAMIC SOCKET

CERAMIC SOCKETS AND ADAPTERS
KERAMISCHE FASSUNGEN

E, G

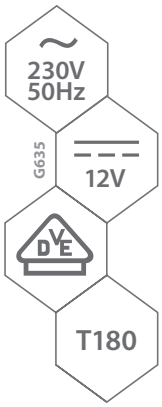



G635



G9



GU10



E14-F524



E27-F519



E27-EF510C



E27-F519U



E27-F519L

BEMKO code	EAN	package	socket type	I_{max} maximum load [A]
E10-G635	5908311360927	50/2000	G6,35	4
E10-G900	5908311360934	50/1000	G9	2
E10-GU10	5908311360941	50/1000	GU10	2
E15-E14-F524	5908311361306	1/100/400	E14	4
E15-E27-EF510C	5908311362440	1/10/120	E27	4
E15-E27-F519	5908311361313	1/10/200	E27	4
E15-E27-F519L	5900280905826	1/10/200	E27	4
E15-E27-F519U	5900280905833	1/10/200	E27	4

WE ARE BEMKO GROUP

BEMKO GROUP

BEMKO

We are a Polish manufacturer and a reputable distributor of high-quality lighting and electrotechnical devices. We have been operating in the electrotechnical industry on the domestic and European markets for over 15 years. We enjoy our work and care about the comfort and satisfaction of our Customers by offering professional and individual solutions while providing continuous commercial, technical, marketing, and logistic support.

www.bemko.pl





LUXMENA

LUXMENA – established to meet the growing demand for premium quality products made in Poland. It includes linear decorative fixtures, spots and a wide range of fixtures for industrial applications. High configuration flexibility makes it easy to match the luminaires to the diverse requirements of individual clients and to each investment.

www.luxmena.pl

Schelinger

Schelinger – sets the highest standards inelectrical installation safety. Our equipment systems are designed to provide the highest performance, minimise downtime, and prevent accidental tripping.

SCHELINGER products are backed by a 5-year warranty.

www.schelinger.pl



COLOUR TEMPERATURE

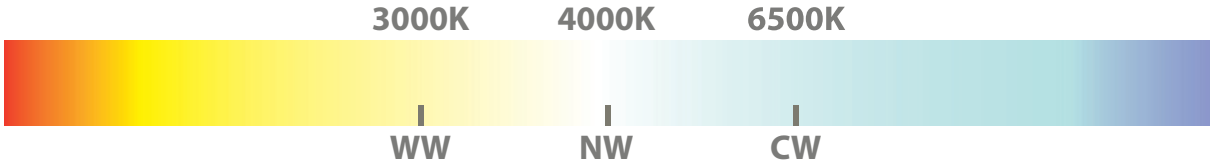

Warm colour (WW)



Neutral colour (NW)



Cold colour (CW)



ANY ENCLOSURE COLOUR – PAINTING METHODS



Luminaires marked with a RAL symbol in the catalogue are made to special order. Depending on the material the luminaire is made of, our specialists select the best possible painting technique.

Powder coating is the most durable method of colouring metal surfaces and components. The applied special powdered paint is cured using high temperatures of up to 200°C. The paint using this method forms a perfectly uniform coating on the component.

Spray painting is an effective method that allows parts and workpieces made of almost all plastics to be accurately coated with paint. The dye is applied to the surface using a spray method.



We use powder coating for the following luminaires:
QLS, QLR, HBT, HBL, BLD, SKL, TLR.

Spray painting is used for the following components:
ceiling light fixtures, such as PSF711-712, LED panels, DLM, DLU, DLO, SLS.

IP DEGREE OF PROTECTION

Degree of protection against water and foreign bodies provided by the enclosure. The first numeral after the IP index refers to the protection against the ingress of solid objects. The second numeral rates the protection against the ingress of water into the enclosure.

IP0x none
IP1x protection against objects >50 mm in size (hand contact)
IP2x protection against objects >12.5 mm in size (finger contact)
IP3x protection against objects >2.5 mm (screwdriver contact)
IP4x protection against objects >1 mm (thin cable)
IP5x protection against the ingress of dust in quantities that do not interfere with operation of the unit
IP6x total protection against the ingress of dust

IPx0 lack of protection
IPx1 protection against water droplets falling vertically (from condensation)
IPx2 protection against water droplets falling on the enclosure at an angle of 15°
IPx3 protection against drops falling at an angle of 60° from the vertical
IPx4 protection against drops falling from any angle, from all sides (rain)
IPx5 protection against water jets from any direction
IPx6 protection against strong jets of water or wave flooding from any direction
IPx7 protection against flooding if immersed during 30 minutes
IPx8 protection against flooding if under continuous immersion and increased water pressure (1 m depth)
IPx9 protection against flooding by pressurised water jets (80-100 bar, up to +80°C)





UGR – DISCOMFORT GLARE INDEX

The glare of a luminaire can be unpleasant, disturbing, or blinding, leading to discomfort for workers and posing a risk to safety and efficacy at work. The lighting standard defines safe levels of glare. UGR (Unified Glare Rating) is <22 for high-bay warehouses and <25 for production halls.
Luminaires with UGR<19 are perfect for office spaces.
They do not cause eye fatigue and increase working comfort.

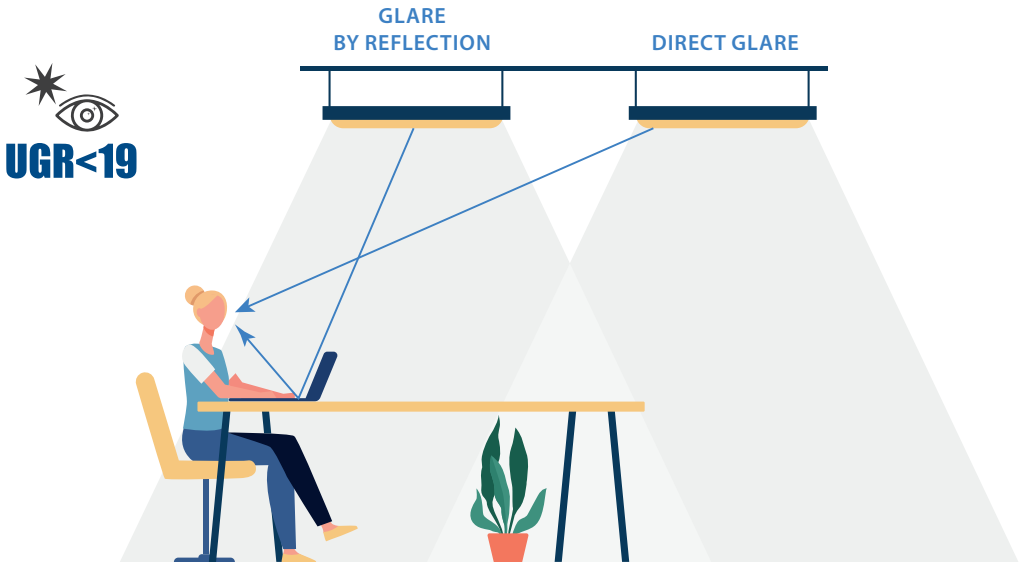

TYPES AND ADJUSTMENT OF SENSORS

PIR
INFRARED MOTION SENSOR

Activates connected components when it detects a large temperature difference (between body and air temperature)



MS/MD
MICROWAVE MOTION SENSOR

The system generates microwaves that bounce off objects and return to the sensor. If it detects a moving object, it activates the connected components.



MS - microwave motion sensor
MD - microwave motion sensor with half-shadow function

WZ
TWILIGHT SWITCH

The device has a light-sensitive photoresistor that activates the connected components when dusk falls.



SENS - sensitivity adjustment (sensor detection range)

TIME - lighting maintenance time adjustment

LUX - external light intensity threshold adjustment (after exceeding the intensity threshold, the sensor will switch on connected receivers)

ADJUSTMENT FLAT
(POTENTIOMETER)



STEPPING ADJUSTMENT 0/1
(DIP - switch)



LEGEND



Supply voltage: 230 V, alternating current
Nennspannung: 230 V AC



Supply voltage: 12 V, direct current
Nennspannung: 12 V DC



Maximum load
Maximalbelastung



Maximum power of light source
Maximale Leistung der Lichtquelle



Phase shift factor (cos φ1)
Verschiebungsfaktor (cos φ1)



Output voltage of the power supply
Ausgangsspannung des Einspeisers



Colour temperature
Farbtemperatur



Colour rendering index
Farbwiedergabeindex



Light distribution angle
Beleuchtungswinkel



Glare index
UGR-Wert



Degree of mechanical strength
Mechanische Festigkeitsklasse



Service life
Nennbetriebsspannung



Protection grade
Schutzart



Device operating temperature range
Betriebstemperaturb



Cable cross section 1 mm²
Leitungsquerschnitt 1mm²



The warranty depends on operating conditions: 24 h/day – 3-year warranty | 12 h/day – 5-year warranty
24-Stunden-Betrieb - 3 Jahre Garantie | 12-Stunden-Betrieb - 5 Jahre Garantie

LEGEND

Power on mode
Einschaltmodus

Standby power
Standby-Leistung

Non dimmable
Helligkeit nicht regelbar

Maximum current
Maximaler Strom

ENEC Certificate
ENEC-Zertifikat

VDE Directive
VDE-Richtlinie

Flicker-free
Kein flackernder Effekt

Resistance to UV radiation
Widerstand zu UV-Strahlung

Resistance for oils
Widerstand für Öle

Standard for Flammability of Plastic Materials
Kunststoff Brennbarkeitsklasse

Electric strength of the tape
Elektrische Stärke des Bandes

Maximum
Maximum load | IMaximale Belastung

Short-circuit-proof safety transformer
Short-circuit-proof safety transformer | Kurzschlussfester Sicherheitstransformator

Protection class (I, II, III)
Protection class (I, II, III) | Schutzklasse (I, II, III)

Due to the ongoing development of the product range, BEMKO Sp. z o.o. reserves the right to introduce (without notice) changes to technical parameters, equipment, extended warranty conditions, and product specifications. This catalogue does not constitute an offer or contract within the meaning of the law. Technical parameters of the luminaires are given to the best of our knowledge. However, inadvertent errors and misprints are possible.
Declared power and luminous flux values are given with an accuracy of +/-10%. For the sake of readability and due to the volume of the catalogue, the pictures are for illustrative purposes only. The content is up to date at the time of publication. Current prices and a detailed offer are available on our website:
www.bemko.eu

Due to the continuous development of the product range, BEMKO Sp. z o.o. reserves the right to implement (without notice) changes in technical parameters, equipment, terms of extended warranty and product specifications. This catalog does not represent an offer or contract as understood by law. The technical parameters of the luminaires are given to the best of our knowledge, but accidental errors and printing mistakes are possible. Declared values of power and luminous flux are given with an accuracy of +/-10%.
Due to the legibility and volume of the catalog, the presented drawings are for illustrative purposes only. The information contained is current at the time of publication.
Current prices and a detailed offer are available on our website:
www.bemko.eu

Aufgrund der ständigen Weiterentwicklung der Produktpalette behält sich BEMKO Sp. z o.o. das Recht vor, (ohne Vorankündigung) Änderungen der technischen Parameter, der Ausstattung, der erweiterten Garantiebedingungen und der Produktspezifikationen vorzunehmen. Dieser Katalog stellt weder ein Angebot noch einen Vertrag im Sinne des Gesetzes dar. Die technischen Daten der Leuchten sind nach bestem Wissen und Gewissen angegeben, jedoch sind versehentliche Fehler und Druckfehler möglich. Die deklarierten Werte für die Leistungsfähigkeit und den Lichtstrom werden mit einer Genauigkeit von +/-10% angegeben. Aufgrund der Lesbarkeit und des Umfangs des Katalogs dienen die gezeigten Abbildungen nur der Veranschaulichung. Die enthaltenen Informationen entsprechen dem Stand zum Zeitpunkt der Veröffentlichung.
Aktuelle Preise und ein detailliertes Angebot finden Sie auf unserer Website: **www.bemko.eu**



BEMKO GROUP

BEMKO LUXMENA Schelinger

tel. (022) 732 11 85
ul. Bocznicowa 13,
05-850 Jawczyce PL

www.bemko.pl

@bemkopolska @bemko_pl @bemkopolska @bemko